

Indica 2.4 GHz Chip Antenna

Part No. A10381

Product Specification

1 Features

- Designed for 2.4 GHz applications: Bluetooth[®] (BT, BT EDR, BT LE), Wi-Fi[®] (802.11a/b/g/n), ZigBee[®], etc.
- Ceramic chip antenna
- Low profile design for use with no ground beneath the antenna
- High efficiency
- Light weight
- Intended for SMD mounting
- Supplied in tape on reel


2 Description

Indica is intended for use with all 2.4 GHz applications. The antenna uses a ground plane in order to radiate efficiently, but this ground plane must not extend underneath the antenna itself.

Copper tracks on the host PCB are required for the antenna to work properly. For correct integration, it is important to follow very closely the footprint drawings, preferably importing the electronic files (dxf or Gerber) into the PCB layout CAD.

3 Applications

- Mobile phones
- PDAs
- PNDs
- Headsets
- PMPs / MP3s
- Electronic Shelf Labels
- PC-Cards
- Medical devices
- Sensors
- Laptops

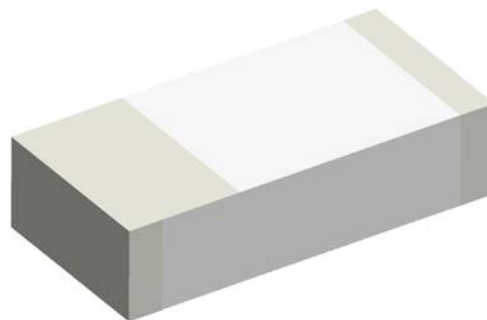

4 Part number

Indica: A10381



5 General data


Product name	Indica 2.4GHz Chip Antenna
Part Number	A10381
Frequency	2.4 – 2.5 GHz
Polarization	Linear
Operating temperature	-40 °C to +85 °C
Impedance with matching	50 Ω
Weight	<0.016g
Antenna type	SMD
Dimensions	3.3 x 1.6 x 0.65 [mm]
Footprint Size	3.3 x 1.6 [mm]

6 Electrical characteristics


	Typical performance	Conditions
Peak gain	1.5 dBi	All data measured on Antenova's reference board, part number A10381-U1 Data given for the 2.402 – 2.480 GHz frequency range
Average gain	-1.5 dBi	
Average efficiency	70%	
Maximum Return Loss	-10 dB	
Maximum VSWR	1.6:1	

7 Electrical performance


7-1 Return Loss

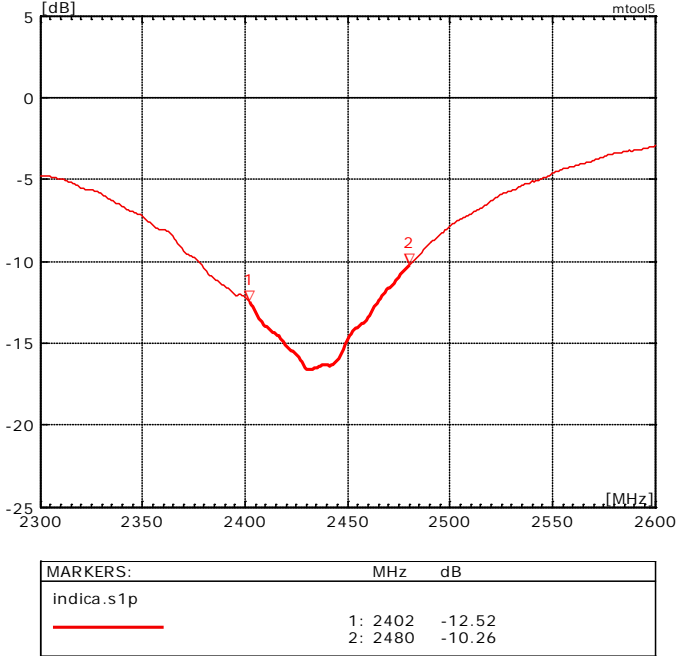

7-2 VSWR

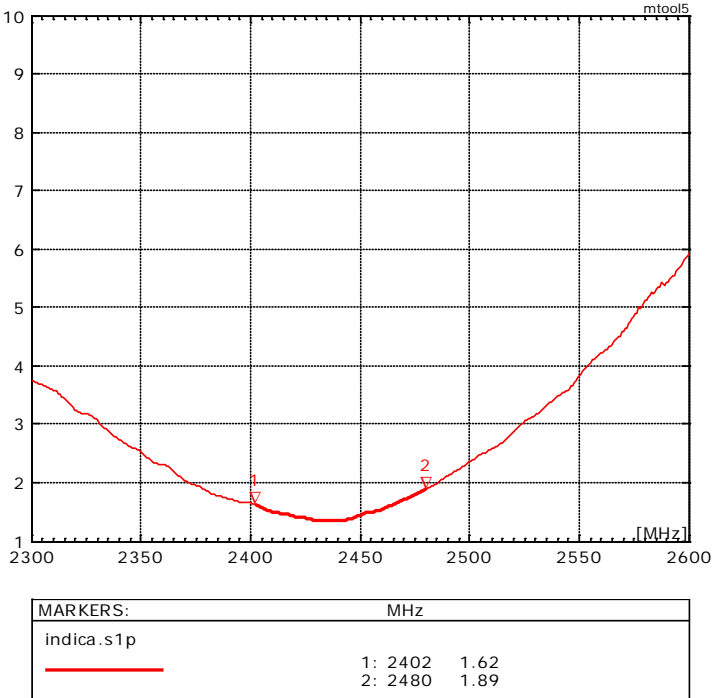


7-3 Antenna patterns

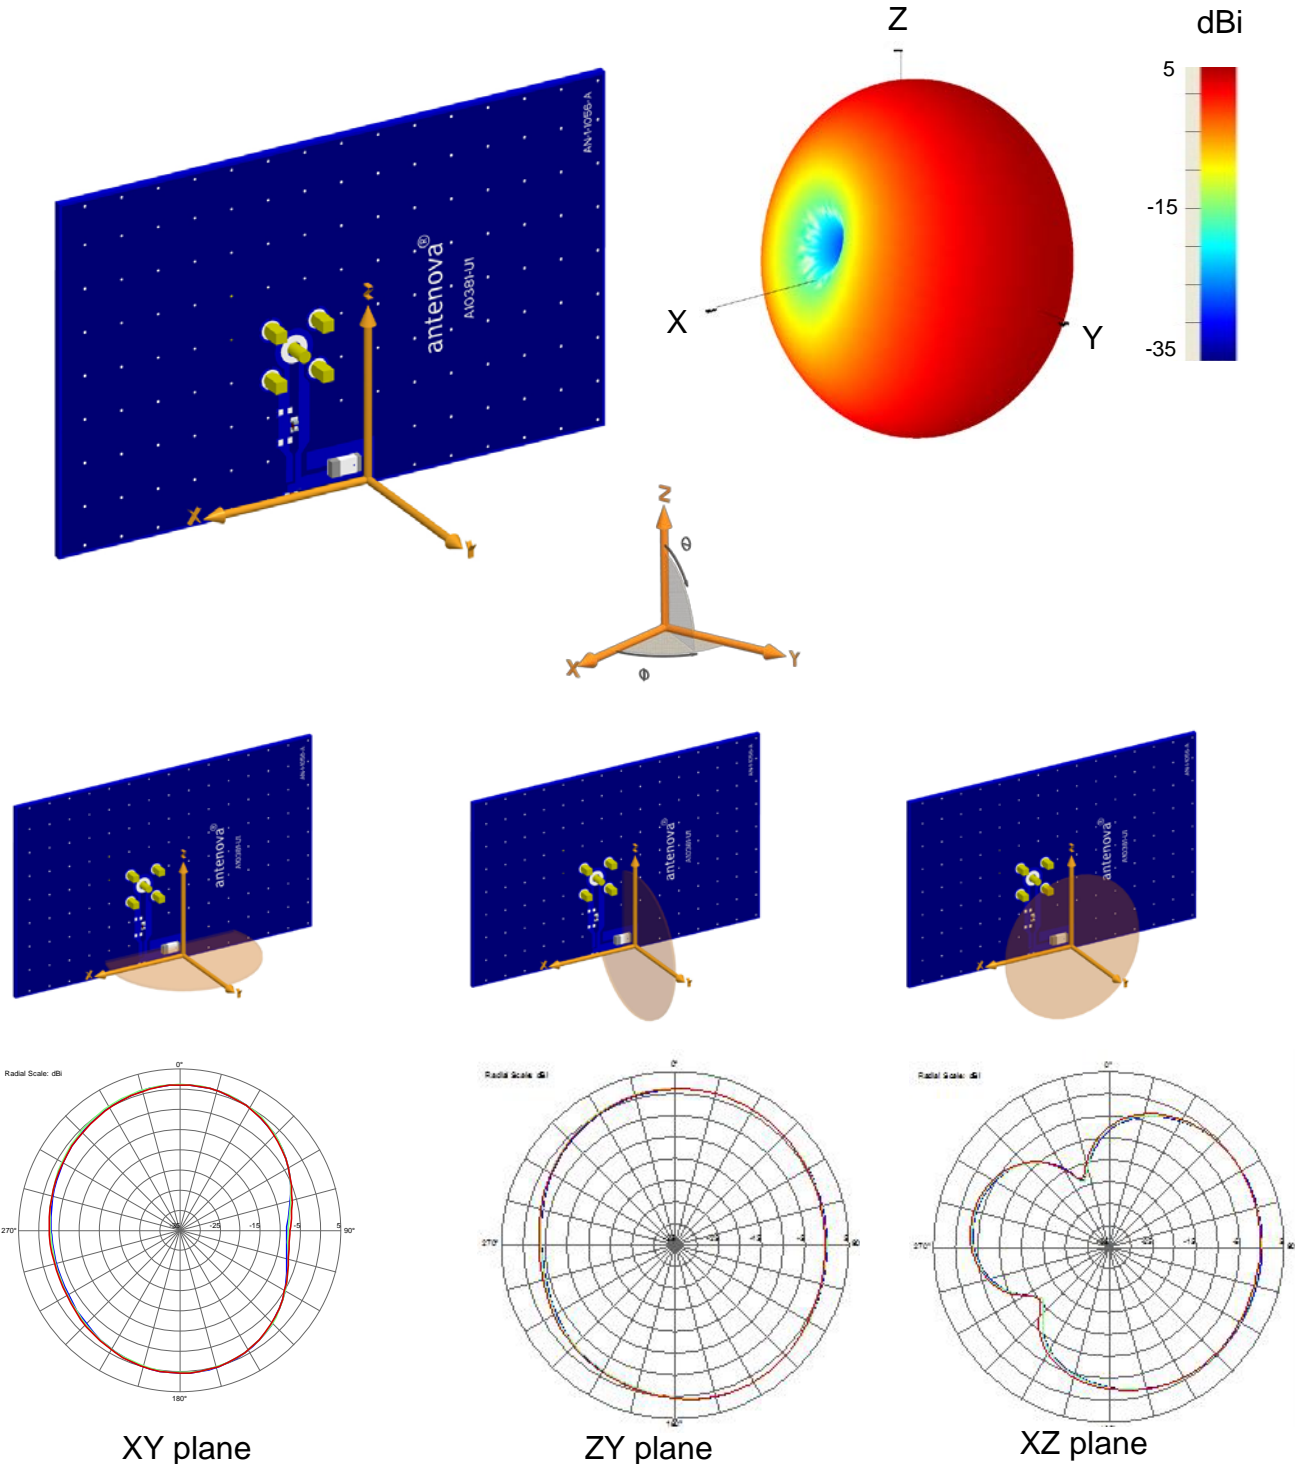

Patterns show combined polarisations
 measured on reference board A10381-U1


8 Antenna dimensions

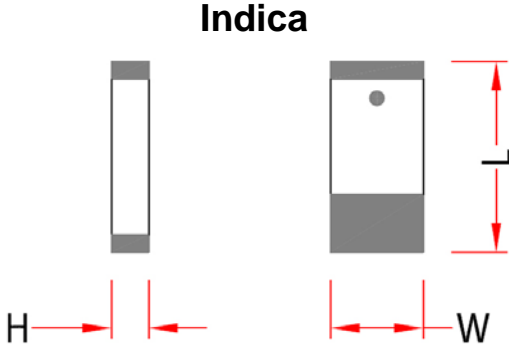

L	W	H
Length	Width	Height
3.30 ± 0.1	1.6 ± 0.15	0.65 ± 0.1

Dimensions in mm

9 Antenna footprint

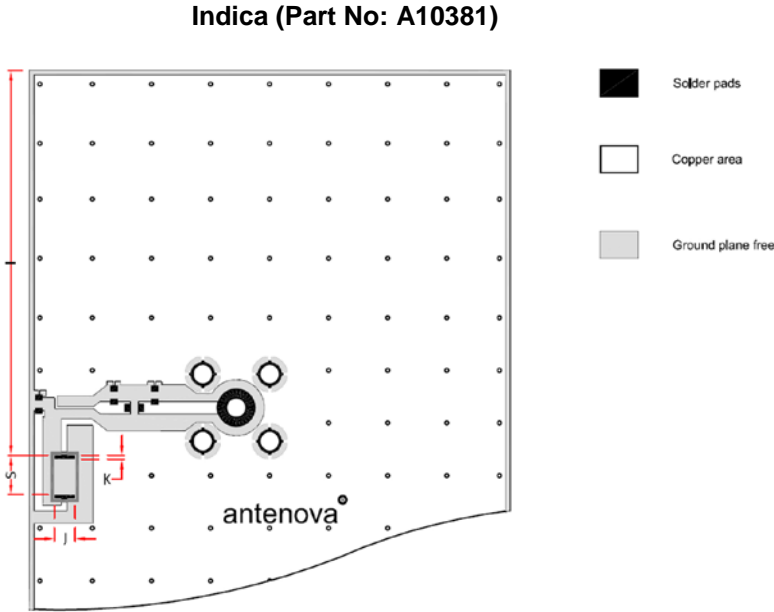

* CAD files of the antenna footprint are available from Antenova M2M on request. Please contact sales@antenova-m2m.com for further details.

I	S	K	J
29.27 ± 0.1	3 ± 0.1	0.3 ± 0.1	1.6 ± 0.1

Dimensions in mm

10 Electrical interface


10-1 Transmission lines

- All transmission lines should be designed to have a characteristic impedance of 50 Ω
- The length of the transmission lines should be kept to a minimum
- Any other parts of the RF system like transceivers, power amplifiers, etc, should also be designed to have an impedance of 50 Ω

Once the material for the PCB has been chosen (PCB thickness and dielectric constant), a coplanar transmission line can easily be designed using any of the commercial software packages for transmission line design. For the chosen PCB thickness, copper thickness and substrate dielectric constant, the program will calculate the appropriate transmission line width and gaps on either side of the track so the characteristic impedance of the coplanar transmission line is 50 Ω .

10-2 Copper Track

The copper tracks etched on the PCB form an integral part of the antenna, and any deviation from the advised layout shown below will result in a loss in the antenna performance. It is best that the copper track layout is imported from CAD files which are available from Antenova M2M on request. Please contact sales@antenova-m2m.com for further details.

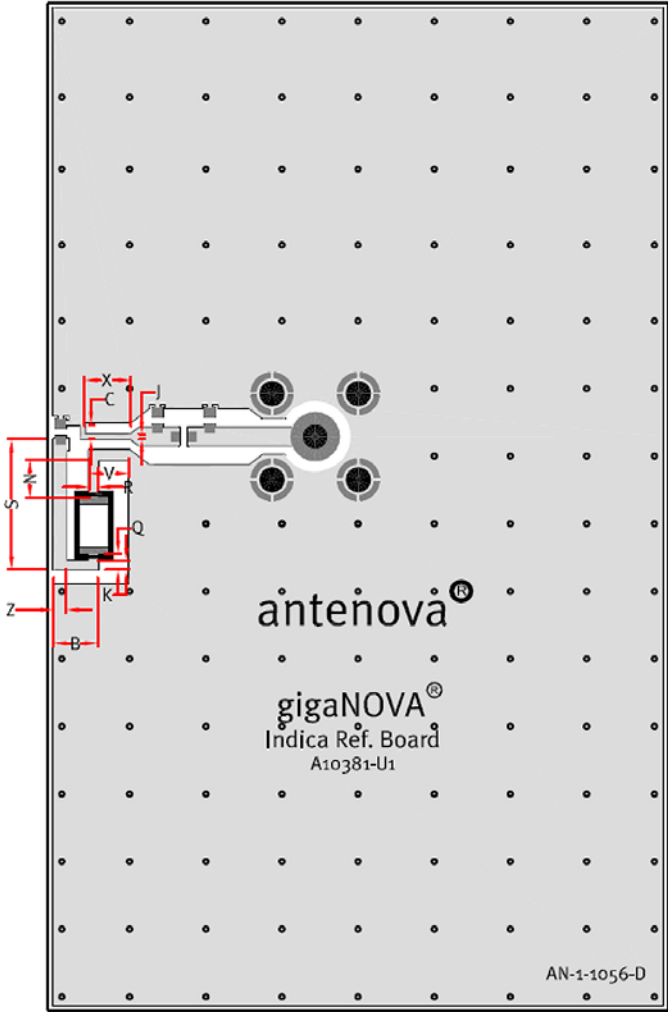


Z	B	K	Q	S	N	V	R	X	C	J
0.75 ± 0.1	2.6 ± 0.1	0.5 ± 0.1	0.95 ± 0.1	7.7 ± 0.1	2.25 ± 0.1	2.40 ± 0.1	0.5 ± 0.1	2.73 ± 0.1	0.85 ± 0.1	0.25 ± 0.1

Dimensions in mm

10-3 Matching circuit

The antenna requires a matching circuit that must be optimized for each customer's product. The matching circuit will require up to three components (0402 size), and an additional tuning element is also required (0402 size) the following pad layout should be designed into the device so the correct circuit can be installed.

Note: The tuning element by default is a 0402 zero ohm resistor

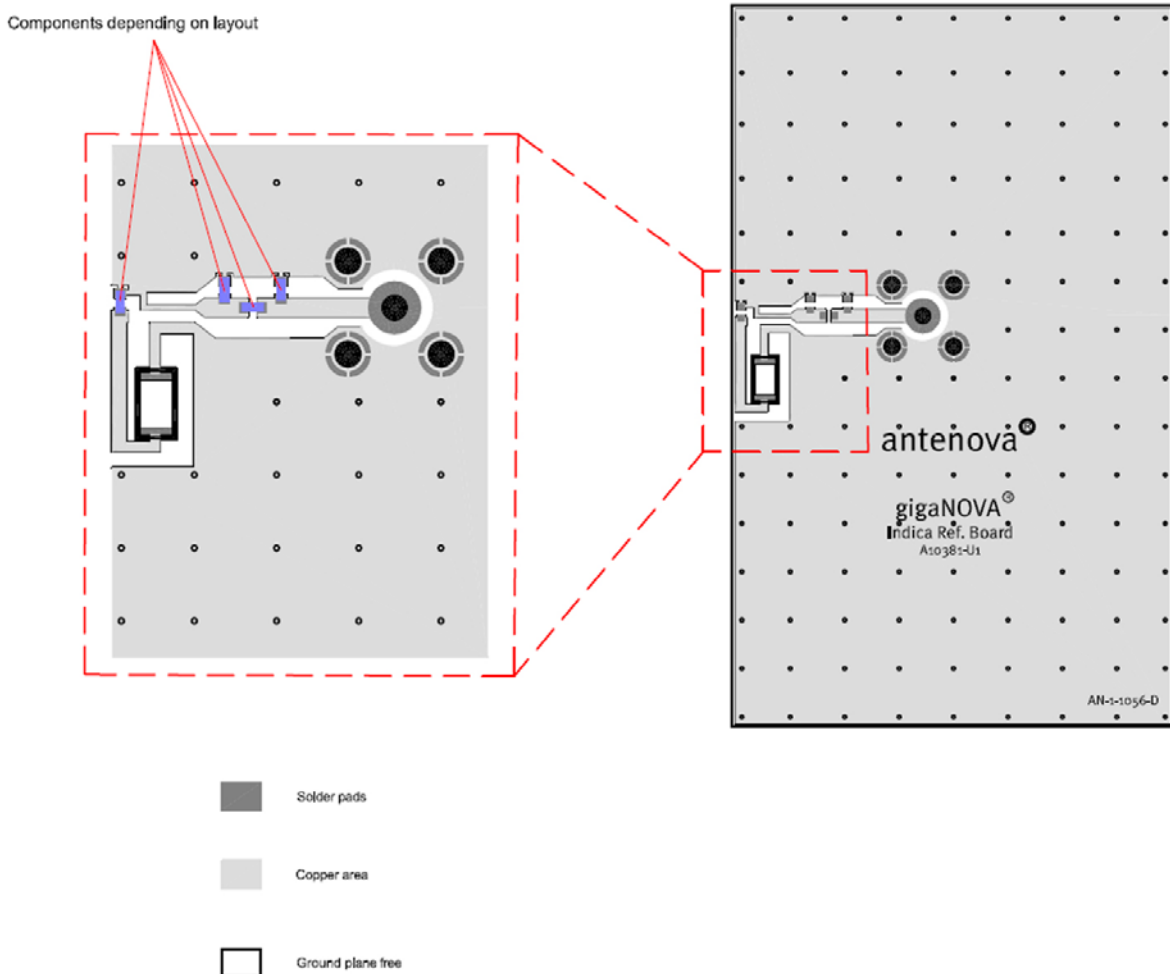


In addition to the matching circuit, a separate DC blocking capacitor will also be required between the radio and the antenna matching circuit.

Note: The component values for the matching circuit will vary depending on the size of the PCB and surrounding components. The impedance of the antenna should be measured before selecting suitable matching components. Antenova M2M offers this service on request. Contact sales@antenova-m2m.com for further information.

10-4 Antenna placement

Antenova M2M strongly recommends placing the antenna near the edge of the board. Maximum antenna performance is achieved by placing the antenna towards the middle of the PCB, as shown in the diagram below. Other configurations are possible but recommend contacting Antenova for advice on any other antenna placement options.

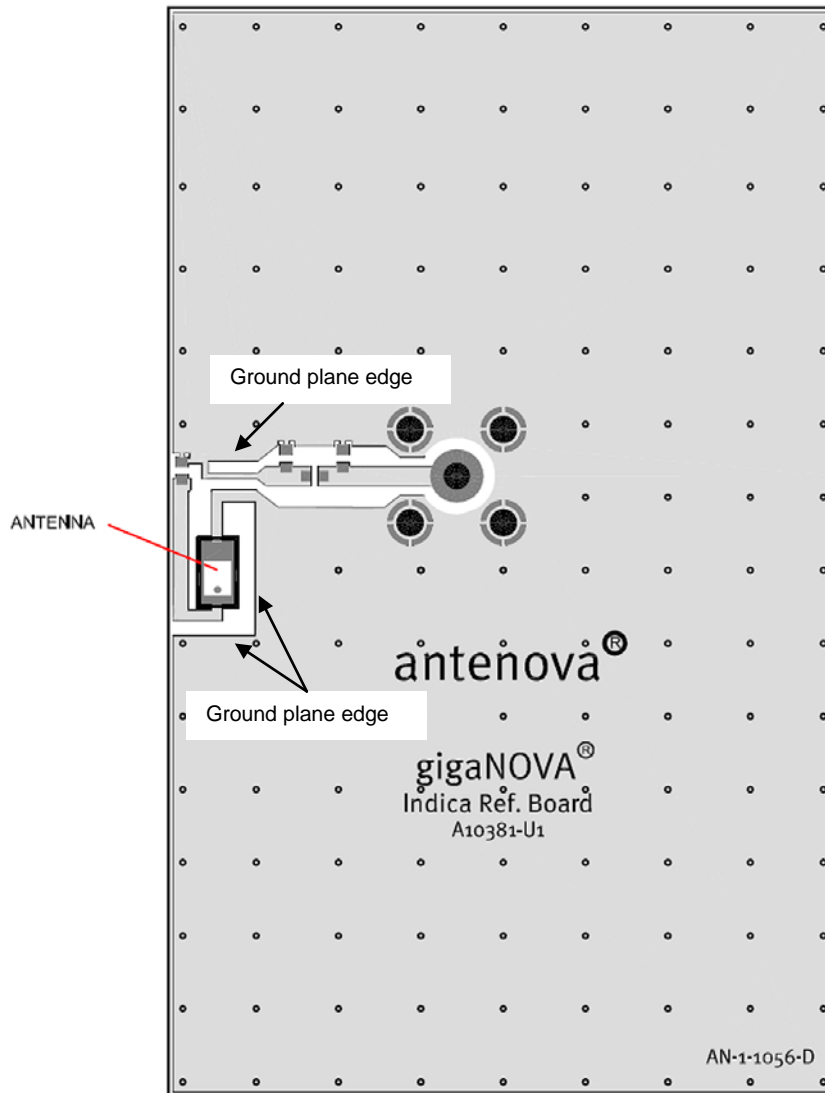


Additional electronic components near the antenna should be at a distance of at least 2 mm away from the ground plane edges. The antenna should also be clear of ground from both the top surface of the antenna and below the antenna.

10-5 Reference board

The reference board has been designed for evaluation purposes of Indica 2.4 GHz and it includes a SMA female connector

Indica A10381-U1 Reference Board

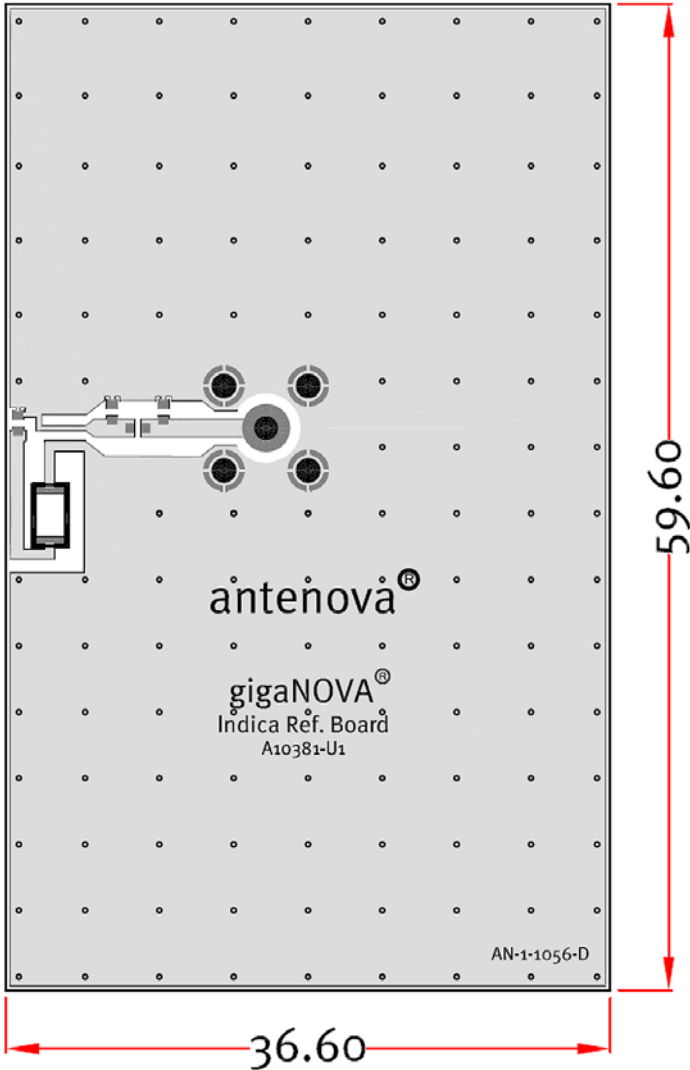

Dimensions in mm

To order a reference board contact sales@antenova-m2m.com.

11 Soldering

This antenna is suitable for lead free soldering.

The reflow profile should be adjusted to suit the device, oven and solder paste, while observing the following conditions:

- The maximum temperature should not exceed 240 °C
- However for lead free soldering, a maximum temperature of 255 °C for no more than 20 seconds is permitted.
- The antenna should not be exposed to temperatures exceeding 120 °C more than 3 times during the soldering process.

12 Hazardous material regulation conformance

The antenna has been tested to conform to RoHS requirements. A certificate of conformance is available from Antenova M2M's website.

13 Packaging


13-1 Optimal storage conditions for packaged reels

Temperature	-10°C to 40°C
Humidity	Less than 75% RH
Shelf Life	18 Months
Storage place	Away from corrosive gas and direct sunlight
Packaging	Reels should be stored in unopened sealed manufacturer's plastic packaging.

Note: Storage of open reels of antennas is not recommended due to possible oxidization of pads on antennas. If short term storage is necessary, then it is highly recommended that the bag containing the antenna reel is re-sealed and stored in like storage conditions as in above table.

13-2 Tape characteristics

Indica

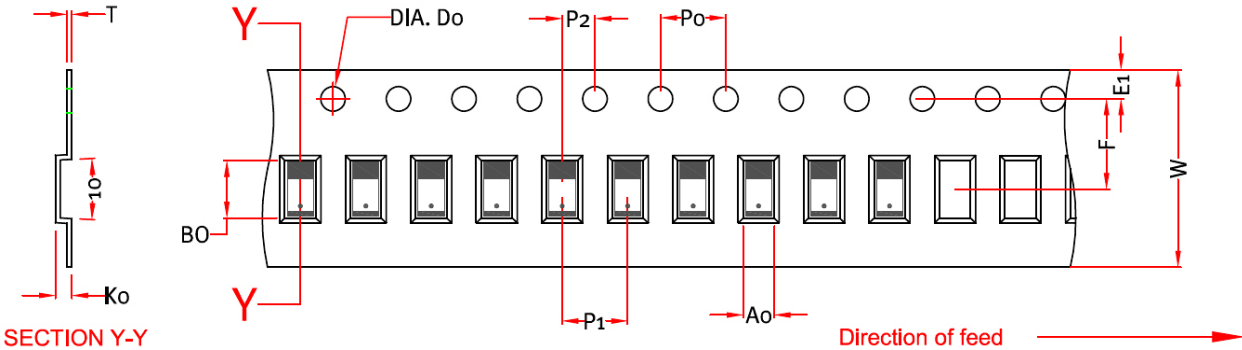


W	F	E1	P0	P1	P2	A0	B0	K0	T	D0
12 ± 0.3	5.5 ± 0.05	1.75 ± 0.1	4 ± 0.1	4 ± 0.1	2 ± 0.05	1.9 ± 0.1	3.5 ± 0.1	1.0 ± 0.1	0.3 ± 0.05	1.5 ± 0.1

Dimensions in mm

Quantity	Leading Space	Trailing Space
5000 pcs / reel	16 blank antenna holders	24 blank antenna holders

13-3 Reel dimensions

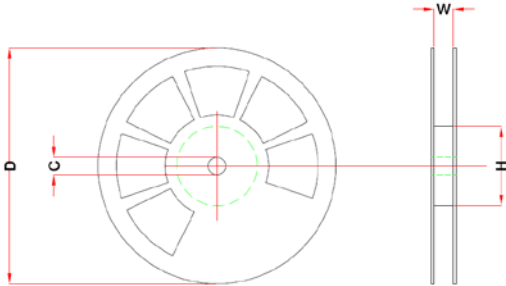

Width (W)	Reel Diameter (D)	Hub Diameter (H)	Shaft Diameter (C)
11.5 ±2.0 mm	178 ±2.0 mm	60 ±1.0 mm	13.5 ±1.0 mm

13-4 Box dimensions



Width W	Breadth B	Thickness H
340 mm	350 mm	47 mm

13-5 Bag properties

Reels are supplied in protective plastic packaging.

13-6 Reel label information

Indica



Dimensions in mm



www.antenova-m2m.com

Corporate Headquarters

Antenova Ltd.
Far Field House
Albert Road
Stow-cum-Quy
Cambridge
CB25 9AR

Tel: +44 1223 810600
Fax: +44 1223 810650
Email: sales@antenova-m2m.com

North America Headquarters

Antenova Ltd.
Rogers Business Park
2541 Technology Drive Suite 403
Elgin, IL 60124

Tel: +1 (847) 551 9710
Fax: +1 (847) 551 9719
Email: sales@antenova-m2m.com

Asia Headquarters

Antenova Asia Ltd.
4F, No. 324, Sec. 1, Nei-Hu Road
Nei-Hu District
Taipei 11493
Taiwan, ROC

Tel: +886 (0) 2 8797 8630
Fax: +886 (0) 2 8797 6890
Email: sales@antenova-m2m.com

Copyright® 2013 Antenova Ltd. All Rights Reserved. Antenova®, Antenova M2M, gigaNOVA®, and the Antenova and Antenova M2M logos are trademarks and/or registered trademarks of Antenova Ltd. Any other names and/or trademarks belong to their respective companies.

The materials provided herein are believed to be reliable and correct at the time of print. Antenova does not warrant the accuracy or completeness of the information, text, graphics or other items contained within these information. Antenova further assumes no responsibility for the use of this information, and all such information shall be entirely at the user's risk.



Certificate No: 4598

Antennas for Wireless M2M Applications