


TOP ENTRY PCB JACK


YIMTEX .

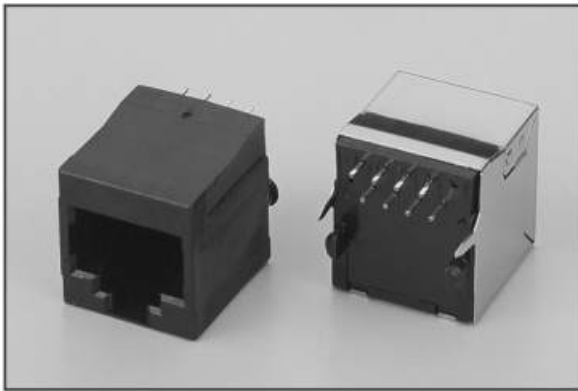


MATERIAL

Shielded: 0.25mm Thickness Copper Alloy With Tin Plated
 Housing: Standard Material Glass Filled Polyester (UL94V-0)
 Standard Color Black
 Contact : 0.35mm Thickness Alloy C5210, Gold Plating Over
 Nickel in Contact Area.
 Tin Plating Over Nickel in Solder Area.


METAL SHELL

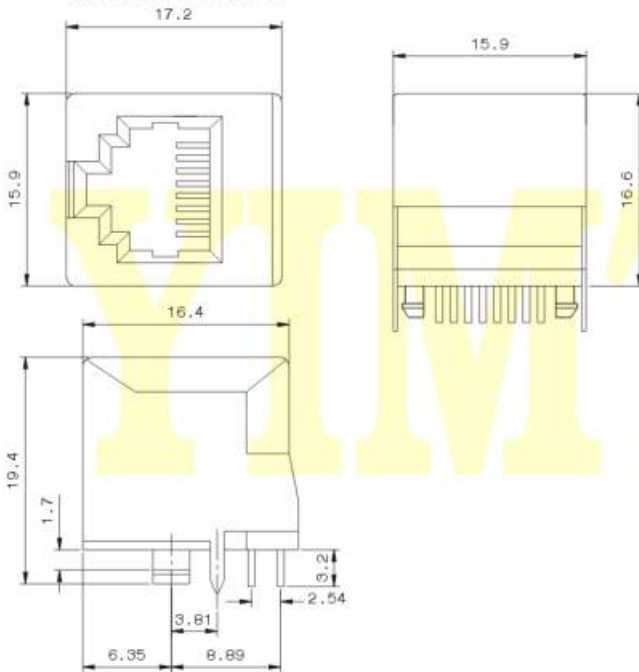


P.C.B. LAYOUT

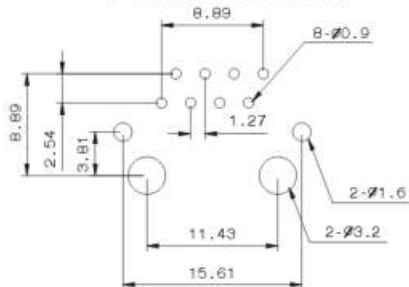

ALL PLASTIC

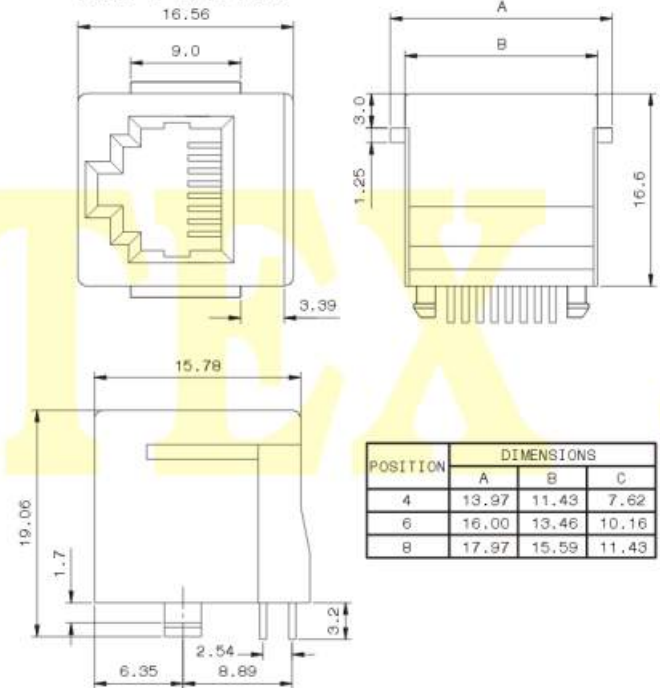

P.C.B. LAYOUT

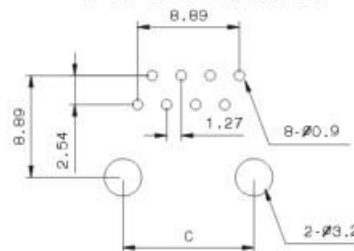

POSITION	DIMENSIONS		
	A	B	C
4	13.97	11.43	7.62
6	16.00	13.48	10.16
8	17.97	15.59	11.43

ORDER INFORMATION:

Series No.	Pins	Contact Plating
241A	8P8C	S
All Plastic	8P4C	S: Selective Gold
	8P6C	S1: 5u" Selective Gold
	8P8C	S2: 15u" Selective Gold
		S3: 30u" Selective Gold

Series No.	Pins	Contact Plating
241M	8P8C	S
Metal Shell	8P8C	S: Selective Gold
		S1: 5u" Selective Gold
		S2: 15u" Selective Gold
		S3: 30u" Selective Gold