



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 01/09/09	~	

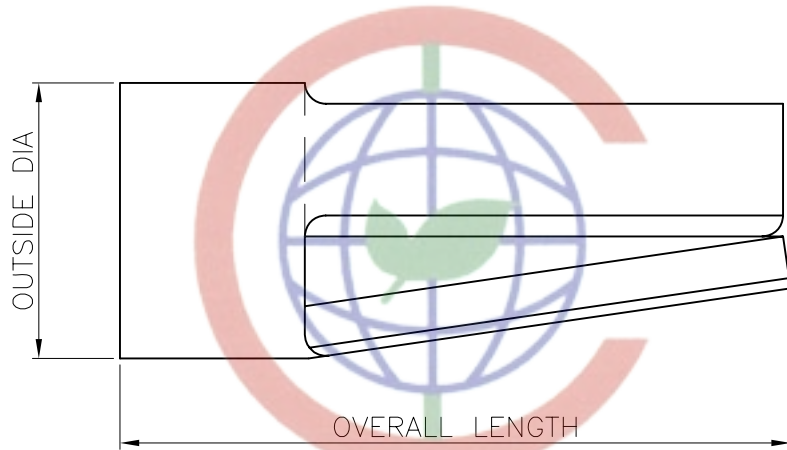

THREE CONTACT POINTS

TECHNICAL SPECIFICATIONS:

- 1.MATERIAL: BERYLLIUM COPPER
- 2.RATDE CURRENT: 1A
- 3.CONTACT RESISTANCE: 10mΩ MAXIMUM.
- 4.PRODUCT NUMBER CODE:

DS1008-01 - CF X
 L PART NUMBER CODE
 T-1*
 T-1L*
 T-2
 SEE TABEL A:

TABEL A:

PART NUMBER	OUTSIDE DIAMETER	OVERALL LENGTH	OPERATING RANGE PIN DIA.	TEST PIN DIAMETER	MAXIMUM INSERTION FORCE	MINIMUM WITHDRAWAL FORCE
CFT-1*	0.787	1.905	0.381-0.508	0.432	80 GM	15 GM
CFT-1L*	0.787	1.905	0.381-0.533	0.457	90 GM	14 GM
CFT-2	0.813	1.270	0.381-0.457	0.432	400 GM	100 GM
CFT-3	0.787	1.905	0.381-0.508	0.432	42 GM	14 GM
CFT-3X	0.787	1.905	0.381-0.533	0.457	35 GM	14 GM
CFT-4	0.597	1.651	0.178-0.330	0.279	30 GM	9 GM
CFT-5	0.498	1.346	0.152-0.279	0.203	30 GM	10 GM

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	THREE FINGER CLIPS	
X.	±0.20	X.	±2°	UNITS	mm			
.X	±0.15	.X	±1°	SHEET SIZE	A4	SERIES	DS1008-01	
.XX	±0.10	.XX	±0.5°					
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.	C-DS1008-01-X							

Tel:86-574-63508787
 Fax:86-574-63510817
 E-mail:sale@zhengjin.com.cn
 Http://www.Connfly.com.cn

East Zone Kuanqun
 Town Cixi Ningbo China