


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 01/09/09		

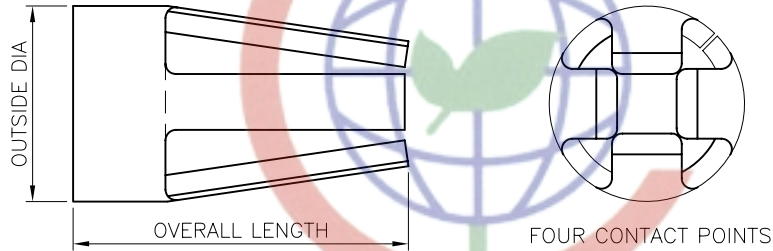

TABEL A:

PART NUMBER	OUTSIDE DIAMETER	OVERALL LENGTH	OPERATING RANGE PIN DIA.	TEST PIN DIAMETER	MAXIMUM INSERTION FORCE	MINIMUM WITHDRAWAL FORCE
CF-1S	1.118	1.651	0.381-0.559	0.457	135 GM	25 GM
CF-1SH	1.118	1.651	0.381-0.559	0.457	260 GM	55 GM
CF-3S*	1.118	1.651	0.381-0.559	0.457	520 GM	120 GM
CF-1L	1.118	2.108	0.381-0.559	0.457	45 GM	15 GM
CF-3*	1.118	2.108	0.381-0.635	0.432	270 GM	90 GM
CF-3H	1.118	2.108	0.381-0.635	0.457	675 GM	200 GM
CF-4	1.346	2.972	0.559-0.813	I - 0.660 W - 0.610	385 GM	50 GM
CF-5	1.753	3.810	0.914-1.270	I - 1.016 W - 0.762	325 GM 55 GM	60 GM 15 GM
CF-6	2.032	3.810	1.016-1.499	I - 1.270 W - 1.016	375 GM	35 GM
CF-7S	1.626	2.413	0.813-1.143	1.016	2.27 KG	200 GM
CF-7	1.613	3.048	0.813-1.168	I - 1.041 W - 0.991	350 GM	55 GM
CF-7L	1.626	3.048	0.813-1.143	I - 1.016 W - 0.889	1.02 KG	110 GM
CF-8	2.235	3.150	1.219-1.626	I - 1.524 W - 1.270	440 GM	60 GM
CF-9	2.743	3.759	1.651-2.083	I - 1.880 W - 1.829	1.36 KG	230 GM

# CONNFLY

TECHNICAL SPECIFICATIONS:

- 1.MATERIAL: BERYLLIUM COPPER
- 2.RATDE CURRENT: 1A
- 3.CONTACT RESISTANCE: 10mΩ MAXIMUM.
- 4.PRODUCT NUMBER CODE:

DS1008-02 - CF X

└ PART NUMBER CODE  
1S  
1SH  
3S\*  
SEE TABEL A:

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	FOUR FINGER CLIPS		
X.	±0.20	X.	±2°	UNITS	mm	SERIES	DS1008-02		
.X	±0.15	.X	±1°	SHEET SIZE	A4				
.XX	±0.10	.XX	±0.5°						
DRAWING TYPE		CUSTOMER				晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
SCALE		1:1	SHEET						1 OF 1
DRAWING NO.		C-DS1008-02-X							

Fax:86-574-63510817

E-mail:sale@zhenqin.com.cn

Http://www.connfly.com

Address: East 1st Floor, Zone 1, Kunming Yunnan  
Town Cixi Ningbo, China