



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 09/08/08'	~	

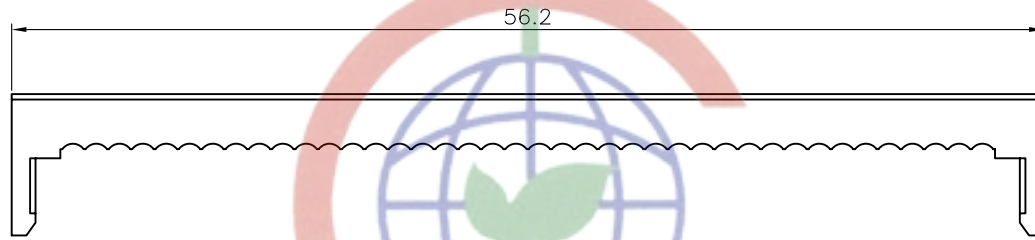

NOTES:


- MATERIAL
  - INSULATOR:THERMOPLASTIC(UL 94V-0).
  - CONTACT: COPPER ALLOY.
- SPECIFICATION
  - TEMPERATURE RANGE:-45~+110°C.
  - CONTACT RESISTANCE:30mΩ max.
  - INSULATION RESISTANCE:1000MΩ min.
  - DIELECTRIC WITHSTANDING VOLTAGE:AC 500V PER MINUTE.
- PRODUCT NUMBER CODE:

DS1018-03- X X X



- CONTACT PLATING
- 8: FULL GOLD FLASH
- 6: TIN
- 2: NICKEL+GOLD FLASH

Housing Color  
B: Black

No. OF CONTACTS  
40



COVER

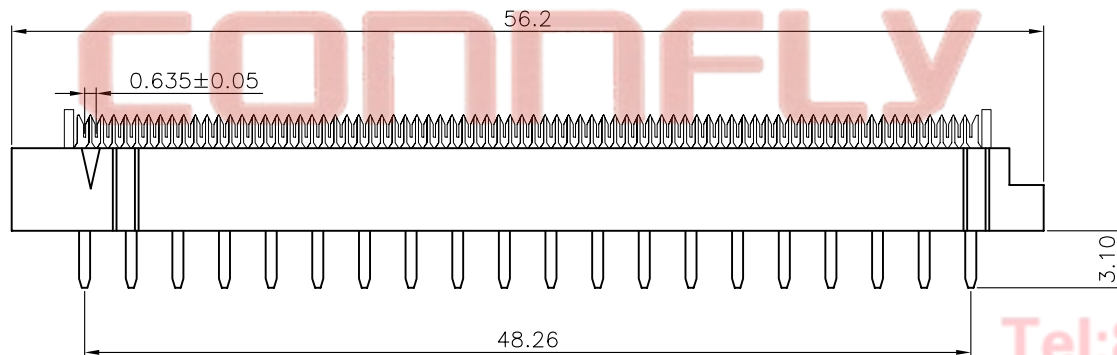

HOUSING

Tel:86-574-63508787

Fax:86-574-63510817

E-mail:sale@zhenqin.com.cn

Http://www.connfly.com

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°	mm	ATA DIP CONNECTOR PITCH 2.54mm
.X	±0.38	.X	±3°		
.XX	±0.25	.XX	±2°		
DRAWING TYPE		CUSTOMER		SHEET SIZE	SERIES
SCALE		1:1		A4	DS1018-03 SERIES
DRAWING NO.		C-DS1018-03-XXX			



農翔电子有限公司

CONNFLY CONNFLY ELECTRONIC CO. LTD