
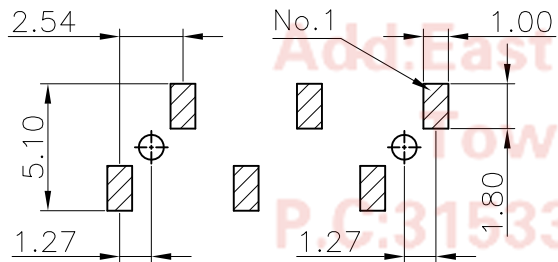
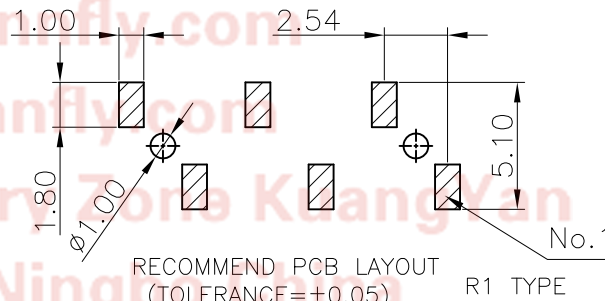
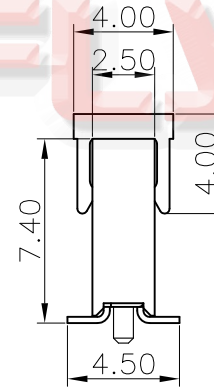
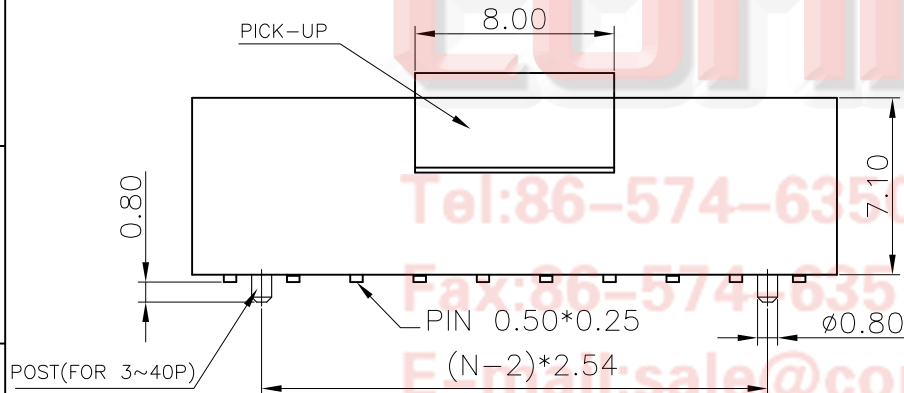
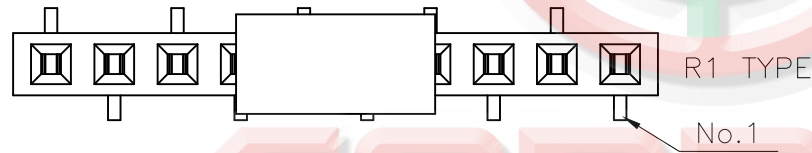


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 01/24/08'	~	

NOTES:

- MATERIAL
 - INSULATOR MATERIAL:HIGH TEMPERATURE (UL 94V-0).
 - CONTACT MATERIAL:COPPER ALLOY.
- SPECIFICATION
 - TEMPERATURE:-40° to +105°C.
 - DIELECTRIC WITHSTANDING VOLTAGE:AC 500V AC.
 - INSULATION RESISTANCE:1000MΩ min.
 - CONTACT RESISTANCE:20mΩ max.
 - CURRENT RATING:3A.
- PART NUMBER: DS1023-10
- PRODUCT NUMBER CODE:
DS1023-10 - X X X X X X X

- POST SUPPORT
 - S:W/ POST
 - X:W/O POST
- PACKING TYPE
 - T:TRAY
 - R:TAPE ON REEL
 - B:TUBE
- PICK UP SUPPORT
 - S: W/
 - X: W/O
- BEND TYPE
 - 1: R1 TYPE
 - 2: R2 TYPE
- CONTACT PLATING
 - 8: FULL GLOD FLASH
 - 0: SELECTIVE GLOD FLASH
- HOUSING COLOR
 - B: BLACK
- No.of Contacts
 - 1*1 - 1*40

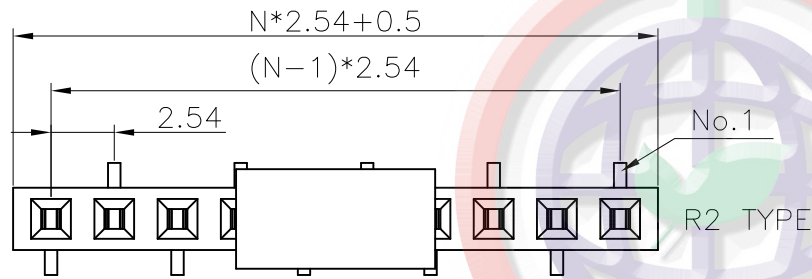

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	FEMALE HEADER PITCH	
X.	±0.60	X.	±5°		mm	2.54mm SMT TYPE H=7.1mm	
.X	±0.38	.X	±3°			SHEET SIZE	A4
.XX	±0.25	.XX	±2°			SERIES	DS1023-10 SERIES
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
SCALE		1:1					
DRAWING NO.		C-DS1023-10-XXXXX					