


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 09/11/15'	~	

N:NUMBER OF CONTACTS

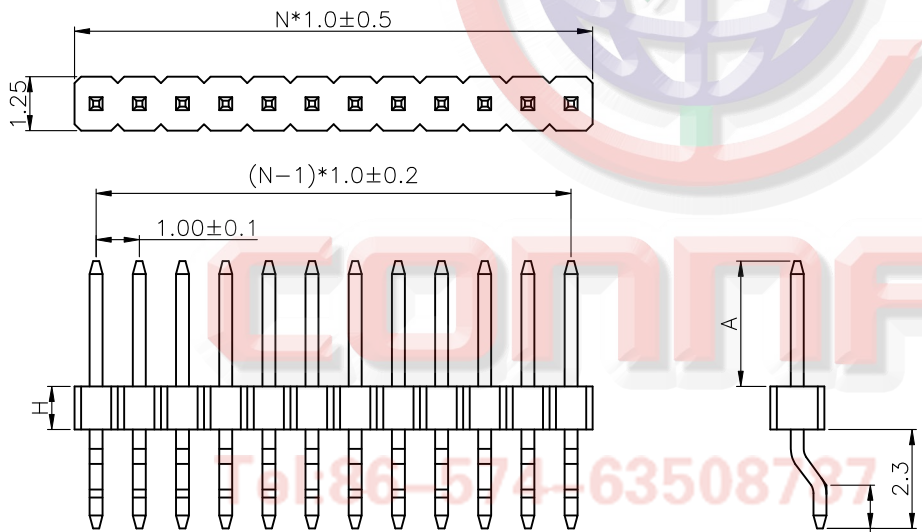

NOTES:

- MATERIAL
  - INSULATOR:THERMOPLASTIC(UL 94V-0).
  - CONTACT MATERIAL:COPPER ALLOY.
- SPECIFICATION
  - CURRENT RATING:0.8 Amp.
  - INSULATION RESISTANCE:500M $\Omega$  Min.
  - DIELECTRIC WITHSTANDING:300VAC.
  - CONTACT RESISTANCE:20m $\Omega$  Max.
  - OPERATING TEMPERATURE:-40°C TO+105°C.

3. PART NUMBER: DS1031-41


4. PRODUCT NUMBER CODE:

DS1031-41 - X X X X X X X X

- PACKING TYPE  
B: TUBE  
R: TAPE ON REEL
- DIM.A B TYPE  
1: TYPE 1  
2: TYPE 2  
.....
- MOUNTING TYPE  
S: SMT TYPE
- HOUSING HEIGHT  
1:1.00
- HOUSING COLOR  
B:BLACK
- CONTACT PLATING  
8: FULL GOLD FLASH
- CONNECTOR TYPE  
P:PLUG
- No.OF CONTACTS  
1\*2-1\*50

TYPE	DIM A
1	1.0


Tel:86-574-63508787  
 Fax:86-574-63510817  
 E-mail:sale@connfly.com  
 http://www.connfly.com

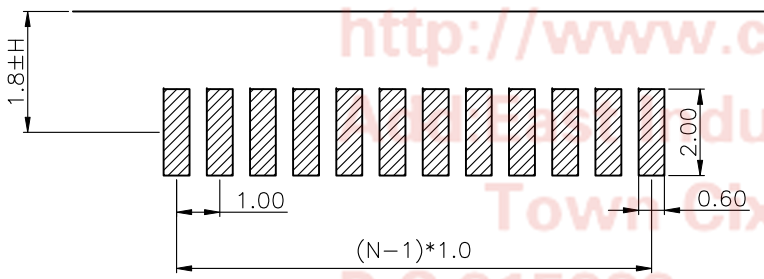

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	$\pm 0.60$	X.	$\pm 5^\circ$
.X	$\pm 0.38$	.X	$\pm 3^\circ$
.XX	$\pm 0.25$	.XX	$\pm 2^\circ$

PROJECTION	TITLE	SINGLE ROW PIN HEADER PITCH	
UNITS	mm	1.00mm R/A-SMT TYPE	
SHEET SIZE	A4	SERIES	DS1031-41 SERIES

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1031-41-XXXXXX-A		

 **晨翔电子有限公司**  
**CONNFLY CONNFLY ELECTRONIC CO. LTD**