



## UTRS3227

Preliminary

CMOS IC

### **+3.0V TO +5.5V POWER SUPPLY, 1MBPS, RS-232 LINE DRIVER/RECEIVER**

#### ■ DESCRIPTION

The UTC **UTRS3227** consists of 1 driver and 1 receiver. It meets EIA/TIA-232 and V.28/V.24 specifications, it intended for notebook computer applications. A high-efficiency, dual charge-pumps power supply and a low-dropout transmitter combine to deliver true RS-232 performance from a single +3.0V~+5.5V power supply. A guaranteed data rate of 1Mbps for high speed applications such as communicating with ISDN modems.

The UTC **UTRS3227** achieves 1µA supply current in shutdown condition. The UTC **UTRS3227** automatically enter a low-power shutdown mode when the RS-232 cable is disconnected or the transmitters of the connected peripherals are inactive, and the UART driving the transmitter inputs is inactive for more than 30 seconds. The UTC **UTRS3227** turn on again when they sense a valid transition at any transmitter or receiver input.

The UTC **UTRS3227** requires only 0.1µF capacitors in 3.3V operation, and can operate from input voltages ranging from +3.0V ~+5.5V. it is ideal for 3.3V-only systems, 5.0V-only systems, or mixed 3.3V and 5.0V systems that require true RS-232 performance.


#### ■ FEATURES

- \* Operates With 3.0V to 5.5V Power Supply
- \* One Driver and one Receiver
- \* Operates Up To 1Mbps
- \* Designed to Transmit at a Data Rate of 1Mbps
- \* Low Standby Current (1µA Typical)
- \* External Capacitors (4×0.1µF)
- \* Accepts 5.0V Logic Input With 3.3V Supply
- \* Serial-Mouse Drivability
- \* Exceeds ±8KV ESD Protection(HBM) for RS-232 I/O Pins


#### ■ ORDERING INFORMATION

Ordering Number		Package	Packing
Lead Free	Halogen Free		
UTRS3227L-R16-R	UTRS3227G-R16-R	SSOP-16	Tape Reel


<p>UTRS3227G-R16-R</p> <p>(1)Packing Type (2)Package Type (3)Green Package</p>	<p>(1) R: Tape Reel (2) R16: SSOP-16 (3) G: Halogen Free and Lead Free, L: Lead Free</p>
--	--

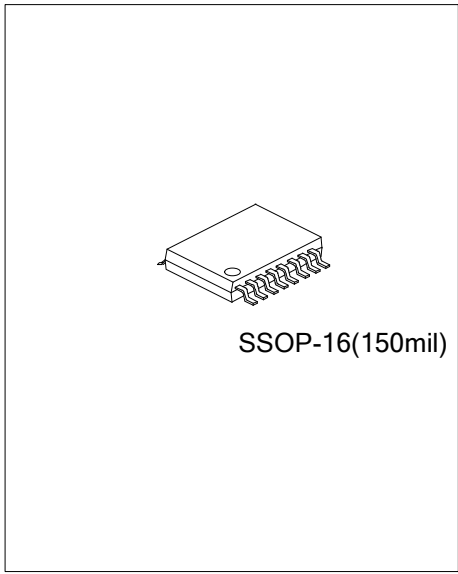

### MARKING

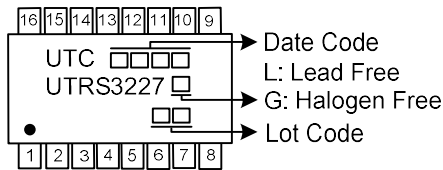


### PIN CONFIGURATION

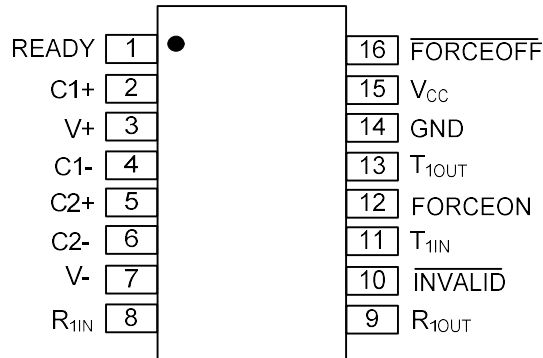

### PIN DESCRIPTION

PIN NO.	PIN NAME	DESCRIPTION
1	READY	Ready to Transmit Output, Active High. READY is enabled high when V- goes below -4V and the device is ready to transmit.
2	C1+	Positive terminal of the voltage doubler charge-pump capacitor.
3	V+	+5.5V generated by the charge pump.
4	C1-	Negative terminal of the voltage doubler charge-pump capacitor.
5	C2+	Positive terminal of inverting charge-pump capacitor.
6	C2-	Negative terminal of inverting charge-pump capacitor.
7	V-	-5.5V generated by the charge pump.
8	R <sub>1IN</sub>	RS-232 Receiver Input.
9	R <sub>1OUT</sub>	TTL/CMOS Receiver Output.
10	INVALID	Output of the valid signal detector. Indicates if a valid RS-232 level is present on receiver inputs logic "1".
11	T <sub>1IN</sub>	TTL/CMOS Transmitter Input.
12	FORCEON	Drive high to override automatic circuitry keeping transmitters on ( $\overline{\text{FORCEOFF}}$ must be high) (Table 2).
13	T <sub>1OUT</sub>	RS-232 Transmitter Output.
14	GND	Ground.
15	V <sub>CC</sub>	+3.0V ~ +5.5V Supply Voltage.
16	$\overline{\text{FORCEOFF}}$	Drive low to shut down transmitters and on-board power supply. This over-rides all automatic circuitry and FORCEON (Table 2).

■ BLOCK DIAGRAM

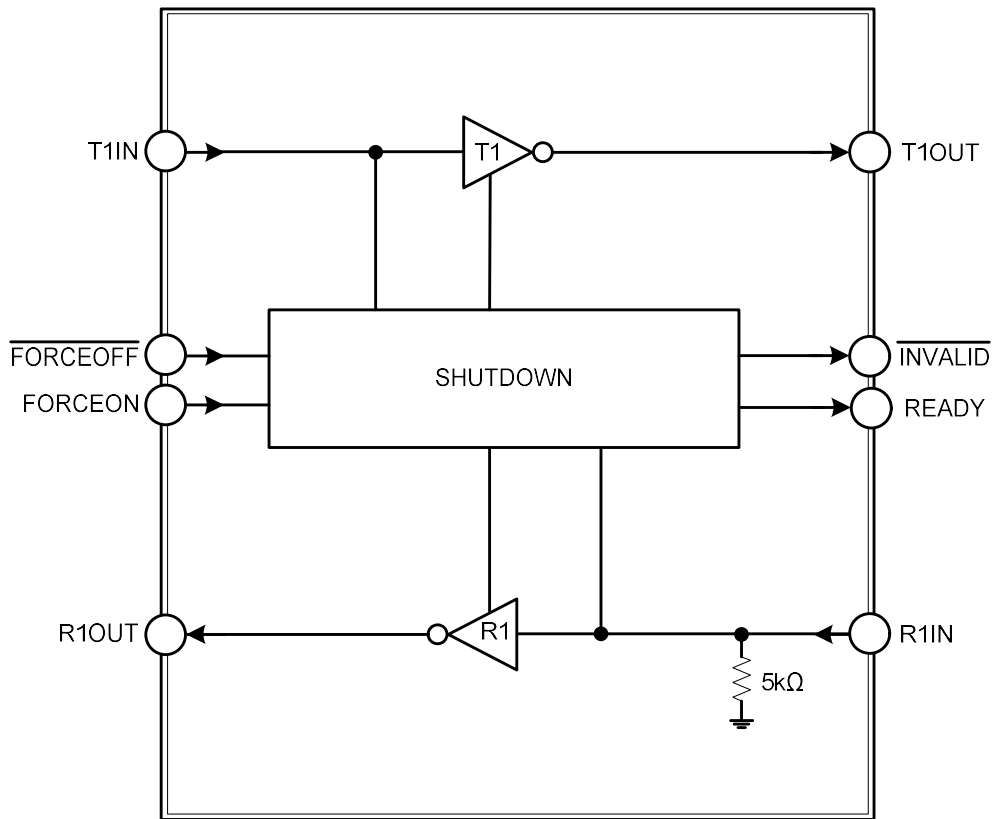

■ ABSOLUTE MAXIMUM RATING

PARAMETER		SYMBOL	RATINGS	UNIT
V <sub>CC</sub>		V <sub>CC</sub>	+6.0	V
V+ (Note 2)		V+	+7.0	V
V- (Note 2)		V-	-7.0	V
V+ + V-  (Note 2)		V <sub>PUMP</sub>	+13.0	V
Input Voltages	T1IN, FORCEOFF, FORCEON	V <sub>IN</sub>	+6.0	V
	R1IN		±25	V
Output Voltages	T1OUT	V <sub>OUT</sub>	±13.2	V
	R1OUT, INVALID, READY		V <sub>CC</sub>	V
Short-Circuit Duration	T1OUT	SC	Continuous	
Power Dissipation(T <sub>A</sub> =25°C)		P <sub>D</sub>	870	mW
Operating Temperature		T <sub>OPR</sub>	-40 ~ +85	°C
Storage Temperature		T <sub>STG</sub>	-65 ~ +150	°C

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.  
 2. V+ and V- can have maximum magnitudes of 7.0V, but their absolute difference cannot exceed 13.0V.

■ ELECTRICAL CHARACTERISTICS

(V<sub>CC</sub>=+3.0V~+5.5V, C1~C4=0.1µF (Note 2), T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise specified)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>DC CHARACTERISTICS</b>							
Supply Current, Shutdown		I <sub>SHDN</sub>	V <sub>CC</sub> =3.3V or 5.0V, T <sub>A</sub> = 25°C	All R <sub>IN</sub> open, FORCEOFF =V <sub>CC</sub> , FORCEON=GND	1.0	10	µA
				FORCEOFF =GND, All R <sub>IN</sub> =GND	1.0	10	µA
Supply Current, Shutdown Disabled		I <sub>CC</sub>		FORCEON= FORCEOFF =V <sub>CC</sub> , no load	0.3	2.0	mA
<b>LOGIC INPUTS</b>							
Input Logic Threshold	Low	V <sub>LGL</sub>	T1IN, FORCEON, FORCEOFF			0.8	V
	High	V <sub>LGH</sub>	T1IN, FORCEON, FORCEOFF	V <sub>CC</sub> = 3.3V	2.0		V
				V <sub>CC</sub> = 5.0V	2.4		V
Input Leakage Current		I <sub>IN(LK)</sub>	T1IN, FORCEON, FORCEOFF		±0.01	±1.0	µA
<b>RECEIVER OUTPUTS</b>							
Output Leakage Current		I <sub>ROUT(LK)</sub>	Receivers disabled		±0.05	±10	µA
Output Voltage	Low	V <sub>ROU<sub>T</sub>L</sub>	I <sub>OUT</sub> = 1.6mA			0.4	V
	High	V <sub>ROU<sub>T</sub>H</sub>	I <sub>OUT</sub> = -1.0mA	V <sub>CC</sub> - 0.6	V <sub>CC</sub> - 0.1		V
<b>AUTOSHUTDOWN (FORCEON=GND, FORCEOFF =V<sub>CC</sub>)</b>							
Receiver Input Thresholds to Transmitters	Enabled	V <sub>R(EN)</sub>	Fig.1	Positive threshold		2.7	V
				Negative threshold	-2.7		
	Disabled	V <sub>R(DIS)</sub>	1µA supply current, Fig.1		-0.3	0.3	V
INVALID, READY Output Voltage	Low	V <sub>INVL</sub>	I <sub>OUT</sub> =1.6mA			0.4	V
	High	V <sub>INVH</sub>	I <sub>OUT</sub> =-1.0mA	V <sub>CC</sub> - 0.6			V
Receiver or Transmitter Edge to Transmitters Enabled		t <sub>WU</sub>	Fig.2		100		µs
Receiver or Transmitter Edge to Transmitters Shutdown		t <sub>AUTOSH<sub>DN</sub></sub>	Fig.2	15	30	60	s

### ■ ELECTRICAL CHARACTERISTICS (Cont.)

( $V_{CC}=+3.0V\sim+5.5V$ ,  $C1\sim C4=0.1\mu F$  (Note 2),  $T_A = T_{MIN}$  to  $T_{MAX}$ , Unless Otherwise Specified)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT	
Receiver Positive or Negative Threshold to INVALID	High	$t_{INVH}$	Fig.2		1.0		$\mu s$	
	Low	$t_{INVL}$			30		$\mu s$	
<b>RECEIVER INPUTS</b>								
Input Voltage Range		$V_{RR}$		-25		25	V	
Input Threshold Low		$V_{RINL}$	$T_A=25^\circ C$	$V_{CC}=3.3V$	0.6	1.2	V	
				$V_{CC}=5.0V$	0.8	1.5		
Input Threshold High		$V_{RINH}$	$T_A=25^\circ C$	$V_{CC}=3.3V$		1.5	2.4	V
				$V_{CC}=5.0V$		1.8	2.4	
Input Hysteresis		$V_{RINHYS}$			0.5		V	
Input Resistance		$V_{RINRES}$	$T_A=25^\circ C$	3	5	7	k $\Omega$	
<b>TRANSMITTER OUTPUTS</b>								
Output Voltage Swing		$V_{TOUTSW}$	All transmitter outputs loaded with 3k $\Omega$ to ground	$\pm 5.0$	$\pm 5.4$		V	
Output Resistance		$V_{TOUTRES}$	$V_{CC}=V+=V-=0V$ , Transmitter output= $\pm 2V$	300	10M		$\Omega$	
Output Short-Circuit Current		$I_{TSC}$			$\pm 35$	$\pm 60$	mA	
Output Leakage Current		$I_{TOUT(LK)}$	$V_{CC}=0$ or $3.0V\sim 5.0V$ , $V_{OUT}=\pm 12V$ , Transmitters disabled			$\pm 25$	$\mu A$	
<b>TIMING CHARACTERISTICS</b>								
Maximum Data Rate		DR	$R_L=3k\Omega$ , $C_L=1000pF$ , one transmitter switching	250			kbps	
			$V_{CC}=3.0V$ to $4.5V$ , $R_L=3k\Omega$ , $C_L=250pF$ , one transmitter switching	1000			kbps	
			$V_{CC}=4.5V$ to $5.5V$ , $R_L=3k\Omega$ , $C_L=250pF$ , one transmitter switching	1000			kbps	
Receiver Propagation Delay		$t_{PHL}$	Receiver input to receiver output, $C_L=150pF$		0.15		$\mu s$	
		$t_{PLH}$			0.15			
Receiver Output Time		Enable	Normal operation		200		ns	
		Disable			200			
Transmitter Skew		$t_{TS}$	$ t_{PHL} - t_{PLH} $		25		ns	
Receiver Skew		$t_{RS}$	$ t_{PHL} - t_{PLH} $		50		ns	
Transition-Region Slew Rate		SR	$V_{CC}=3.3V$ , $T_A=25^\circ C$ , $R_L=3k\Omega\sim 7k\Omega$ , measured from $+3V$ $\sim -3V$ or $-3V\sim +3V$	$C_L=150pF\sim 1000pF$	10	150	V/ $\mu s$	

Notes: 1. Typical values are at  $T_A=25^\circ C$ .

2.  $C1\sim C4=0.1\mu F$ , measured at  $3.3V\pm 10\%$ .  $C1=0.047\mu F$ ,  $C2\sim C4=0.33\mu F$ , measured at  $5.0V\pm 10\%$ .

### ■ DETAILED DESCRIPTION

#### Charge-Pump Voltage Converter

The UTC **UTRS3227** consists of a regulated dual charge pumps that provide output voltages of +5.5V and -5.5V, regardless of the input voltage ( $V_{CC}$ ) changing from +3.0V to +5.5V.

The charge pumps operate in a discontinuous mode: if the output voltages are less than 5.5V, the charge pumps are enabled; if the output voltages exceed 5.5V, the charge pumps are disabled.

Each charge pump requires a flying capacitor (C1, C2) and a reservoir capacitor (C3, C4) to generate the V+ and V- supplies, refer to application circuit.

#### RS-232 Transmitter

UTC **UTRS3227**'s transmitter is inverting level translators that convert CMOS-logic levels to 5.0V EIA/TIA-232 levels. They guarantee a 1Mbps data rate with worst-case loads of 3k $\Omega$  in parallel with 1000pF, providing compatibility with PC-to-PC communication software.

Transmitter can be paralleled to drive multiple receivers or mouse. When  $\overline{\text{FORCEOFF}}$  is driven to ground, or shutdown circuitry senses invalid voltage levels at receiver input, the transmitter is disabled and the output are forced into a high-impedance state.

#### RS-232 Receiver

The UTC **UTRS3227**'s receiver convert RS-232 signals to CMOS-logic output levels. The receiver has one inverting three-state output. In shutdown or in autosutdown, the **UTRS3227**'s receiver is active.

The UTC **UTRS3227** features an  $\overline{\text{INVALID}}$  output that is enabled low when no valid RS-232 voltage levels have been detected on receiver input. Because  $\overline{\text{INVALID}}$  indicates the receiver input's condition, it is independent of FORCEON and FORCEOFF states

Table 1.  $\overline{\text{INVALID}}$  Control Truth Table

RS-232 SIGNAL PRESENT AT RECEIVER INPUT	$\overline{\text{INVALID}}$ OUTPUT
YES	High
NO	Low

#### Shutdown Function

A 1 $\mu$ A supply current is achieved with shutdown feature, which operates when FORCEON is low and  $\overline{\text{FORCEOFF}}$  is high. When the UTC **UTRS3227** do not sense a valid signal transition on any receiver and transmitter input for 30sec, the on-board charge pumps are shutdown, reducing supply current to 1 $\mu$ A. This occurs if the RS-232 cable is disconnected or the connected peripheral transmitters are turned off. The system turns on again when a valid transition is applied to any RS-232 receiver or transmitter input (Table 2). As a result, the system saves power without changes to the existing BIOS or operating system.  $\overline{\text{INVALID}}$  indicates the receiver inputs' condition, when using shutdown function, the  $\overline{\text{INVALID}}$  output is high when the device is on and low when the device is shut down.

Table 2. Shutdown Logic Control Truth Table

OPERATION STATUS	$\overline{\text{FORCEOFF}}$ INPUT	FORCEON INPUT	Valid signal at Transmitter or Receiver	T1OUT
Normal Operation (AutoShutdown Disable)	H	H	X	Active
Normal Operation (AutoShutdown)	H	L	YES	Active
Normal Operation (AutoShutdown)	H	L	NO	High-Z
Shutdown	L	X	X	High-Z

■ DETAILED DESCRIPTION (Cont.)

Figure 1 depicts valid and invalid RS-232 receiver voltage levels. INVALID indicates the receiver input's condition, and is independent of FORCEON and FORCEOFF states.

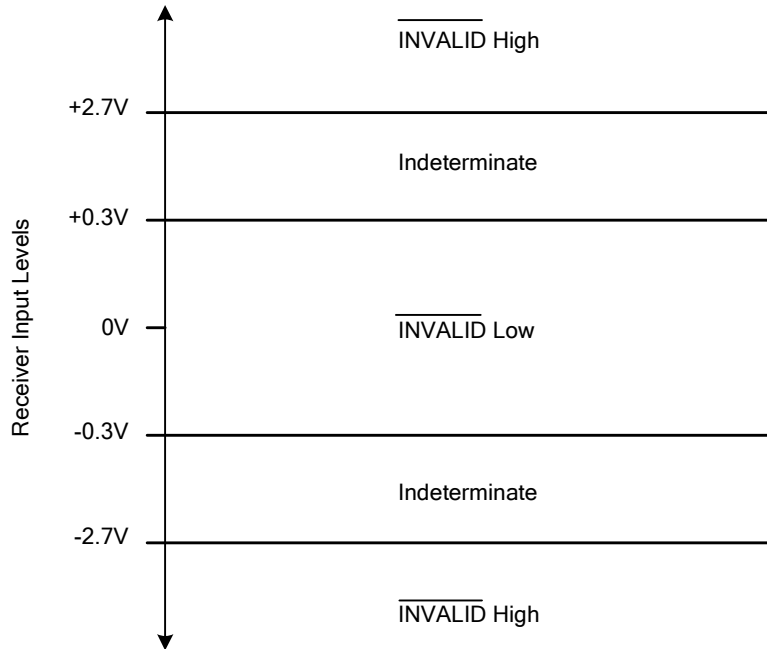


Fig.1 Shutdown Input Levels

When shutdown, the UTC UTRS3227's charge pumps are turned off, V+ decays to V<sub>CC</sub>, V- decays to ground, the transmitter output is disabled (high impedance). The time required to exit shutdown is typically 100µs.

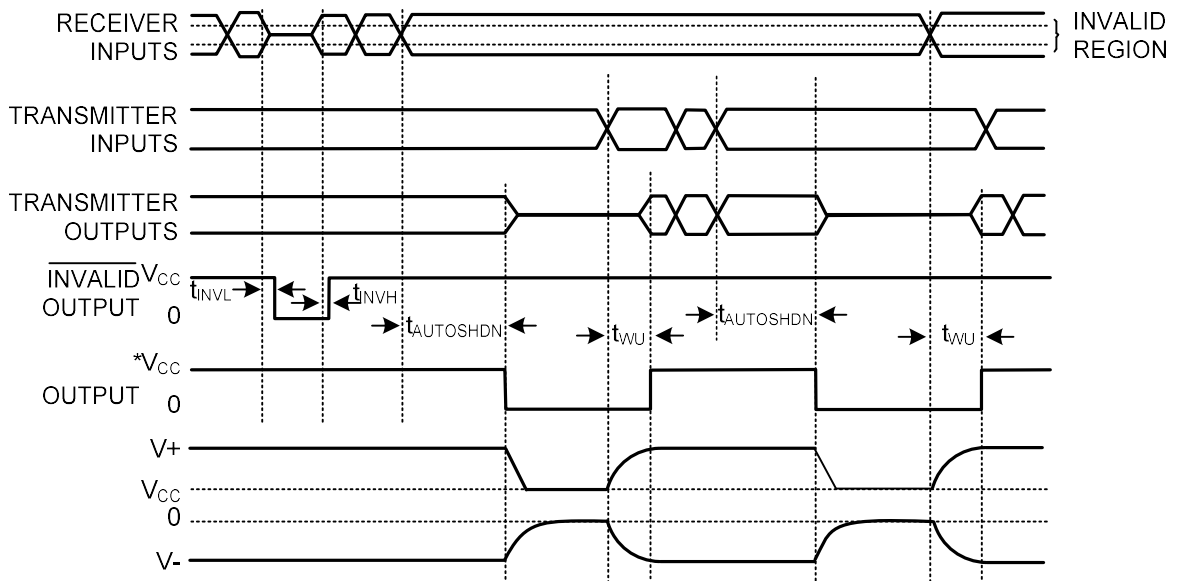


Fig.2 Shutdown Input Timing

■ TYPICAL APPLICATION CIRCUIT

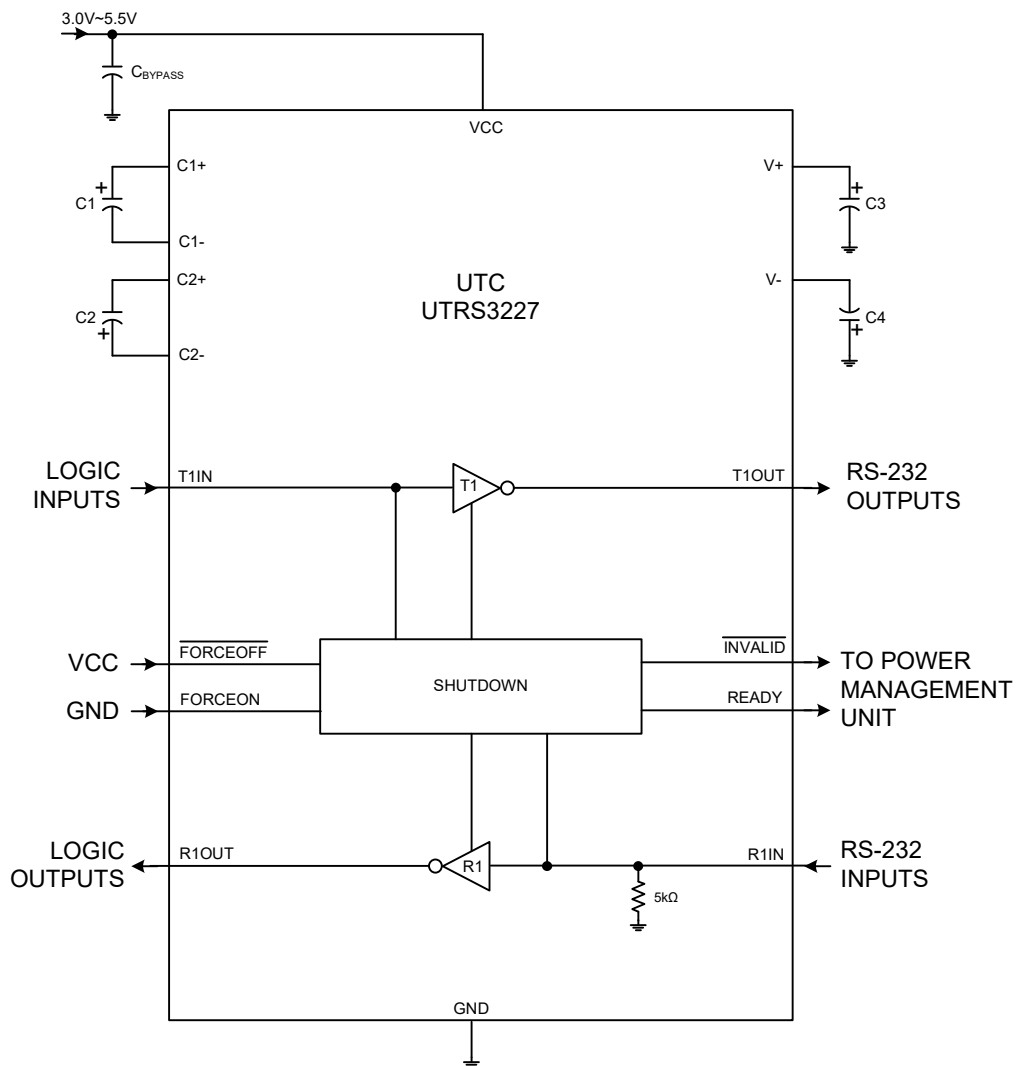


Fig.3 Application Circuit

Table 3. Required Capacitor Value

V <sub>CC</sub> (V)	C1 (μF)	C2, C3, C4 (μF)	C <sub>BYPASS</sub> (μF)
3.0 ~ 3.6	0.22	0.22	0.22
3.15 ~ 3.6	0.1	0.1	0.1
4.5 ~ 5.5	0.047	0.33	0.047
3.0 ~ 5.5	0.22	1.0	0.22



UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.