

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 08/14/07	~	

NOTES:



- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 30mΩ Max.INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE:500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE:1000MΩ Min.
- MECHANICAL CHARACTERISTICS:
 - DURABILITY: 300 CYCLES.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE:-40°C~+105°C.

4. PRODUCT NUMBER CODE:

DS1036-04 - XX X X X X X



- XX: RIVET TYPE
- X: P:W/ THREAD(UNC #4-40)
- X: N:W/O THREAD
- X: CONTACT PLATING
- X: Si: SELECTIVE GOLD FLASH
- X: HOUSING COLOR
- U: BLUE
- B: BLACK
- LATCH SUPPORT:
 - P:W/
 - N:W/O
- CONNECTOR TYPE
 - M: MALE
 - F: FEMALE
- No.OF CONTACTS
 - 09: 9pos
 - 15: 15pos
 - 25: 25pos
 - 37: 37pos

Position	A±0.1	B±0.2	C±0.2	D±0.2	
				Male	Female
9P	10.16	30.80	24.99	17.90	16.33
15P	17.78	39.14	33.32	26.50	24.66
25P	30.48	53.04	47.04	40.00	38.38
37P	45.72	69.32	63.50	56.50	54.84

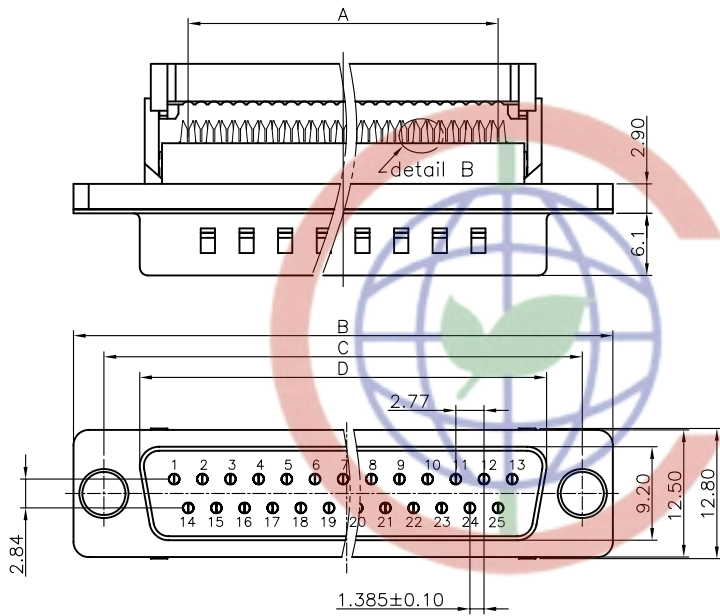


detail B
Scale 3:1

Male

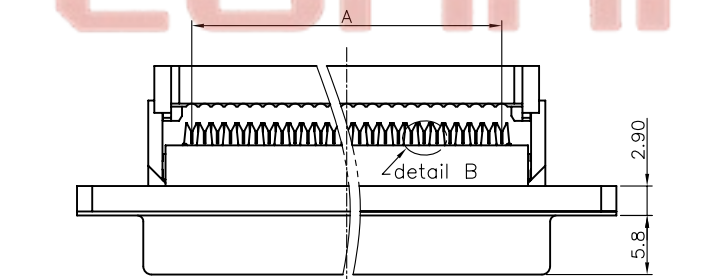

detail B
Scale 3:1


Female

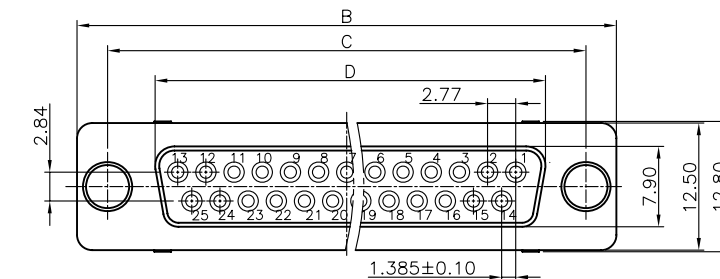

Female

Tel:86-574-635108787
 Fax:86-574-63510817
 E-mail:sale@zhenjin.com.cn
 Http://www.connfly.com
 Add:East Industry Zone KuangYan

- 9P 19.90
- 15P 28.24
- 25P 42.14
- 37P 58.42

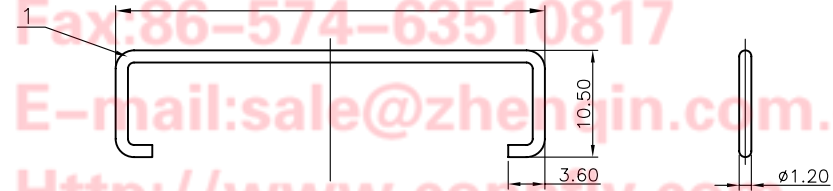

LATCH

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE
X. ±0.60	X. ±3°	mm	D-SUB IDC WITH RIVET & LATCH TYPE
.X ±0.38	.X ±2°	A4	SERIES DS1036-04 SERIES
.XX ±0.25	.XX ±1°		
DRAWING TYPE	CUSTOMER	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD	
SCALE	1:1 SHEET 1 OF 1		
DRAWING NO.	C-DS1036-04-XXXXXXX		