


| REV. | DESCRIPTION | DRAWN | CHECKED | APPROVED |
|------|----------------|---------------|---------------|---------------|
| A | NEW RELEASE | YCH 09/04/08' | ~ | LJC 09/04/08' |
| B | PACKING CHANGE | JLZ 03/23/16' | HZW 03/23/16' | LJC 03/23/16' |
| | | | | |

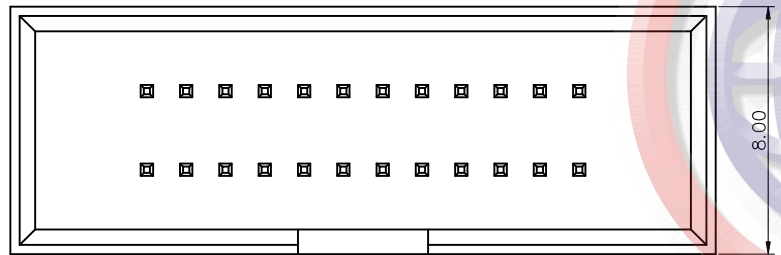


NOTES:

- MATERIAL
 - INSULATOR: THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL: COPPER ALLOY.
- SPECIFICATION
 - CURRENT RATING: 1.0 Amp.
 - INSULATION RESISTANCE: 1000MΩ Min.
 - DIELECTRIC WITHSTANDING: 300VAC.
 - CONTACT RESISTANCE: 20mΩ Max.
 - OPERATING TEMPERATURE: -40°C TO+105°C.


3. PART NUMBER: DS1064-16

4. PRODUCT NUMBER CODE:

DS1064-16 - X X X X - X

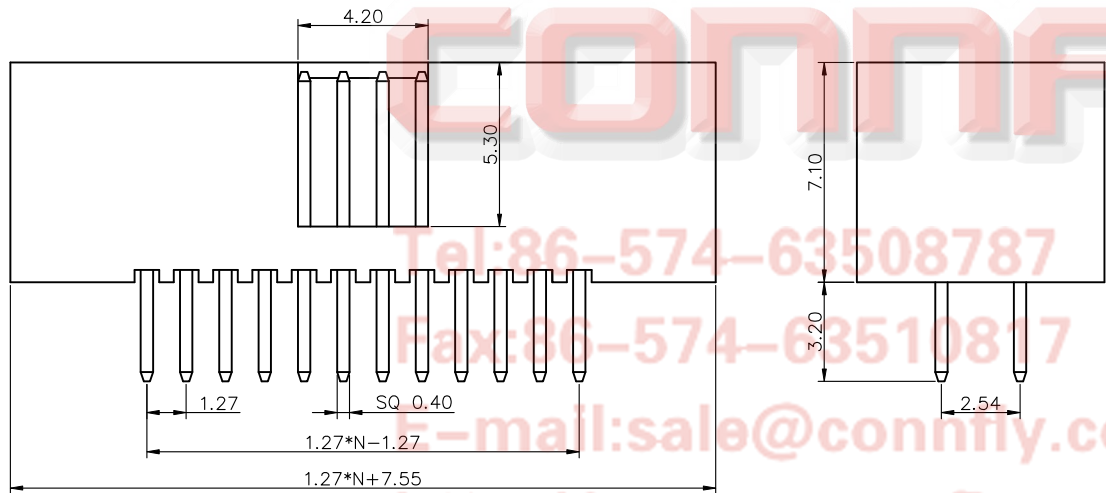

- PLATING LEVEL
3A: 3A LEVEL
- PACKING TYPE
T: TRAY
B: TUBE
- HOUSING COLOR
B: BLACK
- CONTACT PLATING
8: FULL GOLD FLASH
6: FULL TIN
- MOUNTING TYPE
V: STRAIGHT TYPE
- No.OF CONTACTS
10 20 26 30 34
40 50 60 68 70
80 90 100

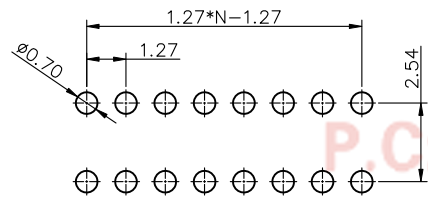

RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

Tel: 86-574-63508787
 Fax: 86-574-63510817
 E-mail: sale@connfly.com
 http://www.connfly.com
 Add: East Industry Zone KuangYan
 Town Cixi Ningbo China
 P.C: 315333

| GENERAL TOLERANCE | | ANGLE TOLERANCE | | PROJECTION | TITLE | 1.27*2.54mm BOX HEADER PITCH | |
|-------------------|-------|-----------------------|-----|--|--------|---------------------------------|--|
| X. | ±0.60 | X. | ±5° | mm | | | |
| .X | ±0.38 | .X | ±3° | A4 | SERIES | DS1064-16 SERIES | |
| .XX | ±0.25 | .XX | ±2° | | | | |
| DRAWING TYPE | | CUSTOMER | | 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD | | | |
| SCALE | | 1:1 | | | | | |
| DRAWING NO. | | C-DS1064-16-XXXXX-X-B | | | | | |