

14μA/ch, 16V Operation, Rail-to-Rail Output Dual CMOS Operational Amplifier

■GENERAL DESCRIPTION

The NJU7067 is a low power, high Voltage operation, dual CMOS Operational Amplifier. It is tolerant to RF noise. The NJU7067 can operate wide voltage range from single-supply voltage of +4V to +16V. In addition, this amplifier features Rail-to-Rail output and low input bias current (1pA typ.). Because of these features, the NJU7067 is idea for low side current sense amplifier.

■PACKAGE OUTLINE



NJU7067M
(DMP8)



NJU7067V
(SSOP8)


■FEATURES

- Low Supply Current 14μA/ch typ. (at $V_{DD}=+5V$), 16.5μA/ch typ. (at $V_{DD}=+15V$)
- Rail-to-Rail Output GND + 0.05V to $V_{DD} - 0.1V$ min. ($R_L=10k\Omega$ to 0V)
- Wide Operating Voltage $V_{opr}= 4V$ to 16V
- Input Offset Voltage $V_{IO}=4mV$ max.
- Low Input Bias Current 1pA typ.
- Slew Rate 0.04V/μs typ.
- Gain Bandwidth Product 90kHz
- Enhanced RF Noise Immunity
- Package Outline DMP8,SSOP8
- CMOS Process

■APPLICATIONS

- Battery-operated application
- Battery Monitor
- Current Sensor
- Photodiode application


■APPLICATION CIRCUIT

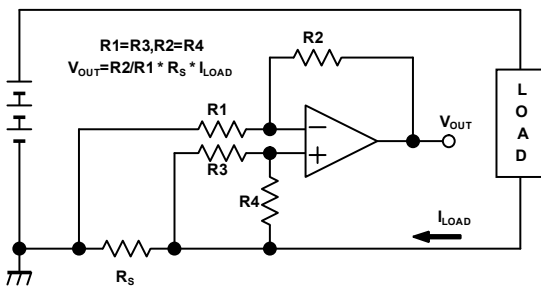

Low-side Current Sensor

■PIN CONFIGURATION

(Top View)



- PIN FUNCTION**
- 1:A OUTPUT
 - 2:A -INPUT
 - 3:A +INPUT
 - 4:VSS
 - 5:B +INPUT
 - 6:B -INPUT
 - 7:B OUTPUT
 - 8:VDD

■ABSOLUTE MAXIMUM RATINGS (Ta=25°C, unless otherwise noted.)


PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V _{DD}	+18	V
Common Mode Input Voltage Range	V _{ICM}	V _{SS} -0.3~V _{DD} +0.3	V
Differential Input Voltage Range	V _{ID}	±18 (Note 1)	V
Power Dissipation	P _D	[DMP8] 430(Note 2,3) [SSOP8] 350(Note 2,3)	mW
Operating Temperature Range	Topr	-40~+85	°C
Storage Temperature Range	Tstg	-55~+150	°C

(Note 1) For supply Voltages less than ±18V, the maximum input voltage is equal to the Supply Voltage.

(Note 2) EIA/JEDEC STANDARD Test board (76.2x114.3x1.57mm, 2layer, FR-4) mounting

(Note 3) Do not exceed "Power dissipation: PD" in which power dissipation in IC is shown by the absolute maximum rating. Refer to following Figure 1 for a permissible loss when ambient temperature (Ta) is Ta≥25°C.

Figure1. Power Dissipation Derating Curve

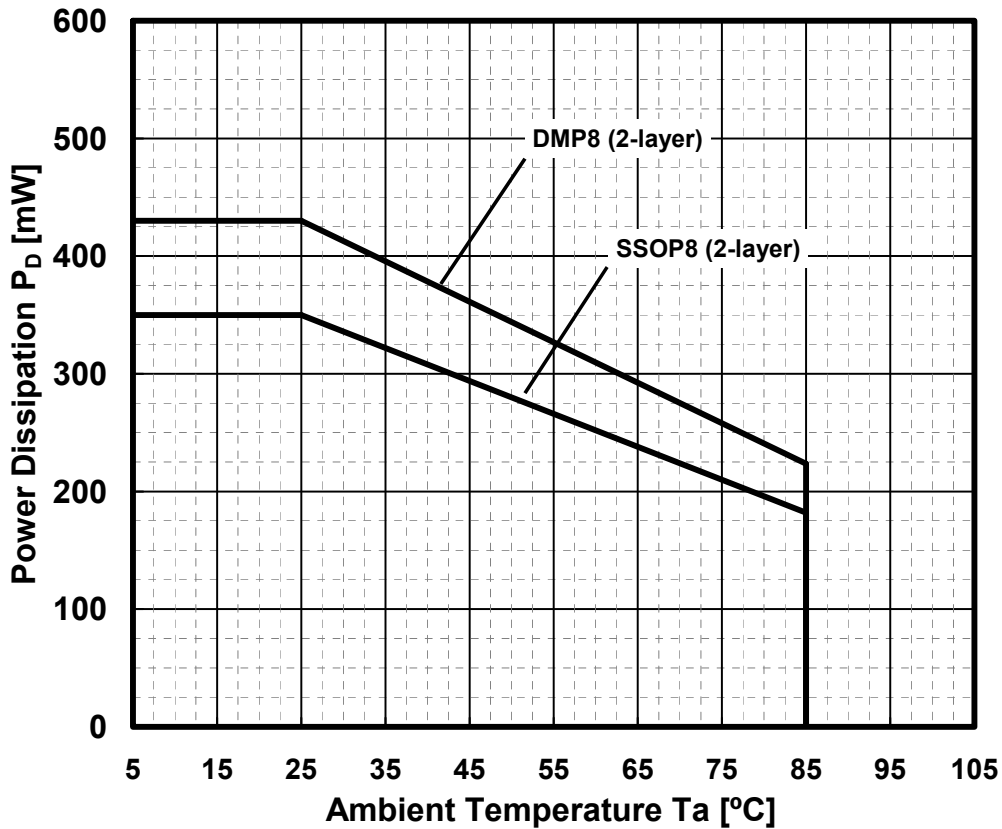

■RECOMMENDED OPERATING CONDITION

(Ta=25°C)

PARAMETER	SYMBOL	RATING	UNIT
Supply Voltage	V _{DD}	+4 to +16	V

■ ELECTRICAL CHARACTERISTICS
● DC CHARACTERISTICS

 (V_{DD}=5V, V_{SS}=0V, Ta=25°C, unless otherwise noted.)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Current	I _{DD}	No Signal	-	28	48	μA
Input Offset Voltage	V _{IO}	V _{IC} = 0V, R _S =50Ω	-	1	4	mV
Input Offset Voltage Drift	ΔV _{IO} /ΔT	Ta = -40°C to +85°C	-	3.3	-	μV/°C
Input Bias Current	I _B	V _{IC} = 0V, R _S =50Ω	-	1	-	pA
Input Offset Current	I _{IO}	V _{IC} = 0V, R _S =50Ω	-	1	-	pA
Large Signal Voltage Gain	A _V	V _O =1V to 4V, R _L =10kΩ to 2.5V	90	110	-	dB
Common Mode Rejection Ratio	CMR	V _{ICM} =0V to 3.4V	65	80	-	dB
Supply Voltage Rejection Ratio	SVR	V _{DD} =4V to 16V	70	85	-	dB
Maximum Output Voltage 1	V _{OH} 1	R _L =10kΩ to 2.5V	4.95	4.98	-	V
	V _{OL} 1		-	0.02	0.05	
Maximum Output Voltage 2	V _{OH} 2	R _L =10kΩ to 0V	4.90	4.96	-	V
	V _{OL} 2		-	0.01	0.05	
Maximum Output Voltage 3	V _{OH} 3	I _{source} = 3mA	4.65	4.75	-	V
	V _{OL} 3	I _{sink} = 3mA	-	0.20	0.30	
Common Mode Input Voltage Range	V _{ICM}	CMR≥65dB	0	-	3.4	V

● AC CHARACTERISTICS

 (V_{DD}=5V, V_{SS}=0V, Ta=25°C, unless otherwise noted.)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Gain Bandwidth Product	GBW	R _L =10kΩ to 2.5V, C _L =20pF, f=1kHz	-	60	-	kHz
Phase Margin	φ _M	R _L =10kΩ to 2.5V, C _L =20pF	-	75	-	deg
Gain Margin	G _M	R _L =10kΩ to 2.5V, C _L =20pF	-	22	-	dB
Equivalent Input Noise Voltage	V _{NI}	f=1kHz	-	45	-	nV/√Hz
Channel Separation	CS	f=1kHz	-	120	-	dB
Slew Rate	SR1	G _V =0dB, R _L =10kΩ to 2.5V, C _L =20pF, V _{in} =1Vpp (2V to 3V) (Note 4)	-	0.03	-	V/μs
	SR2	G _V =0dB, R _L =10kΩ to 0V, C _L =20pF, V _{in} =1Vpp (2V to 3V) (Note 4)	-	0.03	-	
Power Band	PBW1	G _V =+6dB, R _L =10kΩ to 2.5V, C _L =20pF, V _{in} =2.5Vpp (1.25V to 3.75V), V _o >4.8Vpp	-	3.6	-	kHz
	PBW2	G _V =+6dB, R _L =10kΩ to 0V, C _L =20pF, V _{in} =2.5Vpp (1.25V to 3.75V), V _o >4.8Vpp	-	3.2	-	
Total Harmonic Distortion	THD1	G _V =+6dB, R _L =10kΩ to 2.5V, C _L =20pF, f=100Hz, V _{out} =2Vpp	-	0.05	-	%
	THD2	G _V =+6dB, R _L =10kΩ to 0V, C _L =20pF, f=100Hz, V _{out} =2Vpp	-	0.005	-	%

(Note 4) Slew rate is defined by the lower value of the rise or fall.

■ ELECTRICAL CHARACTERISTICS
● DC CHARACTERISTICS

 (V_{DD}=10V, V_{SS}=0V, Ta=25°C, unless otherwise noted.)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Current	I _{DD}	No Signal	-	31	57	μA
Input Offset Voltage	V _{IO}	V _{IC} = 0V, R _S =50Ω	-	1	4	mV
Input Offset Voltage Drift	ΔV _{IO} /ΔT	Ta = -40°C to +85°C	-	2.7	-	μV/°C
Input Bias Current	I _B	V _{IC} = 0V, R _S =50Ω	-	1	-	pA
Input Offset Current	I _{IO}	V _{IC} = 0V, R _S =50Ω	-	1	-	pA
Large Signal Voltage Gain	A _V	V _O =2V to 8V, R _L =10kΩ to 5V	100	120	-	dB
Common Mode Rejection Ratio	CMR	V _{ICM} =0V to 8.4V	65	85	-	dB
Supply Voltage Rejection Ratio	SVR	V _{DD} =4V to 16V	70	85	-	dB
Maximum Output Voltage 1	V _{OH} 1	R _L =10kΩ to 5V	9.95	9.98	-	V
	V _{OL} 1		-	0.02	0.05	
Maximum Output Voltage 2	V _{OH} 2	R _L =10kΩ to 0V	9.90	9.95	-	V
	V _{OL} 2		-	0.01	0.05	
Maximum Output Voltage 3	V _{OH} 3	I _{source} = 3mA	9.70	9.80	-	V
	V _{OL} 3	I _{sink} = 3mA	-	0.15	0.30	
Common Mode Input Voltage Range	V _{ICM}	CMR≥65dB	0	-	8.4	V

● AC CHARACTERISTICS

 (V_{DD}=10V, V_{SS}=0V, Ta=25°C, unless otherwise noted.)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Gain Bandwidth Product	GBW	R _L =10kΩ to 5V, C _L =20pF, f=1kHz	-	80	-	kHz
Phase Margin	φ _M	R _L =10kΩ to 5V, C _L =20pF	-	75	-	deg
Gain Margin	G _M	R _L =10kΩ to 5V, C _L =20pF	-	23	-	dB
Equivalent Input Noise Voltage	V _{NI}	f=1kHz	-	45	-	nV/√Hz
Channel Separation	CS	f=1kHz	-	120	-	dB
Slew Rate	SR1	G _V =0dB, R _L =10kΩ to 5V, C _L =20pF, V _{in} =6Vpp (2V to 8V) (Note 4)	-	0.04	-	V/μs
	SR2	G _V =0dB, R _L =10kΩ to 0V, C _L =20pF, V _{in} =6Vpp (2V to 8V) (Note 4)	-	0.04	-	
Power Band	PBW1	G _V =+6dB, R _L =10kΩ to 5V, C _L =20pF, V _{in} =5Vpp (2.5V to 7.5V), V _o >9.8Vpp	-	1.6	-	kHz
	PBW2	G _V =+6dB, R _L =10kΩ to 0V, C _L =20pF, V _{in} =5Vpp (2.5V to 7.5V), V _o >9.8Vpp	-	1.6	-	
Total Harmonic Distortion	THD1	G _V =+6dB, R _L =10kΩ to 5V, C _L =20pF, f=100Hz, V _{out} =5Vpp	-	0.03	-	%
	THD2	G _V =+6dB, R _L =10kΩ to 0V, C _L =20pF, f=100Hz, V _{out} =5Vpp	-	0.003	-	%

(Note 4) Slew rate is defined by the lower value of the rise or fall.

■ ELECTRICAL CHARACTERISTICS
● DC CHARACTERISTICS

 (V_{DD}=15V, V_{SS}=0V, Ta=25°C, unless otherwise noted.)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Current	I _{DD}	No Signal	-	33	68	μA
Input Offset Voltage	V _{IO}	V _{IC} = 0V, R _S =50Ω	-	1	4	mV
Input Offset Voltage Drift	ΔV _{IO} /ΔT	Ta = -40°C to +85°C	-	2.7	-	μV/°C
Input Bias Current	I _B	V _{IC} = 0V, R _S =50Ω	-	1	-	pA
Input Offset Current	I _{IO}	V _{IC} = 0V, R _S =50Ω	-	1	-	pA
Large Signal Voltage Gain	A _V	V _O =2V to 13V, R _L =10kΩ to 7.5V	100	120	-	dB
Common Mode Rejection Ratio	CMR	V _{ICM} =0V to 13.4V	65	85	-	dB
Supply Voltage Rejection Ratio	SVR	V _{DD} =4V to 16V	70	85	-	dB
Maximum Output Voltage 1	V _{OH} 1	R _L =10kΩ to 7.5V	14.95	14.98	-	V
	V _{OL} 1		-	0.02	0.05	
Maximum Output Voltage 2	V _{OH} 2	R _L =10kΩ to 0V	14.90	14.93	-	V
	V _{OL} 2		-	0.01	0.05	
Maximum Output Voltage 3	V _{OH} 3	I _{source} = 3mA	14.70	14.85	-	V
	V _{OL} 3	I _{sink} = 3mA	-	0.15	0.30	
Common Mode Input Voltage Range	V _{ICM}	CMR≥65dB	0	-	13.4	V






● AC CHARACTERISTICS

 (V_{DD}=15V, V_{SS}=0V, Ta=25°C, unless otherwise noted.)


PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Gain Bandwidth Product	GBW	R _L =10kΩ to 7.5V, C _L =20pF, f=1kHz	-	90	-	kHz
Phase Margin	φ _M	R _L =10kΩ to 7.5V, C _L =20pF	-	75	-	deg
Gain Margin	G _M	R _L =10kΩ to 7.5V, C _L =20pF	-	23	-	dB
Equivalent Input Noise Voltage	V _{NI}	f=1kHz	-	40	-	nV/√Hz
Channel Separation	CS	f=1kHz	-	120	-	dB
Slew Rate	SR1	G _V =0dB, R _L =10kΩ to 7.5V, C _L =20pF, V _{in} =11Vpp (2V to 13V) (Note 4)	-	0.04	-	V/μs
	SR2	G _V =0dB, R _L =10kΩ to 0V, C _L =20pF, V _{in} =11Vpp (2V to 13V) (Note 4)	-	0.04	-	
Power Band	PBW1	G _V =+6dB, R _L =10kΩ to 7.5V, C _L =20pF, V _{in} =7.5Vpp (3.75V to 11.25V), V _o >14.8Vpp	-	1.1	-	kHz
	PBW2	G _V =+6dB, R _L =10kΩ to 0V, C _L =20pF, V _{in} =7.5Vpp (3.75V to 11.25V), V _o >14.8Vpp	-	0.8	-	
Total Harmonic Distortion	THD1	G _V =+6dB, R _L =10kΩ to 7.5V, C _L =20pF, f=100Hz, V _{out} =10Vpp	-	0.02	-	%
	THD2	G _V =+6dB, R _L =10kΩ to 0V, C _L =20pF, f=100Hz, V _{out} =10Vpp	-	0.003	-	%

(Note 4) Slew rate is defined by the lower value of the rise or fall.


■ TYPICAL CHARACTERISTICS

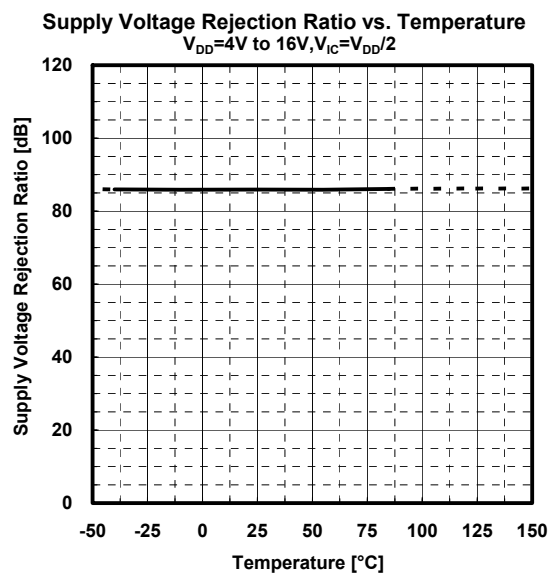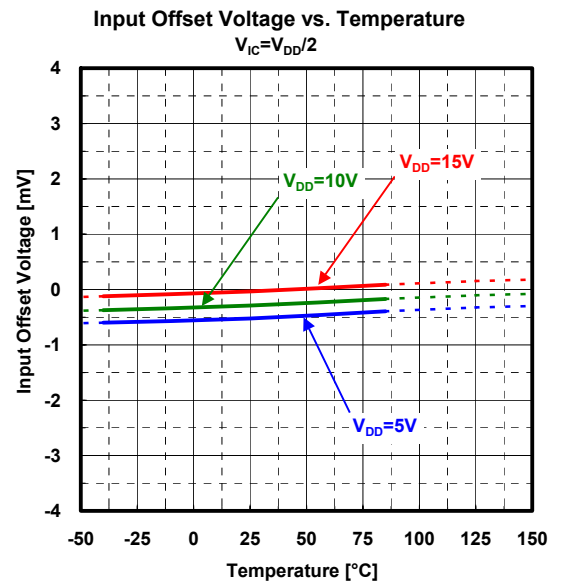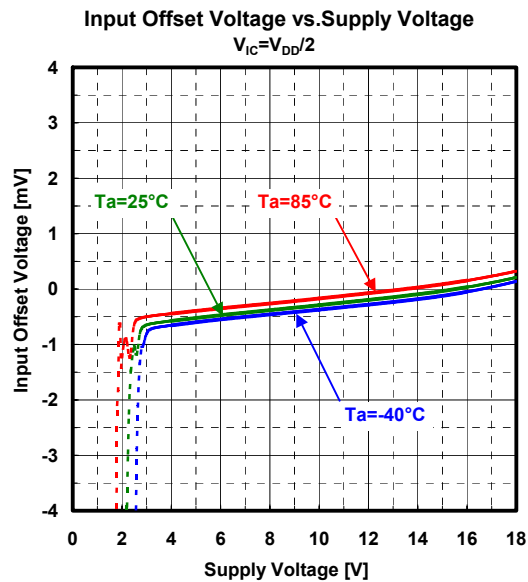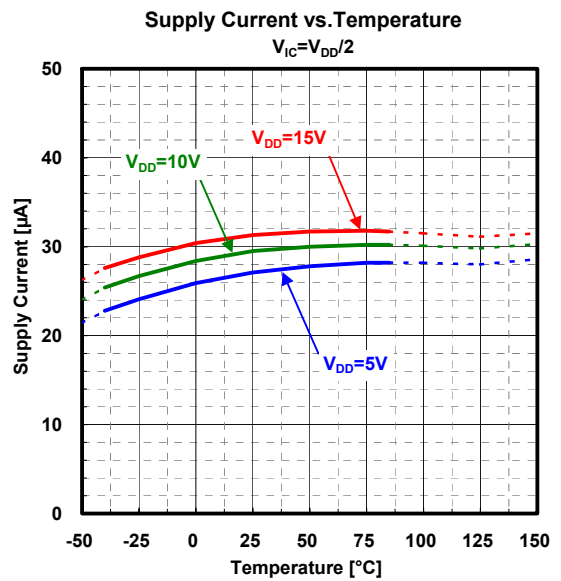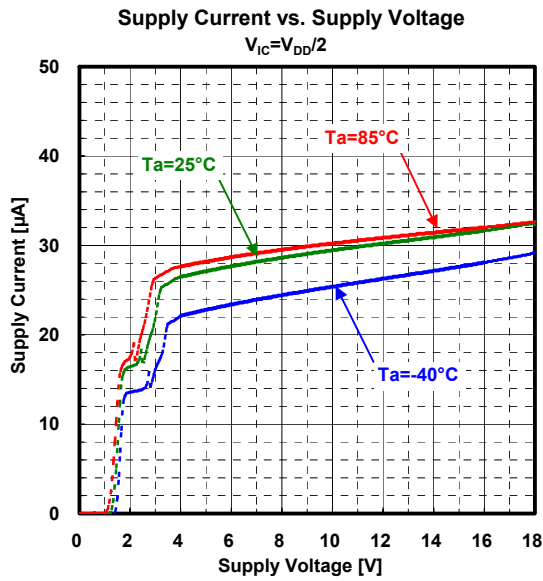


Input Offset Voltage vs. Input Common-mode Voltage

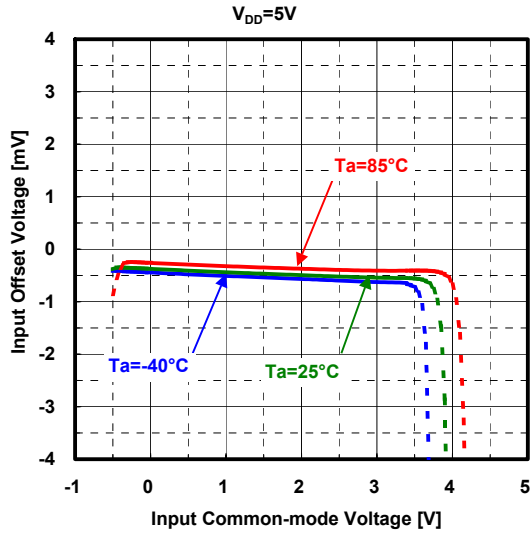


Common-mode Rejection Ratio vs. Temperature

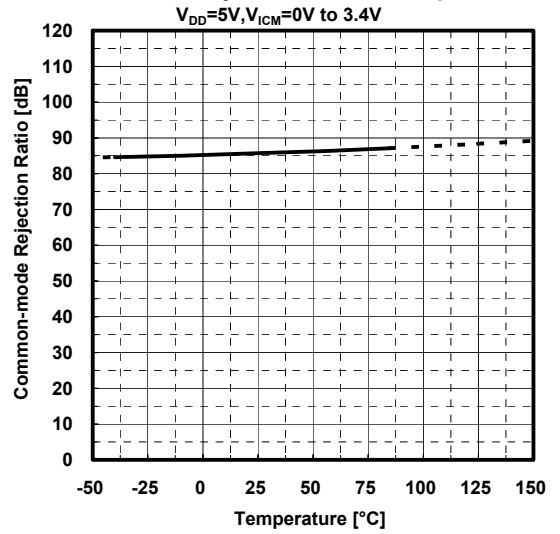


Input Offset Voltage vs. Input Common-mode Voltage

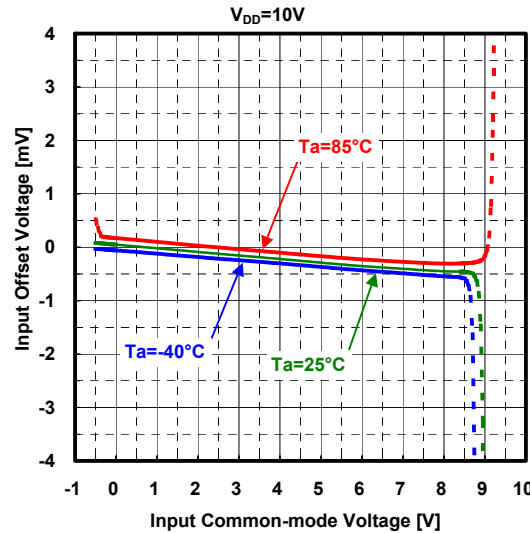


Common-mode Rejection Ratio vs. Temperature






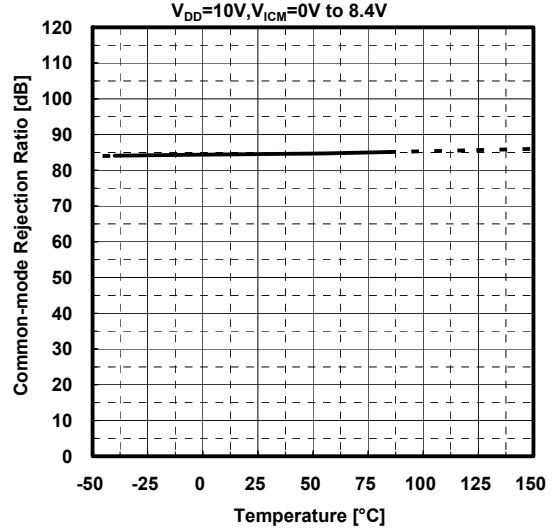








Input Offset Voltage vs. Input Common-mode Voltage






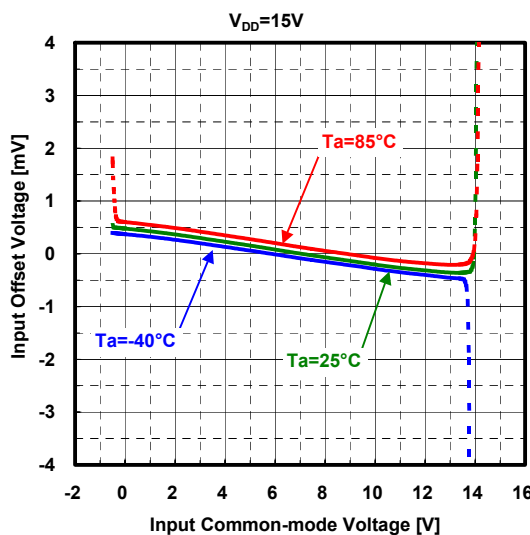


Common-mode Rejection Ratio vs. Temperature

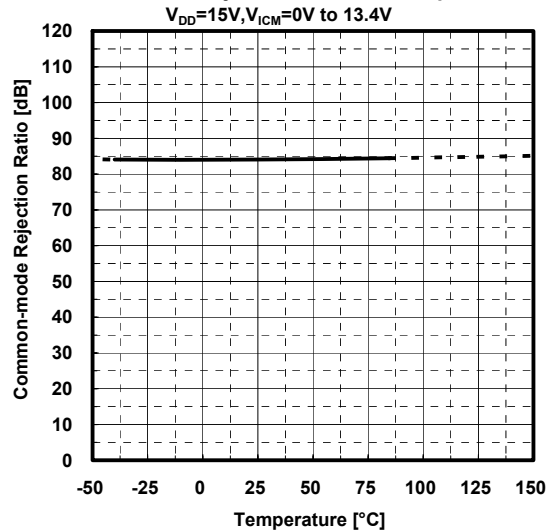

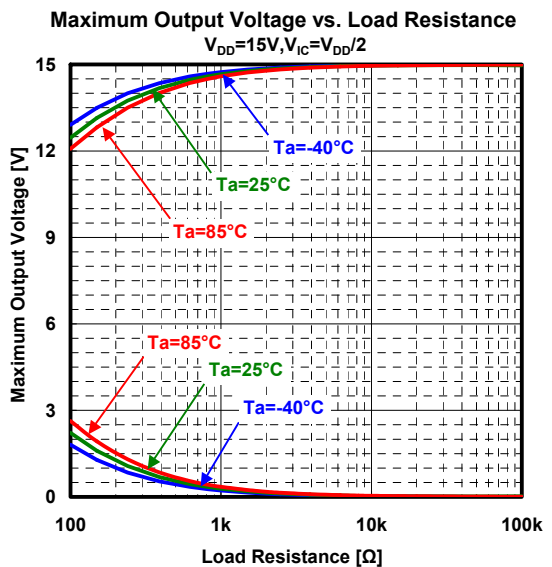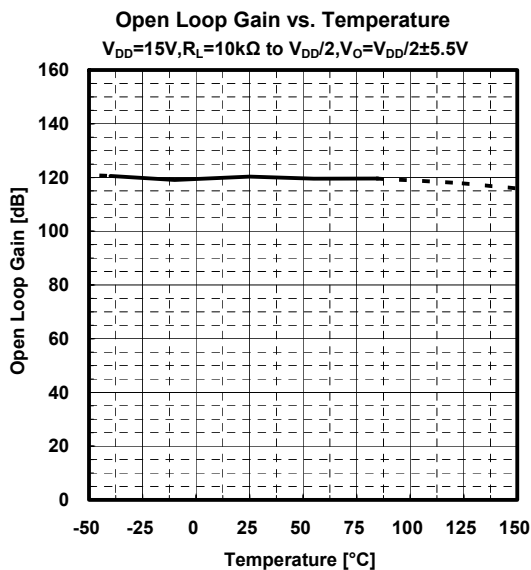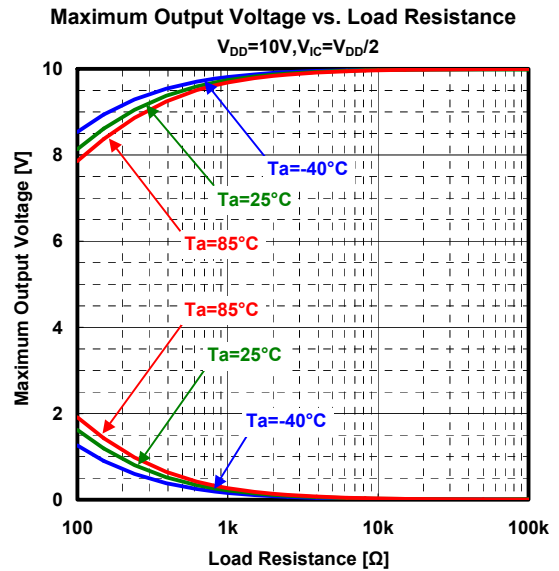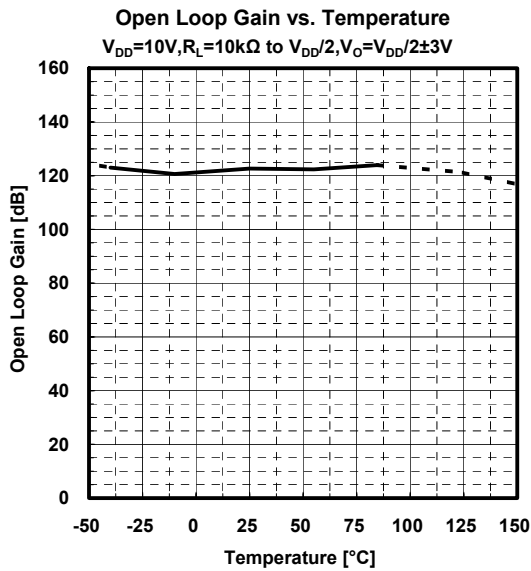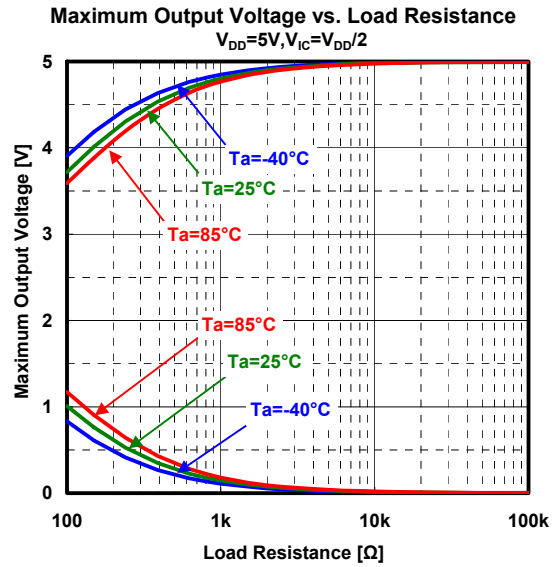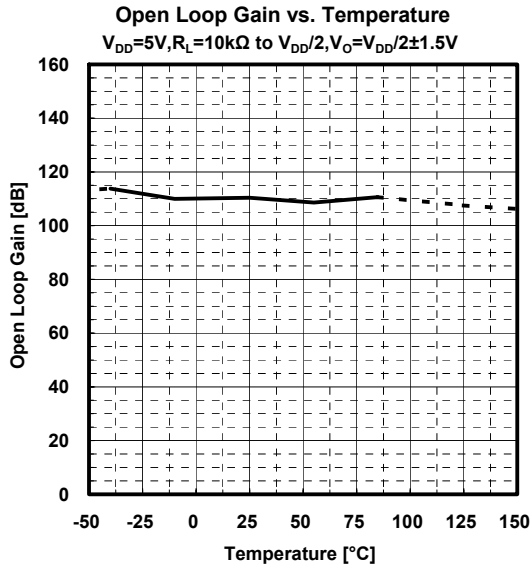


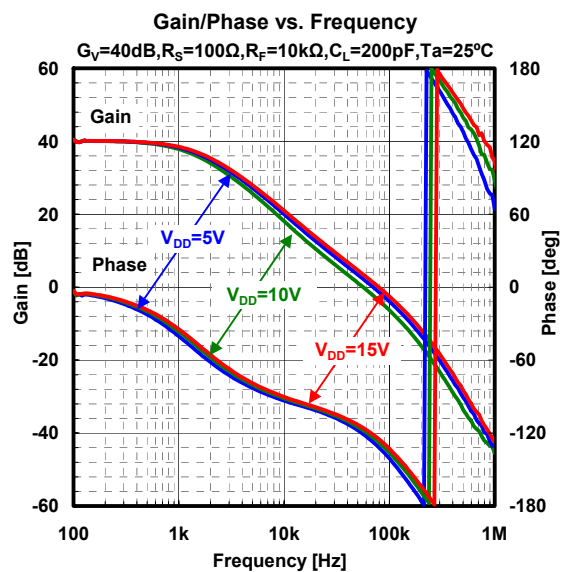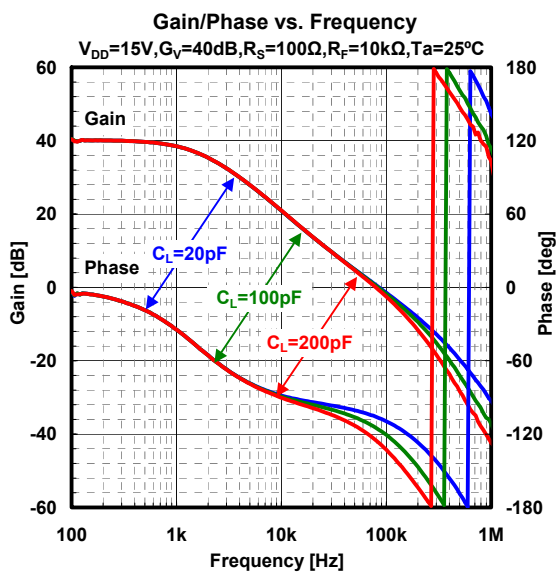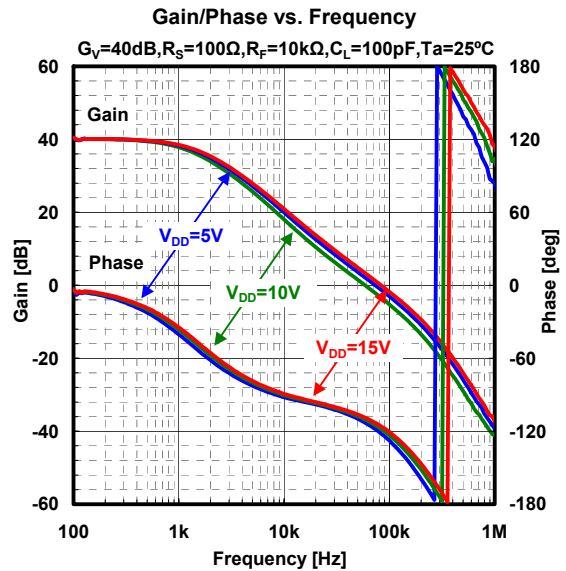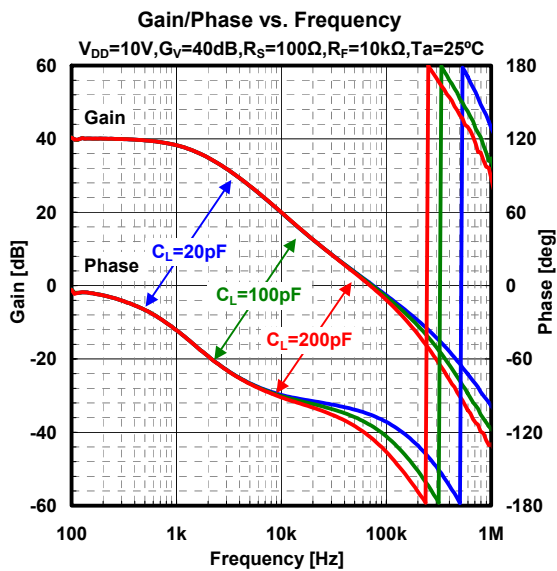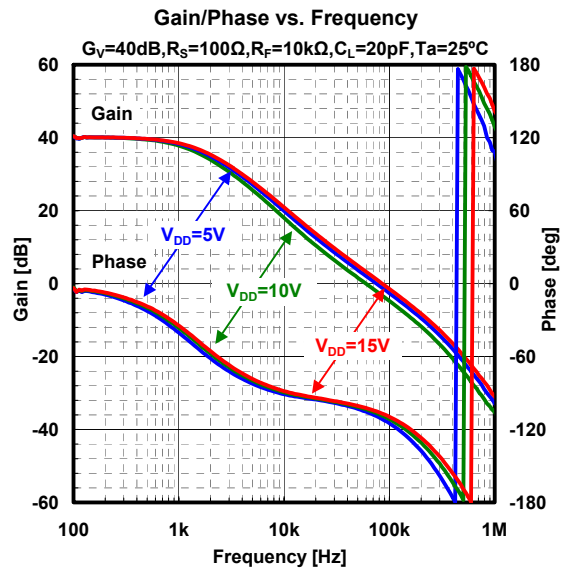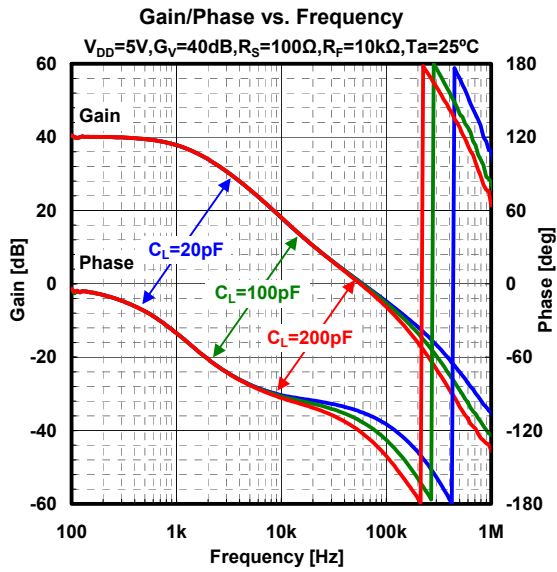

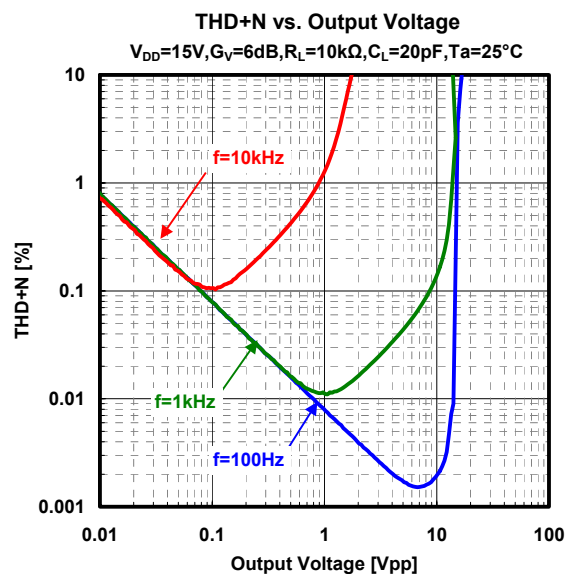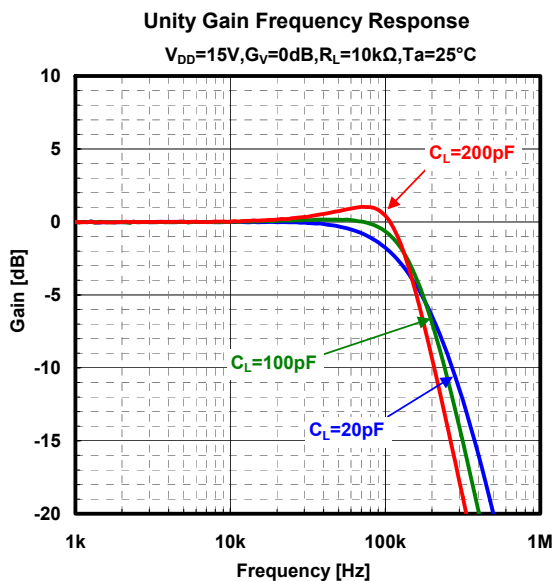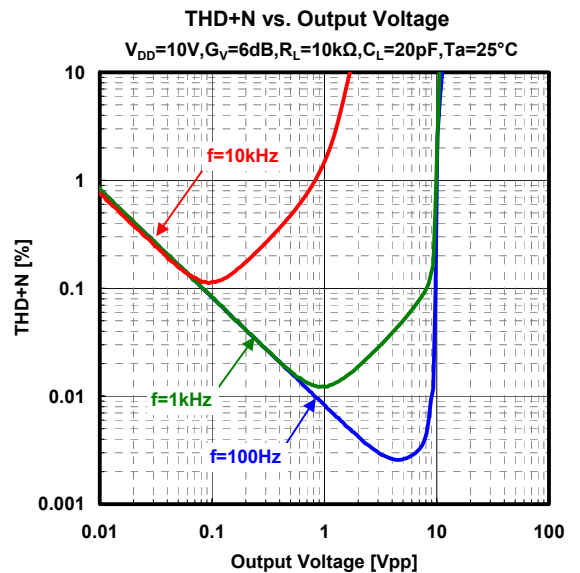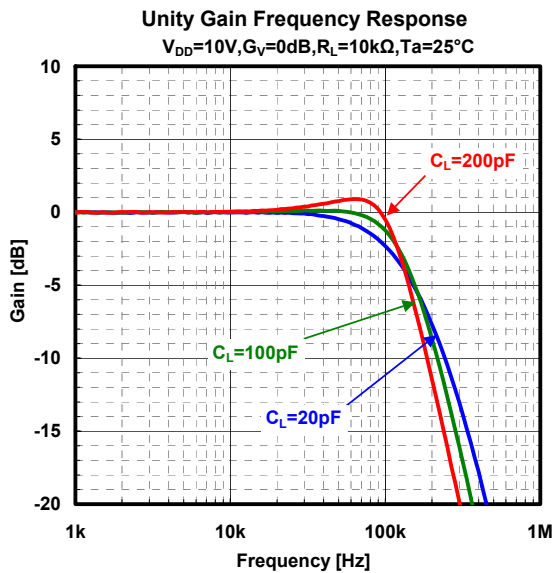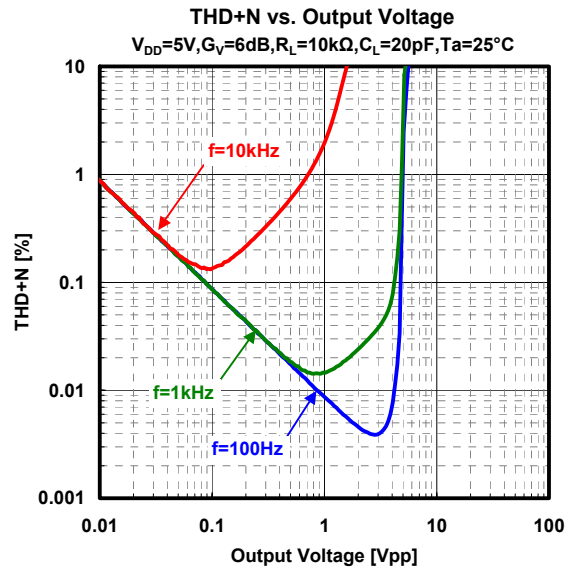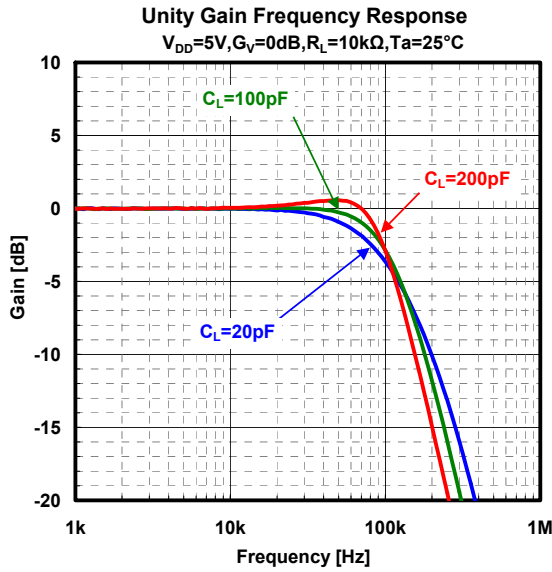


Equivalent Input Noise Voltage

$R_S=1k\Omega, R_F=10k\Omega, T_a=25^\circ C$

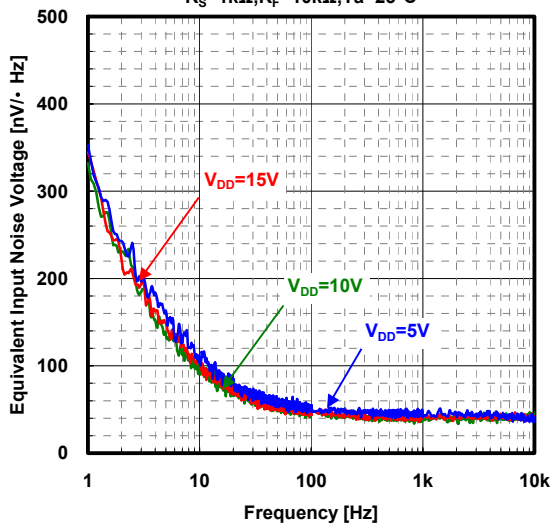


Channel Separation vs. Frequency

$R_S=1k\Omega, R_F=100k\Omega, R_T=1k\Omega, T_a=25^\circ C$

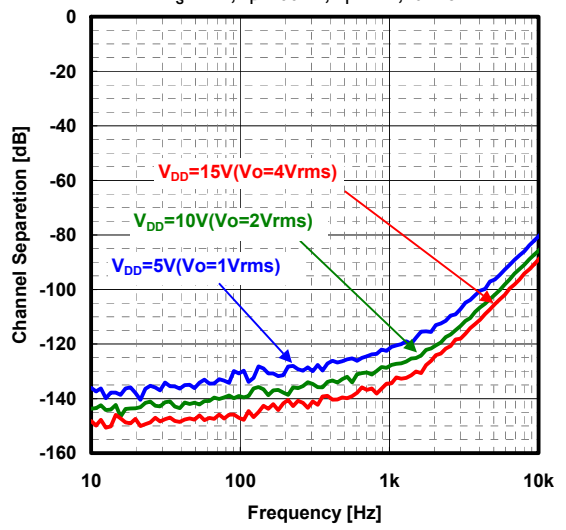


Transient Response

$V_{DD}=5V, G_V=0dB, V_{IN}=1V_{pp}, R_L=10k\Omega, T_a=25^\circ C$

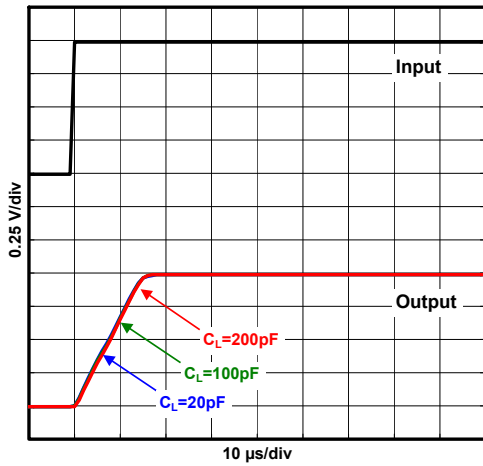


Transient Response

$V_{DD}=5V, G_V=0dB, V_{IN}=1V_{pp}, R_L=10k\Omega, T_a=25^\circ C$

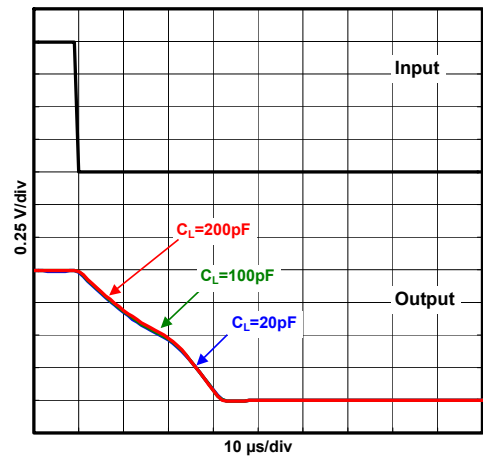


Transient Response



$V_{DD}=10V, G_V=0dB, V_{IN}=6V_{pp}, R_L=10k\Omega, T_a=25^\circ C$

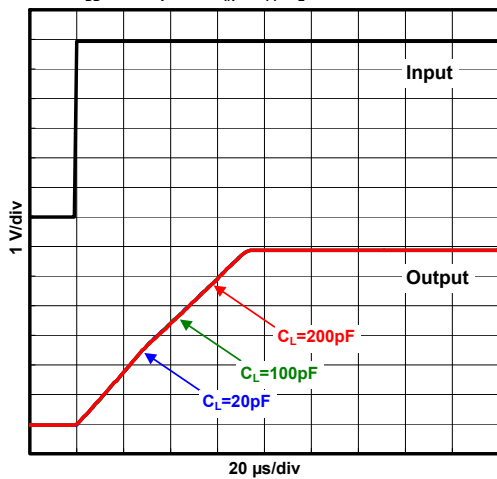

Transient Response

$V_{DD}=10V, G_V=0dB, V_{IN}=6V_{pp}, R_L=10k\Omega, T_a=25^\circ C$

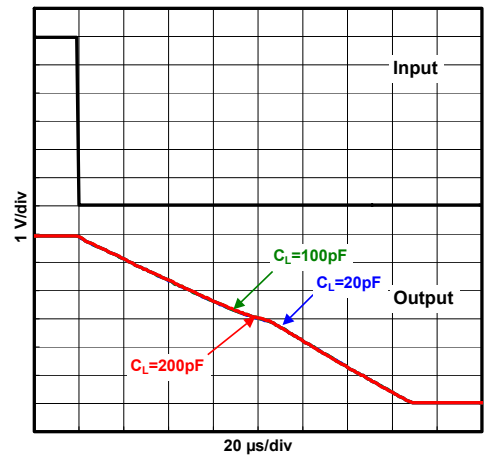

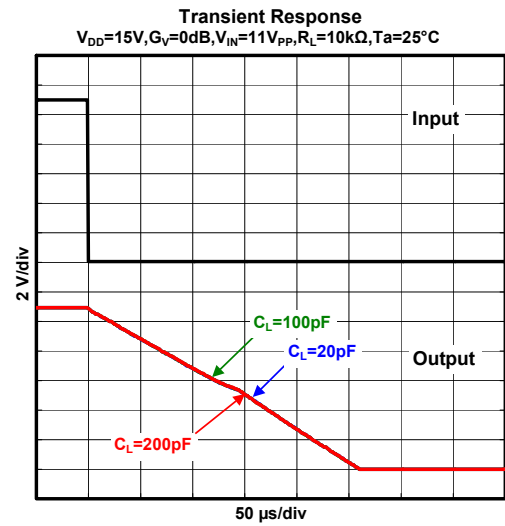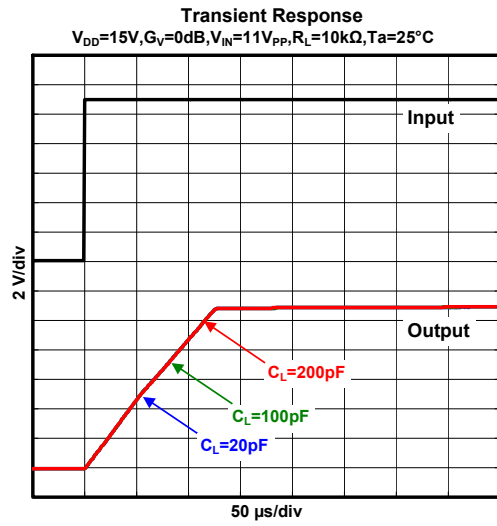

[CAUTION]
 The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.