



38.6×34×17.2

JMX-94F₂

12002068086

Features	
▪ Magnet latching relay.	
▪ High sensitivity & reliability.	
▪ Well anti-shock and anti-vibration.	
▪ Heavy contact load.	

Ordering Information	
JMX-94F₂	A Z 60 DC12V D
1 Part number: JMX-94F ₂	4 Contact current: 60:60A; 80:80A
2 Contact arrangement: 1A, 1B	5 Coil rated voltage(V): DC: 9,12, 24
3 Enclosure: Z: Dust cover	6 Contact material:C:AgCdO; S:AgSnO ₂
	7 Coil : NIL:Singal coil; D: Double coils

Contact Data		
Contact Arrangement	1A (SPSTNO) 1B (SPSTNC)	
Contact Material	AgCdO AgSnO ₂	
Contact Rating(resistive)	80A/250VAC 60A/250VAC	
Max. Switching Power	20000VA 15000VA	
Max. Switching Voltage	300VAC Max. Switching Current:80A	
Contact Resistance & Voltage drop	≤5mΩ (at 1A/24VDC) Item 4.12 of IEC 61810-7 ≤100mV (40A) Item 4.12 of IEC 61810-7	
Operation life	Electrical (Rated load)	10 ⁴ Item 4.30 of IEC 61810-7
	Mechanical (No load)	10 ⁶ Item 4.31 of IEC 61810-7

Coil Parameter							
Dash numbers	Coil rated voltage VDC	Coil resistance Ω ±10%	Switching voltage VDC (50%-80% of rated voltage)	Pulse magnitude ms	Coil power consumption W	Operate Time ms	Reset Time ms
1 Coil							
009-1000	9	81	4.5~7.2	≥60	1	≤20	≤20
012-1000	12	144	6.0~9.6				
024-1000	24	576	12.0~19.2				
009-1500	9	54	4.5~7.2	≥60	1.5	≤20	≤20
012-1500	12	96	6.0~9.6				
024-1500	24	384	12.0~19.2				
2 Coil							
009-2000	9	2×27	4.5~7.2	≥60	2×3	≤20	≤20
012-2000	12	2×48	6.0~9.6				
024-2000	24	2×192	12.0~19.2				
009-2000	9	2×40.5	4.5~7.2	≥60	2×2	≤20	≤20
012-2000	12	2×72	6.0~9.6				
024-2000	24	2×288	12.0~19.2				

CAUTION: 1.When latching relays are installed in equipment, the latch and reset coil should not be powered simultaneously. Coil should not be pulsed with less than the nominal coil voltage and pulse width should be a minimum of three times the specified operate time of the relay. If these conditions are not followed, it is possible for the relay to in be the magnetically neutral position .
2.Switching voltage is for test purpose only and are no to be used as design criteria.


Operation condition

Insulation Resistance	1000MΩ min (at 500VDC)	Item 7 of IEC 60255-5
Dielectric Strength		
Between contacts	50Hz 1500V	Item 6 of IEC 60255-5
Between contact and coil	50Hz 4000V	Item 6 of IEC 60255-5
Creepage distance	8.4mm	Addenda B of IEC 60255-5
Shock resistance	Functional 100m/s ² ;Survival:1000 m/s ² 11ms	IEC 68-2-27 Test Ea
Vibration resistance	10Hz~55Hz Double amplitude 1.5mm	IEC 68-2-6 Test Fc
Terminals strength	5N	IEC 68-2-21 Test Ua1
Solderability	235℃±2℃ 3s±0.5s	IEC 68-2-20 Test Ta method 1
Ambient Temperature	-40℃~70℃	
Relative Humidity	85% (at 40℃)	IEC 68-2-3 Test Ca
Mass	38g	

Safety approvals

Safety approval	CQC
Load	60A,80A/220VAC

Dimensions

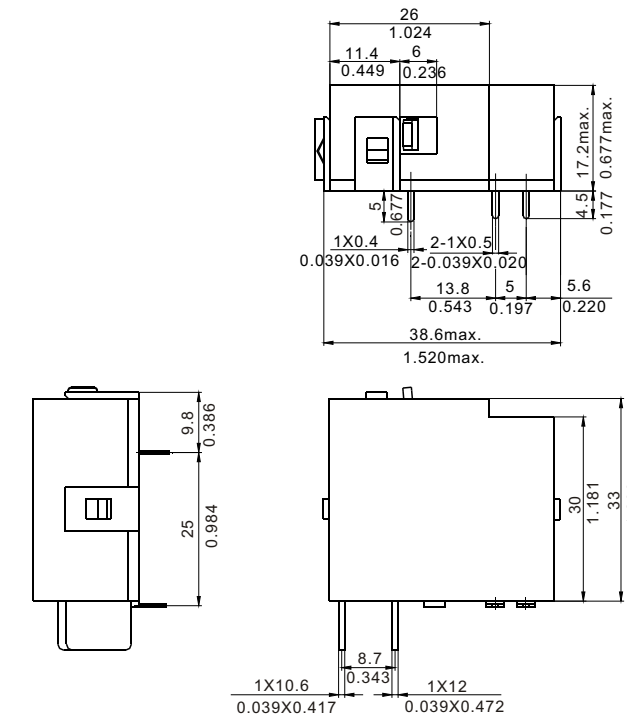

Dimensions Mounting (Bottom view)



Wiring diagram

NOTES: 1).Dimensions are in millimeters.
2).Inch equivalents are given for general information only.
3).Relays shall have plus(+) signs or “+” and “-” placed on the circuit diagram as shown.