

LISA-U2 series

3.75G UMTS/HSPA+ module

Highlights

- Worldwide WCDMA(UMTS) and GPRS/EDGE coverage
- HSDPA 21.1 Mb/s, HSUPA 5.76 Mb/s
- SMT form factor, small foot-print
- Easy migration from u-blox GSM/GPRS modules
- Low idle mode current: 1.5 mA
- Extended temperature range: -40 to +85°C
- Simple integration of u-blox GPS/GNSS and A-GPS
- CellLocate™: location based on cellular network
- Manufactured in ISO/TS 16949 certified production sites



LISA-U2 series:
22.4 x 33.2 x 2.6 mm

Product description

With 6-band WCDMA(UMTS) and quad-band GPRS/EDGE, LISA-U2 modules are suited for networks worldwide. Features include data-rates of up to 21.1 Mb/s (downlink), a rich set of internet protocols, very small footprint, very low power consumption and extended operating temperature range. LISA-U2 modules provide fully integrated access to u-blox positioning products. Antenna diversity permits LISA-U2 modules to provide the highest data speeds.

LISA-U2 modules are ideal for consumer and industrial applications requiring high-speed data transmission rates, and machine-to-machine applications. They are the perfect choice for mobile Internet terminals, tablets, in-car infotainment, connected navigation systems, security and surveillance systems, eCall, fleet management, metering, anti-theft systems, and other automotive applications.

The compact SMT package enables easy manufacturing, and migration from u-blox SARA, LEON, and other LISA modules is simple. This allows customers to take maximum advantage of their hardware and software investments, and provides very short time-to-market. An extensive set of national regulatory and operator certificates is available. RIL software for Android and Embedded Windows is available free of charge.

LISA-U2 modules are manufactured in ISO/TS 16949 certified sites. Each module is tested and inspected during production. The modules are qualified according to ISO 16750 - Environmental conditions and electrical testing for electrical and electronic equipment for road vehicles.

Product selector

Module	Technology		Bands	Interface					Audio	Functions															
	HSUPA [Mb/s]	HSDPA [Mb/s]	UMTS/HSPA [MHz]	GPRS/EDGE	quad-band	UART	SPI	USB	DDC for u-blox	GPIO	Analog Audio	Digital Audio	Network indication	Antenna Supervisor	Jamming Detection	Embedded TCP/UDP	Embedded HTTP, FTP, SSL	GPS via Modem	AssistNow software	FW update via serial	FOTA	eCall / ERA-GLONASS	Rx diversity	CellLocate	
LISA-U200	5.76	7.2	800/850/900/1700/1900/2100	•		1	1	1	1	14		2	•	•	•	•	•	•	•	•	•	•	•	•	•
LISA-U230	5.76	21.1	800/850/900/1700/1900/2100	•		1	1	1	1	14		2	•	•	•	•	•	•	•	•	•	•	•	•	•
LISA-U260	5.76	7.2	850/1900	•		1	1	1	1	14		2	•	•	•	•	•	•	•	•	•	•	•	•	•
LISA-U270	5.76	7.2	900/2100	•		1	1	1	1	14		2	•	•	•	•	•	•	•	•	•	•	•	•	•
LISA-U200 FOTA	5.76	7.2	800/850/900/1700/1900/2100	•		1	1	1	1	14		2	•	•	•	•	•	•	•	•	•	•	•	•	•

Features

UMTS/HSPA	800/850/900/1700/1900/2100 MHz (Bands VI, V, VIII, IV, II, I) 3GPP Release 7 5.76 Mb/s uplink, 21.1 Mb/s downlink or 5.76 Mb/s uplink, 7.2 Mb/s downlink
GSM	GSM 850 / 900 / 1800 / 1900 MHz 3GPP Release 7 PBCCH support
GPRS	Class 12, CS1-CS4 - up to 86.5 kb/s
EDGE	Class 12, MCS1-9 - up to 236.8 kb/s
CSD	GSM max 9.6 kb/s UMTS max 64 kb/s
SMS	MT/MO PDU / Text mode
Voice	HR/FR/EFR/AMR/AMR-WB

Software features

Protocols	Embedded TCP/IP, UDP/IP HTTP/FTP/SSL (Secure Socket Layer)
Network	Jamming detection
GPS Interfaces	Direct access to u-blox GPS via LISA AssistNow software for fastest GPS Time-to-First-Fix CellLocate & Hybrid Positioning
Firmware upgrade	Via UART and USB

Electrical data

Power supply	3.3 V to 4.4 V
Power consumption	
Power Off	50 µA
Idle (2G, DRX5)	1.5 mA
Idle (3G, DRX7)	1.6 mA
GSM Voice	190 mA (Bands II & III)
UMTS Voice	460 mA (Band V)
GPRS Data	190 mA (1 Tx slot, Bands II & III) 450 mA (4 Tx slots, Bands II & III)
HSDPA (cat 8)	580 mA (Band V)
HSPA	460 mA (Band V)

Interfaces

GPIO	Up to 14 GPIOs, configurable
(U)SIM	Supports 1.8 V and 3 V, SIM toolkit
Serial	1 UART 1 USB 2.0 (high-speed, 480 Mb/s) 1 SPI
Audio	2 digital

Certifications and approvals

GCF, R&TTE, PTCRB, FCC, IC, JATE/TELEC (Japan), A-tic (Australia), IDA (Singapore), ANATEL (Brazil).
AT&T, DoCoMo, Telstra, Vodafone, Rogers (Canada).

Legal Notice

u-blox reserves all rights to this document and the information contained herein. Products, names, logos and designs described herein may in whole or in part be subject to intellectual property rights. Reproduction, use, modification or disclosure to third parties of this document or any part thereof without the express permission of u-blox is strictly prohibited.


The information contained herein is provided "as is". No warranty of any kind, either express or implied, is made in relation to the accuracy, reliability, fitness for a particular purpose or content of this document. This document may be revised by u-blox at any time. For most recent documents, please visit www.u-blox.com.

Copyright © 2013, u-blox AG

Package

76 pin LCC (Leadless Chip Carrier): 22.4 x 33.2 x 2.6 mm, < 7 g

Pinout

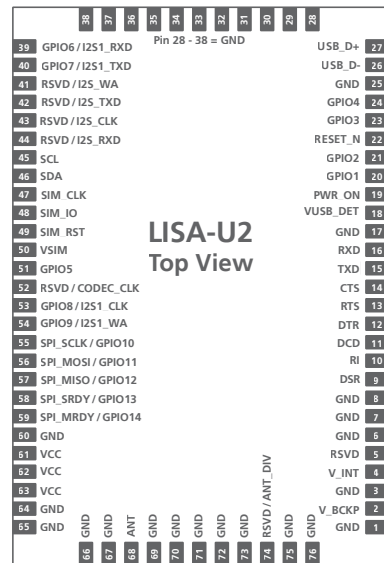

Environmental data, quality & reliability

Operating temperature -40 to +85°C (extended range)

RoHS compliant (lead-free)

Qualification according to ISO 16750

Manufactured in ISO/TS 16949 certified production sites

Support products

EVK-U20 / EVK-U23	Evaluation Kits for LISA-U2 series
RIL software	Android 2.3 & 4.0, Embedded Windows 6.x 7.x Windows Mobile 6.5
USB driver	Embedded Windows 6.x 7.x, Windows XP, Vista, 7, Windows Mobile 6.5

Ordering information

LISA-U200-xxS ³	UMTS/HSPA, 800/850/900/1700/1900/2100 MHz, quad-band GPRS/EDGE
LISA-U230-xxS ³	UMTS/HSPA+, 800/850/900/1700/1900/2100 MHz, quad-band GPRS/EDGE
LISA-U260-xxS ³	UMTS/HSPA, 850/1900, quad-band GPRS/EDGE
LISA-U270-xxS ³	UMTS/HSPA, 900/2100, quad-band GPRS/EDGE

³ xx refers to firmware version.

Contact us

HQ Switzerland +41 44 722 7444 info@u-blox.com	China +86 10 68 133 545 info_cn@u-blox.com
EMEA +41 44 722 7444 info@u-blox.com	Japan +81 3 5775 3850 info_jp@u-blox.com
Americas +1 703 483 3180 info_us@u-blox.com	Korea +82 2 542 0861 info_kr@u-blox.com
APAC – Singapore +65 6734 3811 info_ap@u-blox.com	Taiwan +886 2 2657 1090 info_tw@u-blox.com