




REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 11/16/06'		

NOTES:


1. SPECIFICATIONS

- . Contact Resistance: 50mΩ max
- . Insulator Resistance: 100MΩ min.
- . Current Rating: 0.5A per pin max.
- . Rated Voltage: 30V DC
- . Dielectric withstanding voltage: AC 100V For 1 minute
- . Contact: Copper Alloy
- . Housing: Thermoplastic(UL 94V-0)

2. PRODUCT NUMBER CODE:

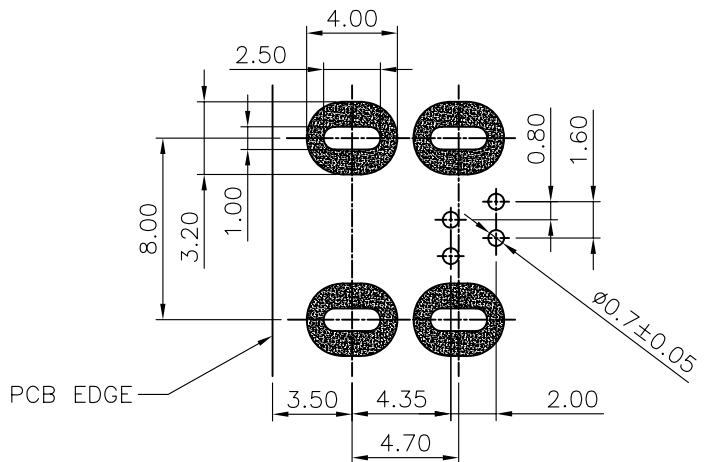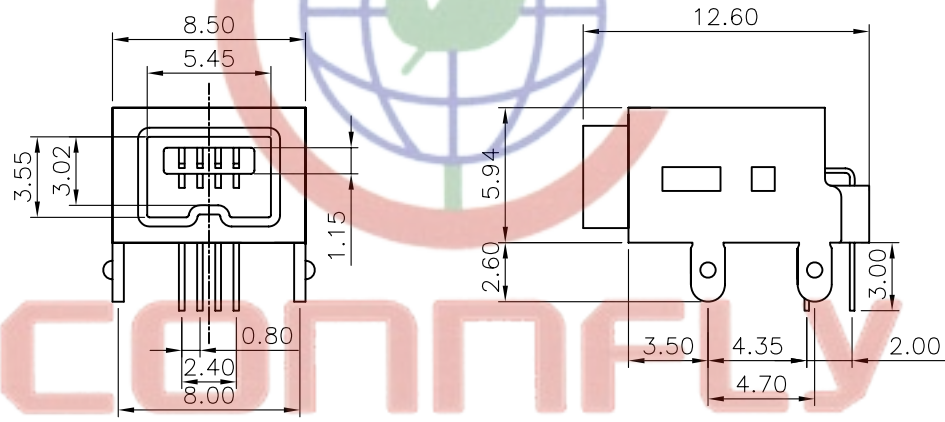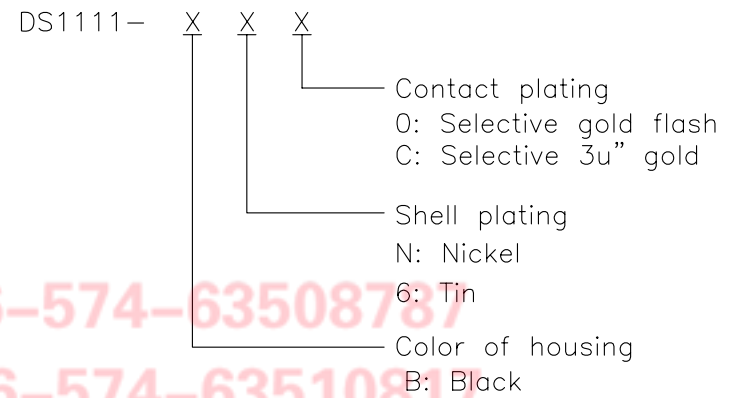

RECOMMEND PCB LAYOUT(Tolerance= $\pm 0.05$ )

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE		
X. $\pm 0.60$	X. $\pm 5^\circ$	UNITS	MINI 1394 4PIN FEMALE RIGHT ANGLE		
.X $\pm 0.38$	.X $\pm 3^\circ$	SHEET SIZE	SERIES DS1111 SERIES		
.XX $\pm 0.25$	.XX $\pm 2^\circ$				
DRAWING TYPE	CUSTOMER	 <b>晨翔电子有限公司</b> <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>			
SCALE	1:1			SHEET	1 OF 1
DRAWING NO.	C-DS1111-XXX				

Tel:86-574-63508787  
 Fax:86-574-63510817  
 E-mail:sale@zhenqin.com.cn  
 Http://www.connfly.com