



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Product Description: Crystal Unit 3.2x1.5 32.768KHz

TST Part No.: TZ1166B

Customer Part No.: UXC-S3215-32K-NRF-A

Customer signature required
Company: _____
Division: _____
Approved by : _____
Date: _____

Checked by: _____ Ginger Huang *Ginger Huang*

Approved by: _____ Kelly Huang *Kelly Huang*

Date: _____ 02/26/2015

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.



TAI-SAW TECHNOLOGY CO., LTD.
3.2x1.5 32.768KHz Crystal Unit

MODEL NO.: TZ1166B (UXC-S3215-32K-NRF-A)

REV. NO.: 2.0

Revise:

Rev.	Rev. Page	Rev. Account	Date	Ref. No.	Reviser
1	N/A	Initial release	09/16/14'	N/A	Ginger Huang
2	P3	Change Marking & C1,Co spec	01/21/15'	ECN-201500026	Ginger Huang
3	P3	Revised the aging spec to +/-10ppm/10 years	02/26/15'	ECN-201500026	Ginger Huang



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SMD 3.2x1.5 32.768KHz Crystal Unit

MODEL NO.: TZ1166B (UXC-S3215-32K-NRF-A)

REV. NO.: 2.0

Features:

- Ceramic Seam Weld Package
- Excellent Reliability Performance
- Ultra Miniature Package
- Available to Surface Mount Technology and IR Reflow Process

RoHS Compliant
Lead free
Lead-free soldering


Description and Applications:

Surface mount 3.2mmx1.5mm crystal unit for use in communications devices,.


Electrical Specifications:

TZ1166B (UXC-S3215-32K-NRF-A)	Specification
Nominal Frequency	32.768000 KHz
Mode of Oscillation	Fundamental
Storage Temperature Range	-55°C to +125°C
Operating Temperature Range	-40°C to +85°C
Frequency vs. Temperature	-0.04 ppm / °C ² max.
Turnover temperature	25 +/-5°C
Frequency Make Tolerance (FL)	+/-20 ppm @ 25°C +/- 3°C
Equivalent Series Resistance (ESR)	70k Ω max
Nominal Drive Level	0.1 uW
Shunt Capacitance (Co)	1.34 pF typ
Motional Capacitance (C1)	4.64 fF typ
Load Capacitance (CL)	7 pF
Aging	+/-10 ppm/ 10years @25°C
Insulation Resistance	500 MΩ min./DC 100V +/-15
Marking	Inerasable marking


Mechanical Dimensions (mm):

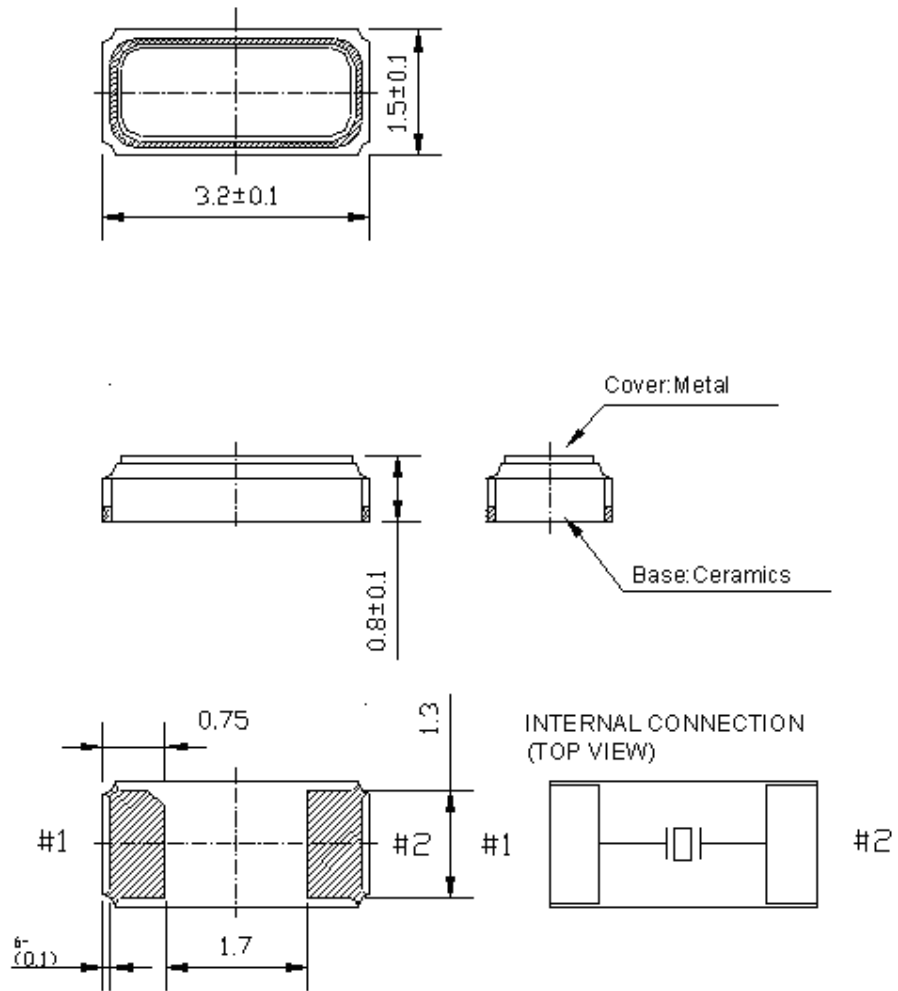

Recommended soldering pattern

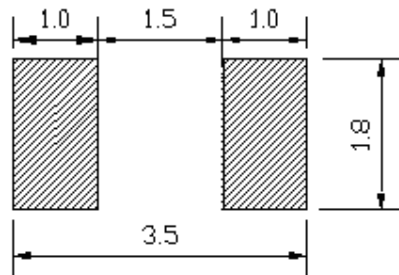

Marking:

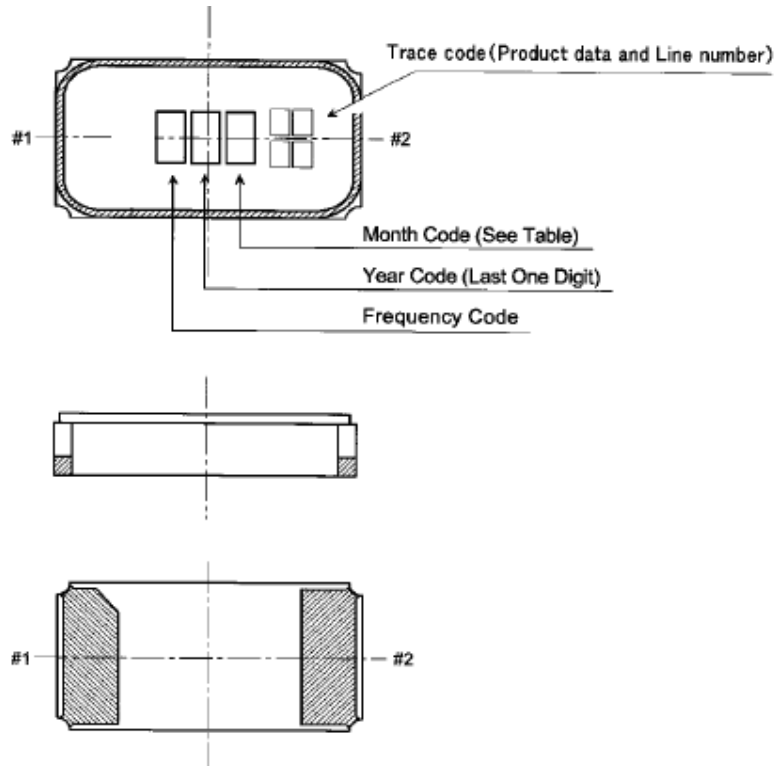

NOTE

1. Month Code

Month	1 Jan.	2 Feb.	3 Mar.	4 Apr.	5 May	6 June	7 July	8 Aug.	9 Sep.	10 Oct.	11 Nov.	12 Dec.
Month Code	1	2	3	4	5	6	7	8	9	X	Y	Z


2. Frequency Code

A : 32.768kHz



3. Marking Method

Marking Method is Laser Trimming.


Reel Dimensions (mm):

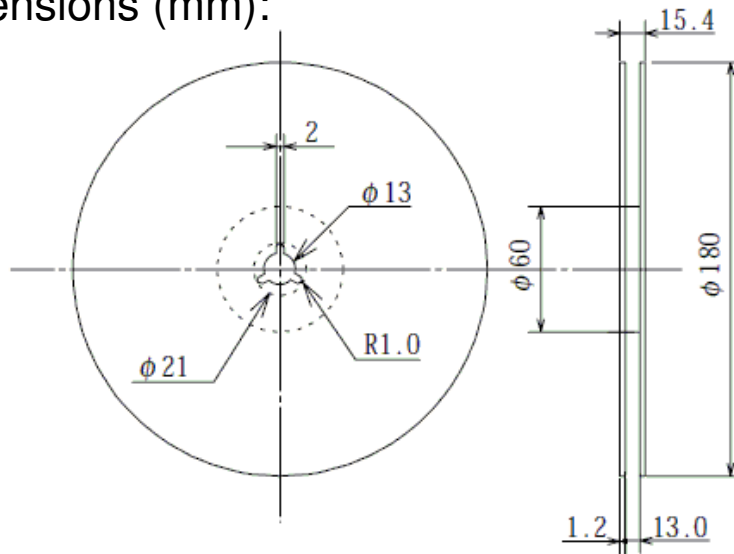


Tape Dimensions (mm):

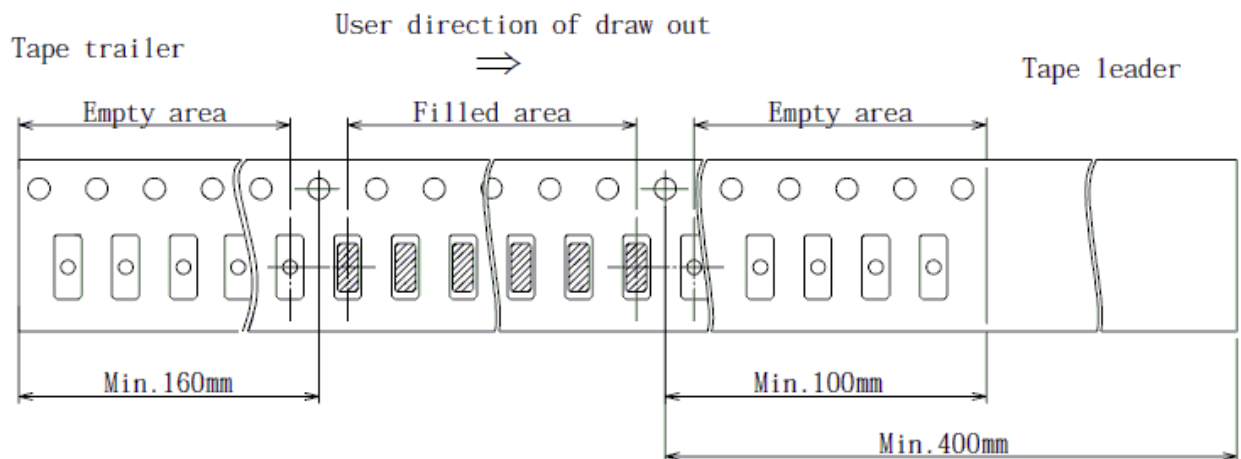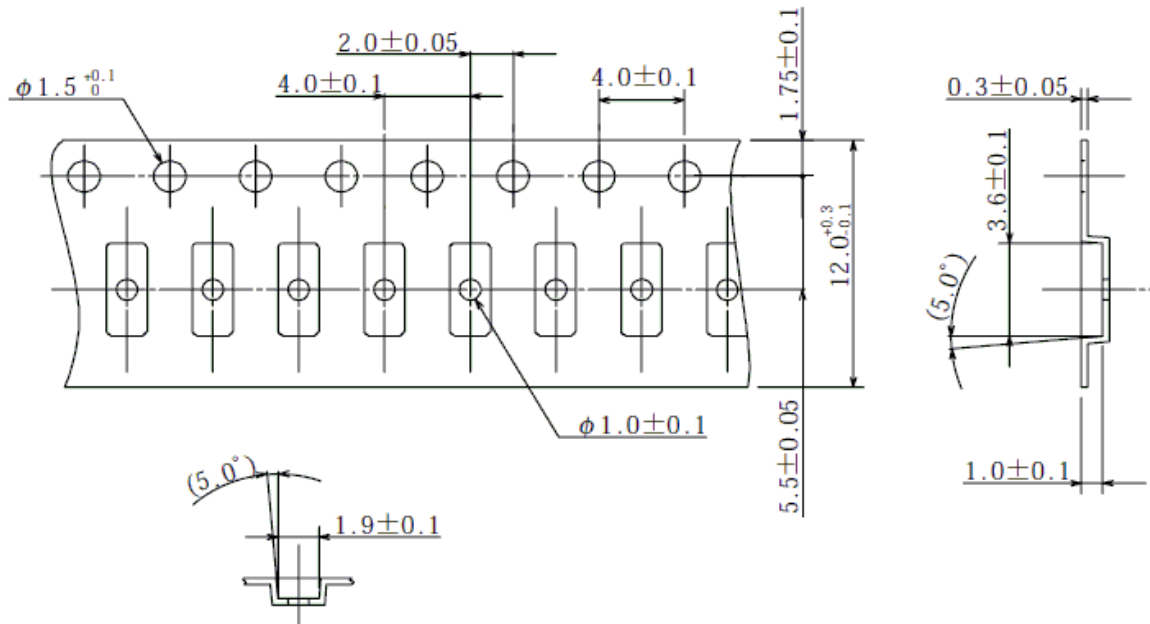

Packing Quantity/Packing: 3K pcs maximum per reel

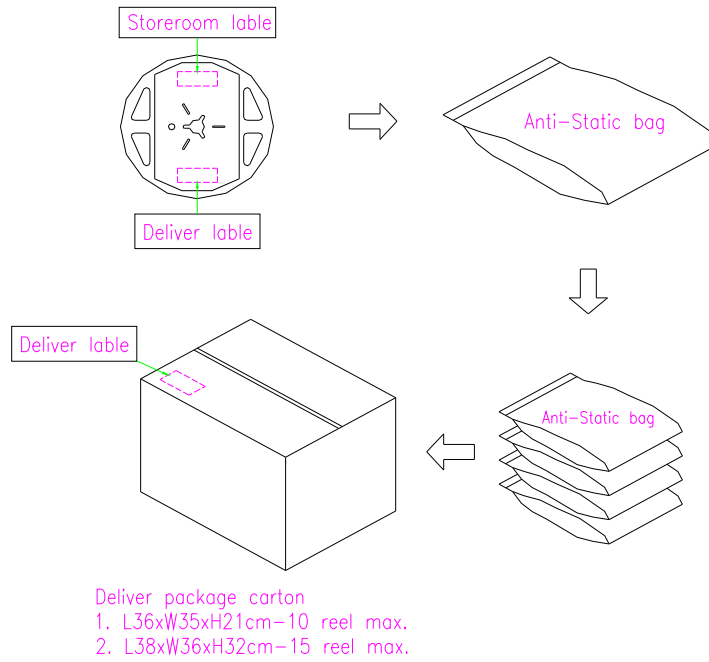

Reflow Profile:

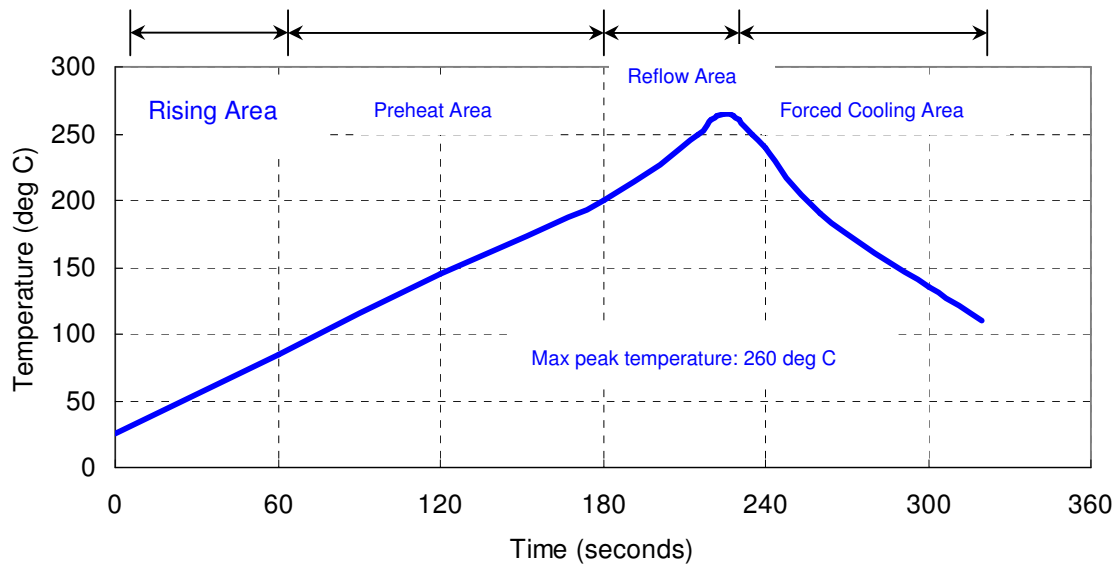

Reliability Specifications

Test name	Test process / method	Reference standard
Mechanical characteristics		
resistance to Soldering heat (IR reflow)	Temp./ Duration : 260 °C /10sec ×2 times Total time : 4min.(IR-reflow)	EIAJED-4701 -300(301)M(II)
Vibration	Total peak amplitude : 1.5mm Vibration frequency : 10 to 55 Hz Sweep period : 1.0 minute Vibration directions : 3 mutually perpendicular Duration : 2 hr / direc.	MIL-STD 202F method 201A
Mechanical Shock	directions : 3 impacts per axis Acceleration : 3000g's, +20/-0 % Duration : 0.3 ms (total 18 shocks) Waveform : Half-sine	MIL-STD 202F method 213C
Solderability	Solder Temperature:265±5 °C Duration time: 5±0.5 seconds.	MIL-STD 883G method 2003
Environmental characteristics		
Thermal Shock	Heat cycle conditions -55 °C (30min) ↔ 125 °C (30min) * cycle time : 10 times	MIL-STD 883G method 1010.7
Humidity test	Temperature : 70 ± 2 °C Relative humidity : 90~95% Duration : 96 hours	MIL-STD 202F method 103B
Dry heat (Aging test)	Temperature : 125 ± 2 °C Duration : 168 hours	MIL-STD 883G method 1008.2 condition C
PCT test	Pressure: 2.06kg/cm ² (2.03*10 ⁵ pa) Temperature : 121 ± 2 °C Relative humidity : 100% Duration : 24 hours	EIAJED-4701-3 B-123A