

# Series7L



**SURFACE MOUNT PACKAGE FOR TUNING FORK CRYSTAL**

---



Approved by:
Checked by:
Issued by:

## **SPECIFICATION**

**P/N: UXC-S3215-32K-NRF-S**

**深圳市晶科鑫实业有限公司**

**SHENZHEN CRYSTAL TECHNOLOGY INDUSTRIAL CO., LTD.**

Tel: 86-755-88352809

Fax: 86-755-88353718

E-mail: [sjksale@126.com](mailto:sjksale@126.com)

URL: [Http://www.g-crystal.com](http://www.g-crystal.com)

# Series7L



## SURFACE MOUNT PACKAGE FOR TUNING FORK CRYSTAL

### FEATURE

- I Wide Frequency range
- I Small size
- I Tape & Reel
- I Reflow available

### APPLICATIONS


- I Microprocessor Systems
- I Consumer Electronics

### ELECTRICAL SPECIFICATIONS

Frequency	32.768KHz
Frequency Tolerance (at 25°C)	±20ppm
ESR	70Kohm Max
Turnover Temperature	25 ± 5°C
Frequency Temperature Curve	-0.034(±0.006)ppm/°C <sup>2</sup>
Storage Temperature Range	-55 °C to +125 °C
Operable Temperature Range	-40 °C to + 85 °C
Shunt Capacitance (C0)	1.3pF Typ
Dynamic Capacitance (C1)	2.4fF Typ
Driver Level (Typical)	1 μW Max
Load Capacitance(C <sub>L</sub> )	7 pF
Aging @25°C 1 <sup>st</sup> year (Max)	±3ppm/year

**REMARK:** SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE. PLEASE CONFIRM WITH OUR SALES ENGINEER.

### Frequency VS Temperature Curve

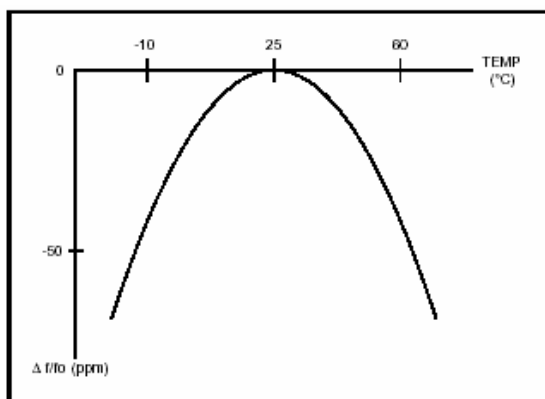


The design, manufacturing process, and specifications of this device are subject to change without notice.  
Page 2 of 3


# Series7L

## SURFACE MOUNT PACKAGE FOR TUNING FORK CRYSTAL

Dimensions (Unit: mm)

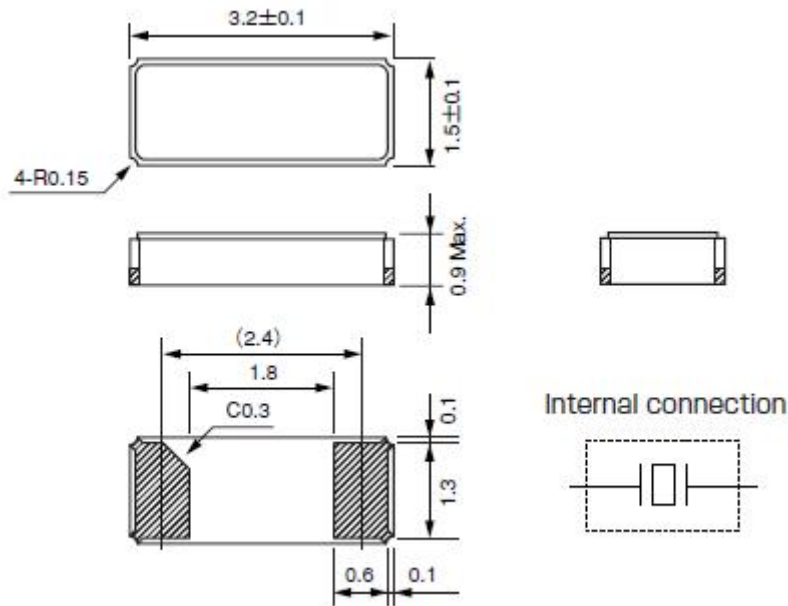

### Solder Pad Layout (Unit:mm)

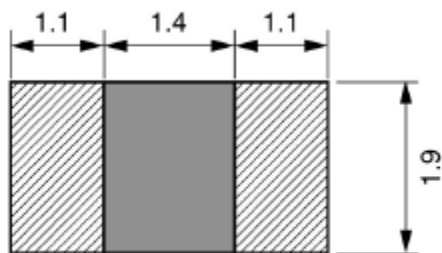

\* Do not design any patterns on shaded area.

### Reflow Soldering Profile

