


RoHS

IP66-68

REV.	DESCRIPTION	DATE
A	ISSUE	May/04/2015
A1	Add 7~8Pin & Correct Pin Assignment.	Oct/26/2018

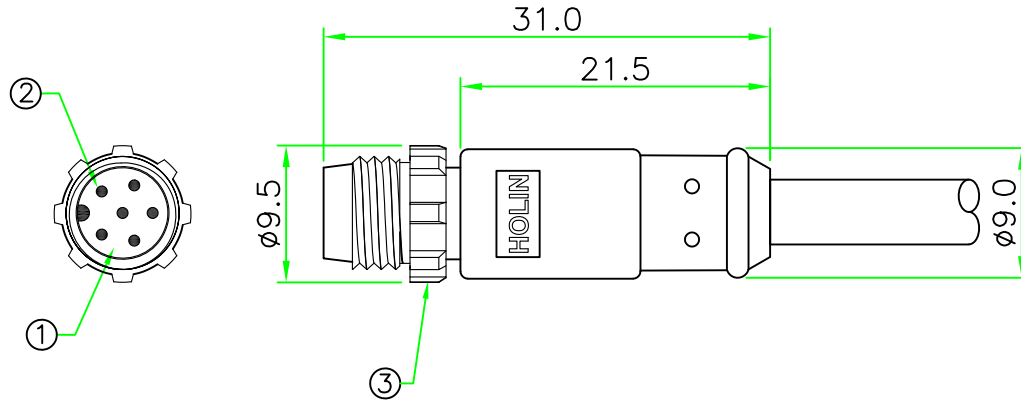

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 1.5A / 3A

TEMPERATURE RANGE: -20°C TO +80°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE


2. HOW TO ORDER: A08x-P1xxSN



- 02 - 2 PINS 06 - 6 PINS
- 03 - 3 PINS 07 - 7 PINS
- 04 - 4 PINS 08 - 8 PINS
- 05 - 5 PINS

- I - CURRENT RATING 1.5A
- D - CURRENT RATING 3A

*Cable specification and length can be customized.

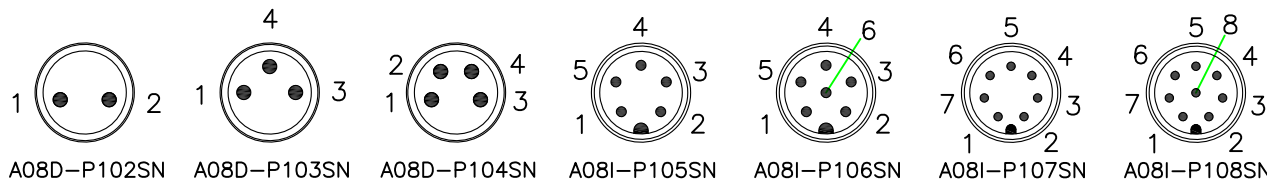

PIN ASSIGNMENT FRONT VIEW (前視圖)

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE :	M8 A-Coding Male
SCALE	2:1		All Pastic Molded Cable Ass'y
UNLESS OTHERWISE SPECIFIED TOLERANCES:		P/N:	A08x-P1xxSN
.x ± 0.5 .xx ± 0.25			
.xxx± 0.1 ANGLE ± 1°			
REV.	SHEET	DWG.NO:	A08x-P1xxSN
A	1/1		


No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
3	RING NUT	Nylon + GF.	BLACK	1	
2	CONTACT	Brass , 6 u" Gold plated .Male Contact.		N	
1	CONNECTOR	M8 A-Coding Male Connector Insert.NYLON+GF.	BLACK	1	

DR. SIBYL
CH. ERIC
AP.

RoHS


IP66-68

REV.	DESCRIPTION	DATE
A	ISSUE	May/06/2015
A1	Correct Dimension.	Oct/29/2018

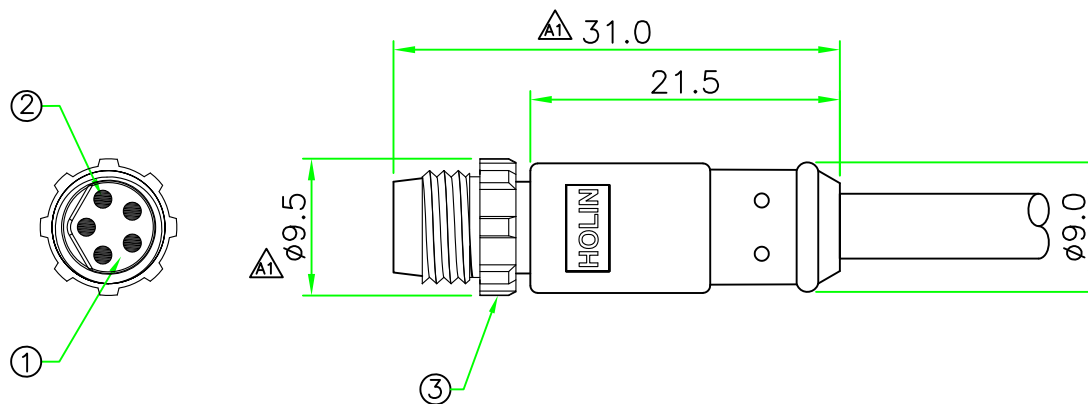

NOTES:

1. ELECTRICAL CHARACTERISTICS:
 CURRENT RATING: 3A
 TEMPERATURE RANGE: -20°C TO +80°C
 DIELECTRIC WITHSTANDING VOLTAGE:
 500V AC FOR ONE MINUTE



PIN ASSIGNMENT
FRONT VIEW
(前視圖)

*Cable specification and length can be customized.

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
3	RING NUT	Nylon + GF.	BLACK	1	
2	CONTACT	Brass , 6 u" Gold Plated .Male Contact.		5	
1	CONNECTOR	M8 B-Coding Male Connector Insert. Nylon+GF.	BLACK	1	

HOLIN [®] HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司	
UNIT: mm SCALE 2:1	TITLE : M8 B-Coding Male All Plastic Molded Cable Ass'y
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°	P/N: B08D-P105SN DR. SIBYL CH. ERIC
REV. A1 SHEET 1/1	DWG.NO: B08D-P105SN AP.