


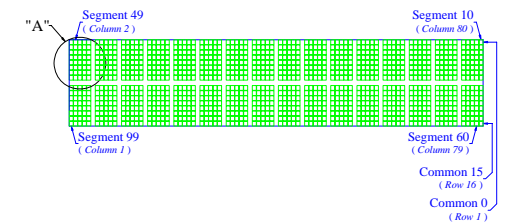


Item	Date	Remark
A	20120730	Original Drawing

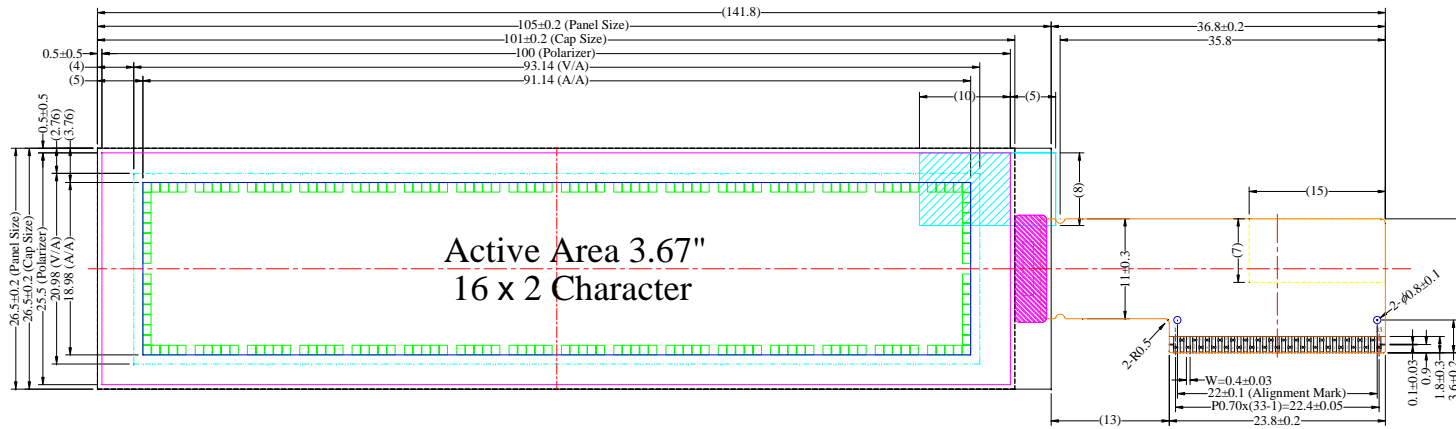

Pin	Symbol
1	N.C.
2	VSL
3	VSS
4	REGVDD
5	SHLC
6	SHLS
7	VDD
8	VDDIO
9	B50
10	BS1
11	BS2
12	GPIO
13	CS#
14	RES#
15	D/C#
16	R/W(WR#)
17	ERD#
18	D0
19	D1
20	D2
21	D3
22	D4
23	D5
24	D6
25	D7
26	IREF
27	ROM0
28	ROM1
29	OPR0
30	OPR1
31	VCOMH
32	VCI
33	N.C.

Notes:

- Color: Green
- Driver IC: US2066
- FPC Number: UT-1066-P04
- Interface:
4-/8-bit 68XX/80XX Parallel, SPI, I2C
- General Tolerance: ±0.30
- The total thickness (2.10 Max) is without polarizer protective film & remove tape.
The actual assembled total thickness with above materials should be 2.35 Max.

Customer Approval Signature	WiseChip Semiconductor Inc.							Drawing Number	Rev.	
	UC-1602ASGEG01 Folding Type OEL Display Module Pixel Number: Character 16 x 2, Monochrome, COG Package							DMX1602SDGF19	A	
							Material			
							Soda Lime / Polyimide			
Unit		mm	Title	Drawn	E.E.	Panel / E.	P.M.	Scale	Sheet	Size
General Roughness		\sqrt{Ra}	By	Dora Yang	Ting Kuo Hu	Ivy Lo	Kate Chung	1:1	1 of 1	A3
Tolerance			Date	20120730	20120730	20120730	20120730			
Dimension		±0.3								
Angle		±1								