
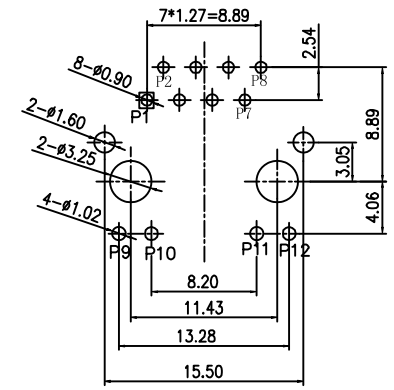

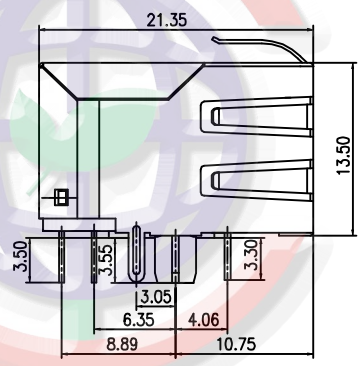


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 11/22/16'	~	

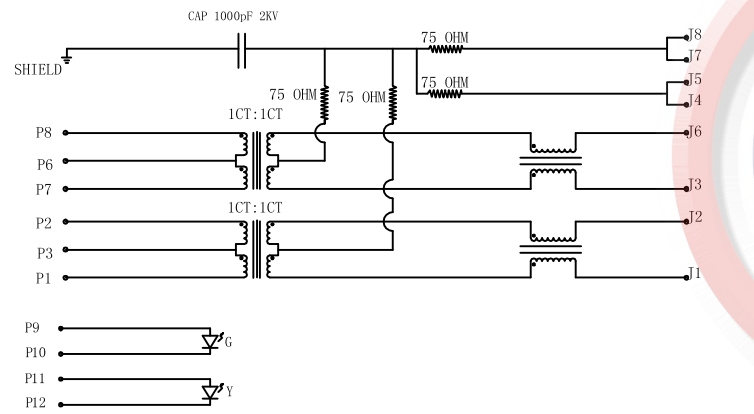


RECOMMEND PCB LAYOUT

ALL THE RAW MATERIALS MEET RoHS STANDARD

ELECTRICAL SPECIFICATIONS @25° C:(Cwmply Woith IEEE802.3)

- TURN RATIO: (P1~P2) : (J1~J2) : 1:±3%
(P7~P8) : (J3~J6) : 1:±3%
- INDUCTANCE: (P1~P2) AND (P7~P8) : 350uH MIN @0.1V, 100KHZ, 8mA DC BIAS
- LEAKAGE INDUCTANCE: P1~P2 (WITH J1 AND J2 SHORT) : 0.35uH MAX @1MHZ
P7~P8 (WITH J3 AND J6 SHORT) : 0.35uH MAX @1MHZ
- INTERWINDING CAPACITANCE: (P1~P2) : (J1~J2) : 35pF MAX @ 1MHZ
(P7~P8) : (J3~J6) : 35pF MAX @ 1MHZ
- DC RESISTANCE: (J1~J2) : (J3~J6) : 1.2 OHMS MAX
- RETURN LOSS: 1MHZ TO 30MHZ : -18dB MIN
30MHZ TO 60MHZ : -(18-20log(f/30))dB MIN (WHERE f IS IN MHZ)
60MHZ TO 80MHZ : -12dB MIN
- DIELECTRIC WITHSTAND: (P1~P2) : (J1~J2) : 1500VAC or 2250VDC
(P7~P8) : (J3~J6) : 1500VAC or 2250VDC
- INSERTION LOSS: 1MHZ TO 100MHZ : -1.2dB MAX
- CROSS TALK: 1MHZ TO 100MHZ : -30dB MIN
- COMMON TO COMMON MODE ATTENUATION: 1MHZ TO 100MHZ : -30dB MIN

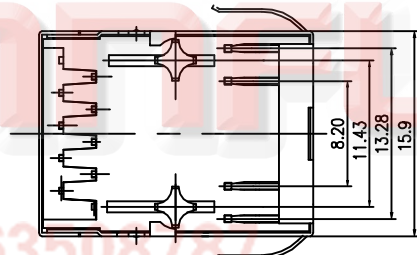

SPECIFICATION

- Insulation Resistance: 1000MΩ Min.
- Withstand Voltage: 500V, AC/Minute.
- Durability: 600 Cycles Min.
- Product Number Code:

DS1134-12-X X X X

- Housing Color
B: Black
- Contact Plating
4: Selective 3u" gold
J: Selective 5u" gold
5: Selective 15u" gold
- No. Of Contacts
8: 8p8c
- Connector Type
S: Socket

Tel: 86-574-63508787
Fax: 86-574-63510817
E-mail: sale@connfly.com
http://www.connfly.com
Add: East Industry Zone KuangYan
Town Cixi Ningbo China
P.C: 315333

GENERAL TOLERANCE	ANGLE TOLERANCE
X. ±0.60 .X ±0.38 .XX ±0.25	X. ±5° .X ±3° .XX ±2°
DRAWING TYPE	CUSTOMER
SCALE	1:1 SHEET 1 OF 1
DRAWING NO.	C-DS1134-12-XXXX-A

PROJECTION		TITLE	PCB JACK 8P 1PORT W/ LED
UNITS	mm		W/ Shell AFTER 3.05mm Type
SHEET SIZE	A4	SERIES	DS1134-12 SERIES

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD