
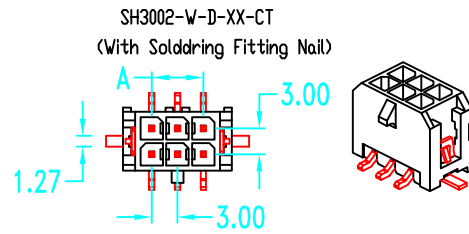


RoHS

REV	Date	Description

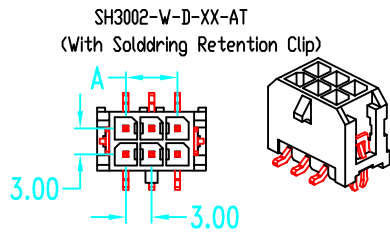

Features:

- 2 ~ 24 circuits available
- Material: LCP
- Tin-plated brass pin
- Mates with 30001HM-N housing

Specification:

- Current rating: 5A AC, DC
- Voltage rating: 250V AC, DC
- Contact resistance: 10m Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Operation temperature: -40°C~105°C
(Including Terminal temperature rise)

Ordering Information





HOW TO ORDER

SH3002-W-D-XX- A T-R
1 2 3 4 5 6 7

- | | |
|--|---|
| 1. Series No. :
SH3002 | 5. Wafer Function:
S: Straight
R: Right Angle |
| 2. Product:
H: Housing
W: WAFER
T: Terminal | A: SMT Straight
With Soldering Retention Clip
B: SMT Right Angle
With Soldering Retention Clip |
| 3. Row Type:
S: Single Row
D: Dual Row | C: SMT Straight
With Soldering Fitting Nail
D: SMT Right Angle
With Soldering Fitting Nail |
| 4. Contact No. :
02-12P (Single Row)
02-24P (Dual Row) | 6. Plating:
T: Tin
7. Pin Length of PCB thickness
RC1: 2.0mm
RC2: 3.2mm |


Dimensional Information:

Part No.	Dimensions	
	A	B
2P	--	6.7
4P	3.0	9.65
6P	6.0	12.65
8P	9.0	15.65
10P	12.0	18.65
12P	15.0	21.65
14P	18.0	24.65
16P	21.0	27.65
18P	24.0	30.65
20P	27.0	33.65
22P	30.0	36.65
24P	33.0	39.65

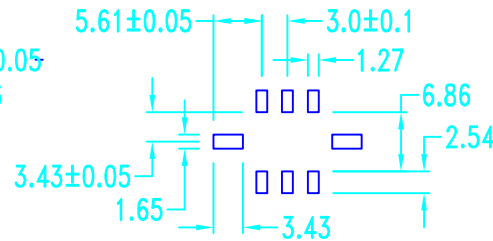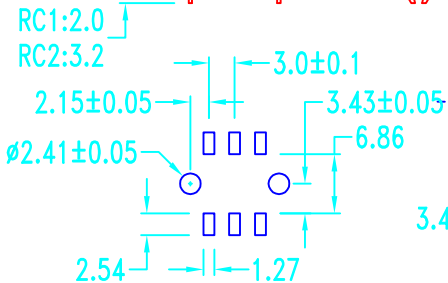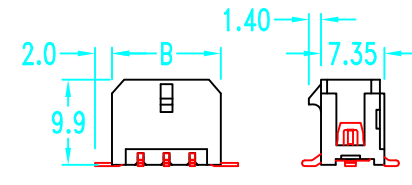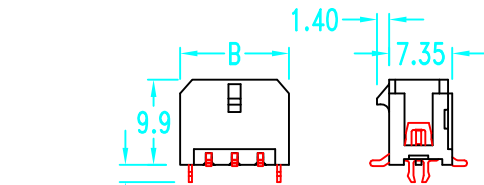

PCB Layout: Component side

PCB Layout: Component side

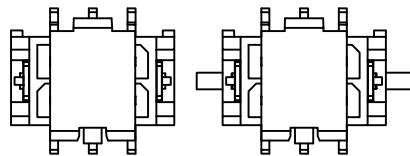

Shown with disposable cap

JIA YI ELECTRONIC CO., LTD

UNIT
mm

TITIE

CUSTOMER P.Number

J.Y NUMBER

REV.

DATE:2022/06/08

DRAWING.
You kai Yin

APPROVED
Nick

SCALE
NOT

CUSTOMER Name

DRAWN NO.

Page No

1 of 1

1

2

3

4

5

6

7

8