

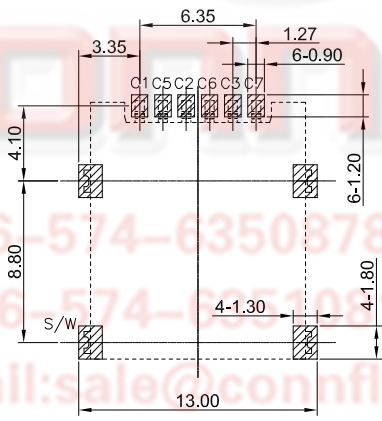
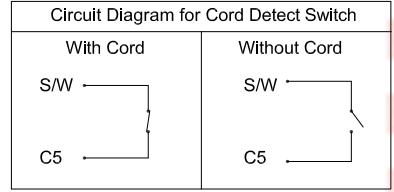



The information provided herein is from CONNPLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNPLY or its affiliates. Unauthorized use or reproduction of this document in any format or manner, CONNPLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

Dept	1	2	3	4	5	6	7	8
Qty								
DC	1							
ED	1							
IE	1							
ISO	1							
PD	1							
R&D	1							
SD	1							
QA	1							
QC	1							
QE	1							

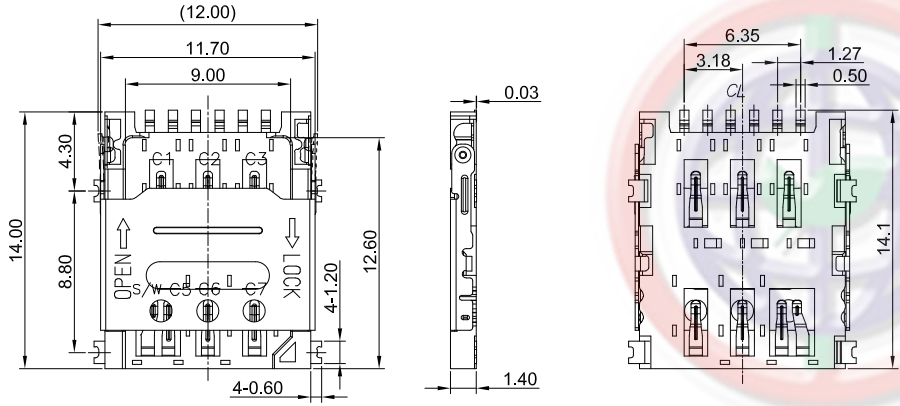

PIN NO.	PIN NAME
C1	VCC
C2	RST
C3	CLK
C4	N/A
C5	GND
P6	VPP
P7	I/O
S/W	Switch Pin



Notes:

- Material:**
 - Housing: High Temp., UL 94V-0 Color of Black.
 - Contacts: Copper Alloy.
 - Shell: Stainless Steel.
- Finish:**
 - Contact Area: Gold Over Nickel
 - Solder Area: Matte Tin.
- Specifications:**
 - Temperature Rated: -30°C TO +85°C
 - Contact Resistance: 100mΩ Max.
 - Insulation Resistance: 100MΩ Min.
 - Withstanding Voltage : 100V AC.
 - Current Rating : 0.5A.
- Product Number Code:**
 DS1138-17 - XX X X X X X X
 Packing Type
 R: Tape On Reel
 Shell Plating
 S: Stainless
 Housing Color
 B: Black
 Contact Plating
 0: Selective gold flash
 4: Selective 3u" gold
 Mounting Type
 S: SMT type
 Connector Type
 S: Socket
 NO. Of Contacts
 06:6Pin

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	NANO SIM CARD 6P SMT				
X.	±0.60	X.	±5°	UNITS	mm		Hinged Type H=1.4mm				
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1138-17 SERIES				
.XX	±0.25	.XX	±2°								
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNPLY CONNPLY ELECTRONIC CO. LTD							
SCALE		1:1						SHEET		1 OF 1	
DRAWING NO.		C-DS1138-17-XXXXXXX-A									