

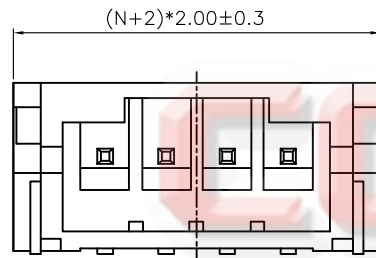
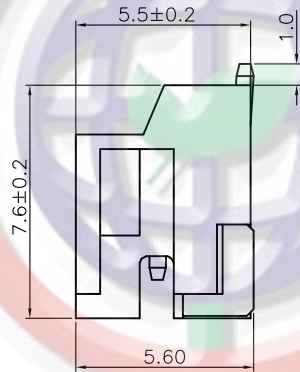


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 02/27/18'		

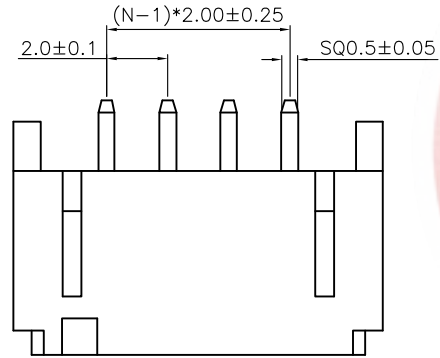

N=No. of contact

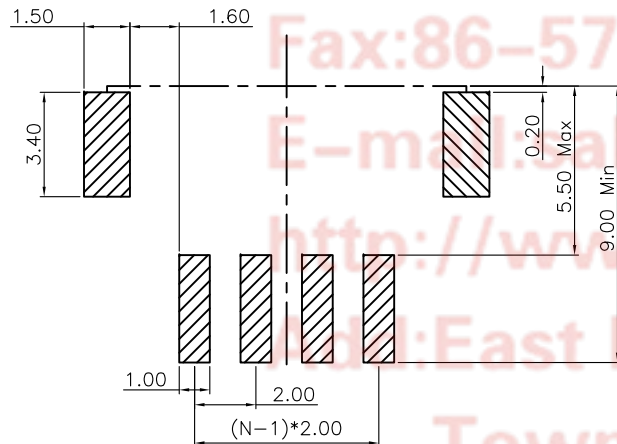

Recommend PCB Layout

NOTES:

1. MAIN SPECIFICATIONS
  - . Housing material: High Temp, Thermoplastic
  - . Rated voltage: 100V
  - . Rated current: 2A
  - . Contact resistance:  $\leq 30m\Omega$
  - . Insulation resistance:  $\geq 1000M\Omega$
  - . Withstanding voltage: 500V, AC 1 minute
  - . Temperature range:  $-25 \sim +85^{\circ}C$
  - . Recommend PC board thickness: 1.6mm

2. PRODUCT NUMBER CODE:

DS1066-08 - X X X X X X

- Packing type  
R: Tape on Reel  
B: Tube
- Contact Plating  
6: Tin
- Housing Color  
V: Ivory
- Mounting type  
S: SMT type
- Connector type  
M: Male
- No. of contact  
2 to 16

Tel:86-574-63508787  
 Fax:86-574-63510817  
 E-mail:sale@connfly.com  
 http://www.connfly.com  
 Add: East Industry Zone Chengde  
 Town Cixi Ningbo China  
 P.C:315333

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE
UNITS mm	P.C.B CONNECTOR 2.0mm R/A SMT TYPE
SHEET SIZE A4	SERIES DS1066-08 SERIES

DRAWING TYPE	CUSTOMER
SCALE	1:1 SHEET 1 OF 1
DRAWING NO.	C-DS1066-08-XXXX-A



晨翔电子有限公司

CONNFLY CONNFLY ELECTRONIC CO. LTD