

TST TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: ttsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Product Name: SAW Resonator 446 MHz SMD 5X5 mm

TST Parts No.: TC0504A

Customer Parts No.: _____

Customer signature required
Company: _____
Division: _____
Approved by : _____
Date: _____

Checked by: _____ Hongpu Lin *Hong Pu Lin*

Approval by: _____ Andy Yu *Andy Yu*

Date: _____ 2019/04/25

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.

TST TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: ttsales@mail.taisaw.com Web: www.taisaw.com

SAW Resonator 446 MHz

MODEL NO.: TC0504A

REV. NO.: 2.0

A. FEATURES:

1. 1-Port Resonator.

B. MAXIMUM RATING:

1. Input Power Level: 0 dBm
2. DC voltage: 5 V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -40°C to +85°C
5. Moisture Sensitive Level (MSL): Level 1


RoHS Compliant
Lead free
Lead-free soldering

C. ELECTRICAL CHARACTERISTICS:


Characteristic	Units	Minimum	Typical	Maximum
Center frequency Fr	MHz	445.925	446	446.075
Insertion Loss IL	dB	-	1.35	2.0
Equivalent Elements				
Motional capacitance C1	fF	-	1.54	-
Motional inductance L1	μH	-	82.59	-
Motional resistance R1	Ohm	-	15.72	-
Parallel capacitance Co	pF	-	3.36	-
Temp.coeff.	ppm/c*2	-	0.032	-
Turnover To	deg.C	-	25	-
Package size		SMD 5.0X5.0X1.4mm		

D. EQUIVIRENT CIRCUIT:

One-Port Resonator:

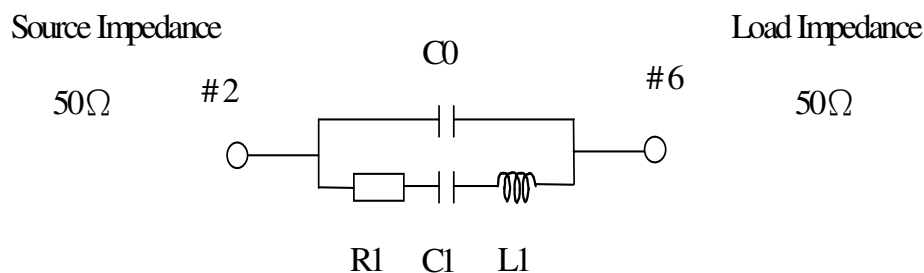

E. OUTLINE DRAWING:

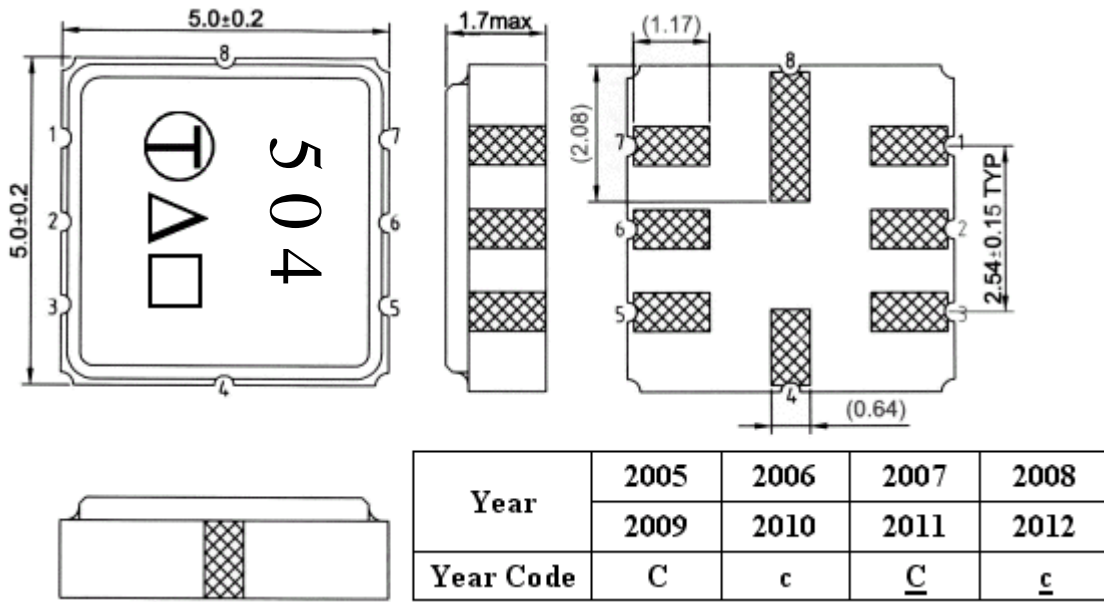

#2 : Input or Output

#6 : Output or Input

#4、8 : Case Ground

#1、3、5、7 : Ground


△ : Year Code

□ : Data Code(Follow the table provided by planer each year)


F. FREQUENCY CHARACTERISTICS



G. TEST CIRCUIT:


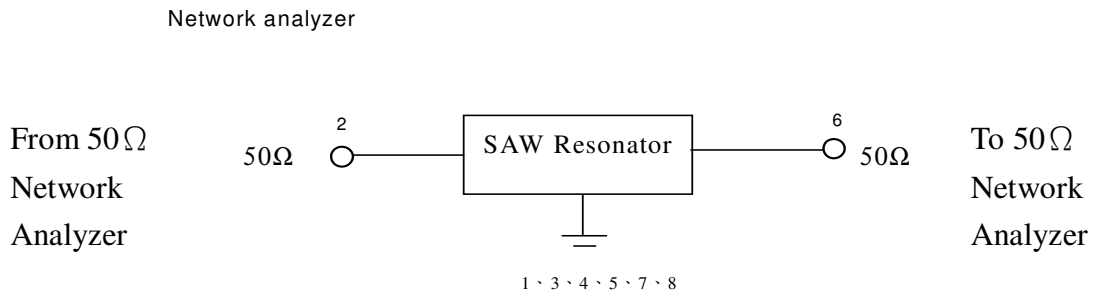


H. LAND PATTERN:

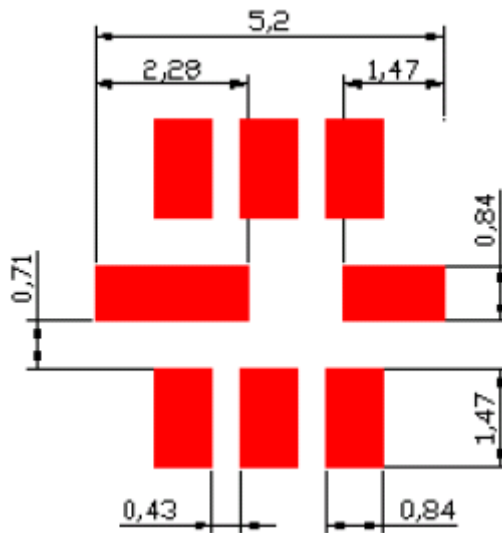


I. PACKING:

1. REEL DIMENSION

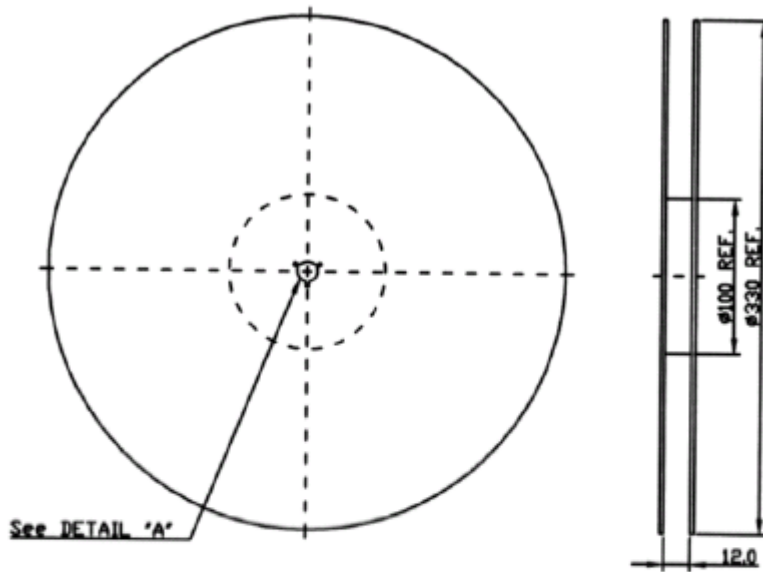

2. TAPE DIMENSION

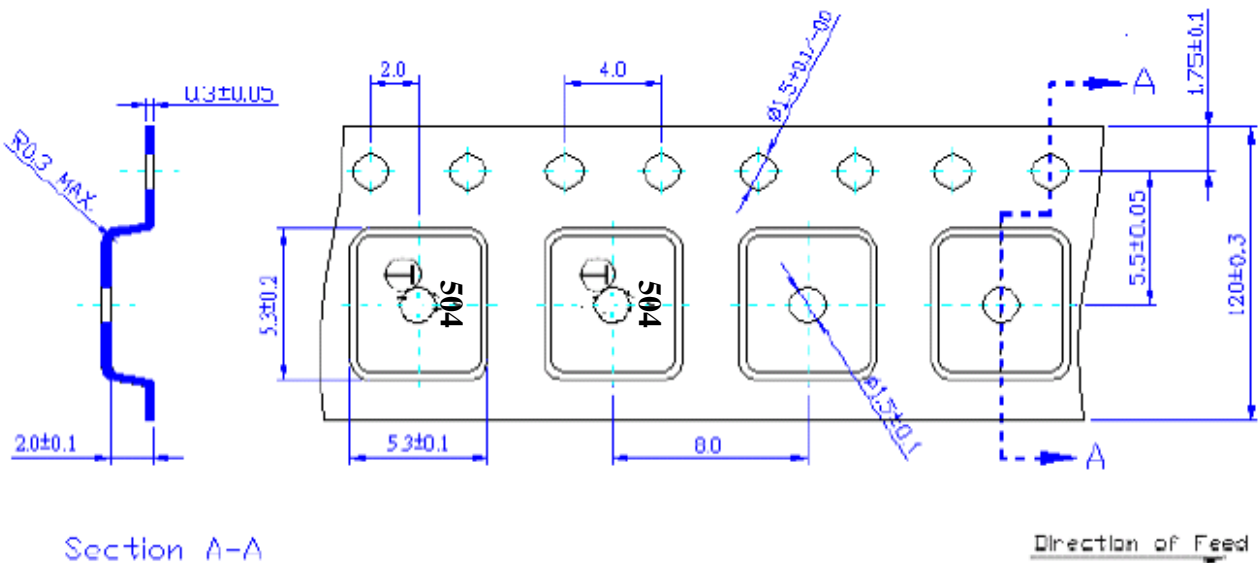

Section A-A

Direction of Feed

J. RECOMMENDED REFLOW PROFILE:

