

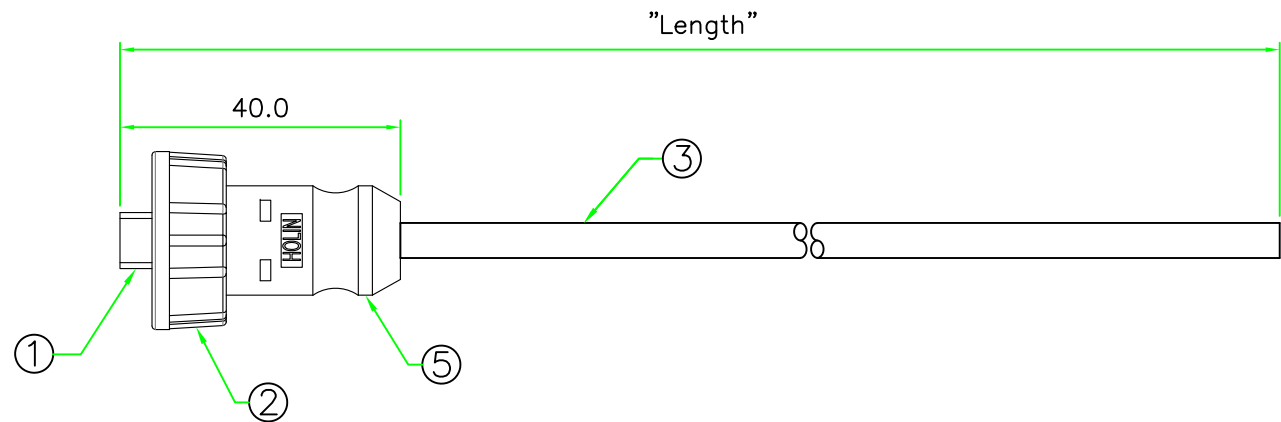



RoHS

REV	DESCRIPTION	DATE
A	ISSUE	JUN/24/2019

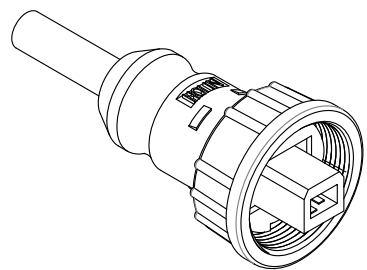

Wiring Diagram

- 1 ——— RED(24AWG) 紅
- 2 ——— WHITE(28AWG) 白
- 3 ——— GREEN(28AWG) 綠
- 4 ——— BLACK(24AWG) 黑
- SHELL ——— DRAIN 地線

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
5	OVERMOLD	PVC	BLACK	1	
4	GASKET	Rubber.	BLACK	1	
3	CABLE	UL2725 28AWGx1P+24AWGx2C+DRAIN+AL/MYLAR+BRAID	BLACK	1	
2	SCREW NUT	NYLON+GF.	BLACK	1	
1	CONNECTOR	USB 2.0 B Type Male Connector.	WHITE	1	

HOLIN[®] HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE : USB 2.0 B Type Male C Size Screw Type Molded Cable
SCALE	1:1	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 1.0 .XX ± 0.5 .XXX ± 0.25 ANGLE ± 1°		P/N: USB2BC-P4SN-xxM
REV. A	SHEET 1/1	DWG.NO: USB2BC-P4SN-xxM
		DR. JAMES CH. ERIC AP.