


Dept Qty  
 DC 1  
 ED 1  
 IE 1  
 ISO 1  
 PD 1  
 R&D 1  
 SD 1  
 QA 1  
 QC 1  
 QE 1

The information provided herein is from CONNPLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNPLY or its affiliates. Unauthorized use or modification is strictly prohibited. CONNPLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.



**NOTES:**

**1. SPECIFICATIONS**

- . Switch Function: Single Pole Single Throw
- . Contact Rating: 100mA at 12Vdc
- . Insulation Resistance: 100MΩ min.
- . Contact Resistance: 80mΩ max.
- . Operating Life: 50,000 cycles
- . Travel: 0.2±0.05mm
- . Operation Temperature Range: -30°C to +85°C

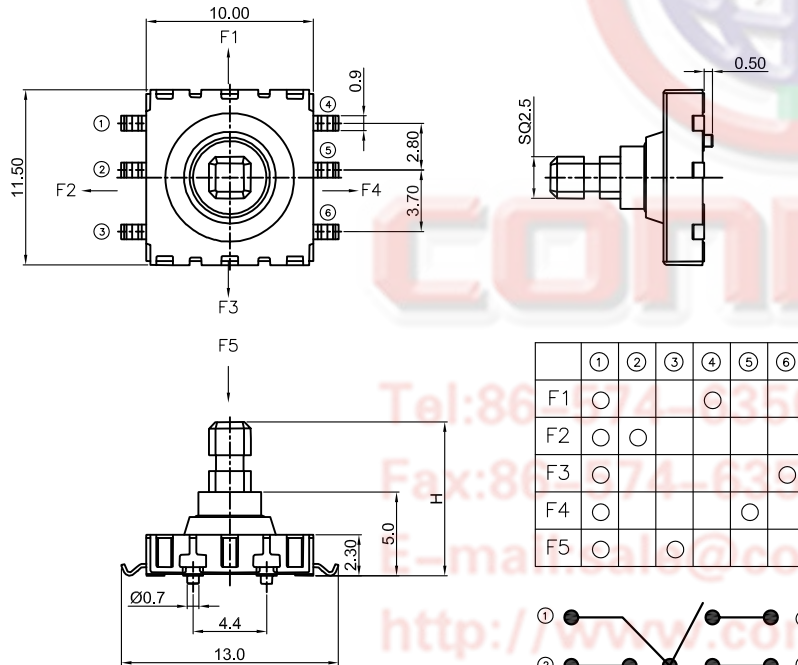


	①	②	③	④	⑤	⑥
F1	○					
F2	○	○				
F3	○				○	
F4	○				○	
F5	○		○			



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 05/12/18'		

. Wave Soldering: Recommended Solder Temperature At 500°F(260°C)max. 5 Seconds, Subject To PCB 1.6mm Thickness.

**2. PRODUCT NUMBER CODE:**

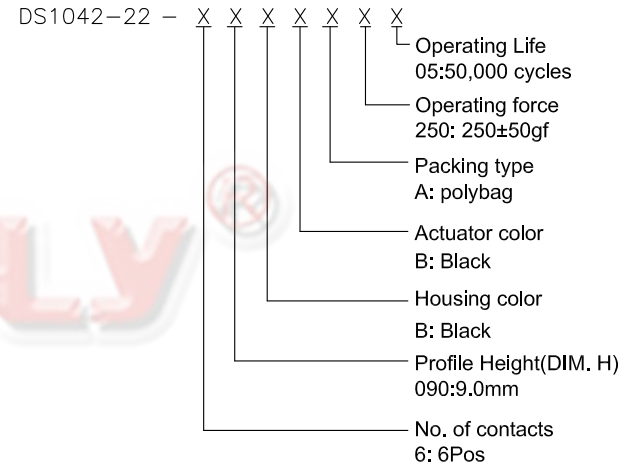

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	10.0*10.5mm
X.	±0.60	X.	±5°	UNITS	mm	Multifunctional Switch SMT Type	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1042-22 SERIES
.XX	±0.25	.XX	±2°	<b>晨翔电子有限公司</b> <b>CONNPLY CONNPLY ELECTRONIC CO. LTD</b>			
DRAWING TYPE		CUSTOMER					
SCALE		1:1	SHEET 1 OF 1				
DRAWING NO.		C-DS1042-22-XXXXX-A					