

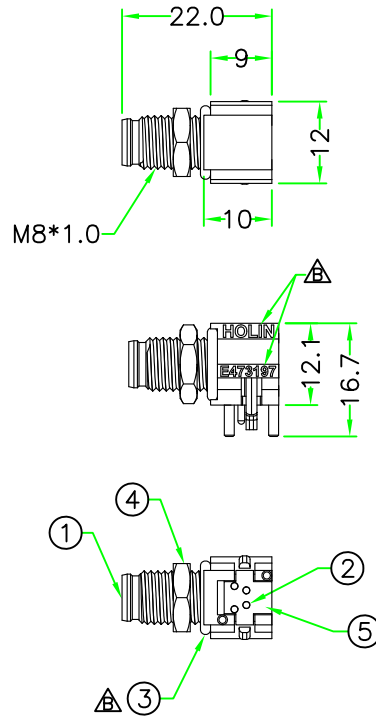
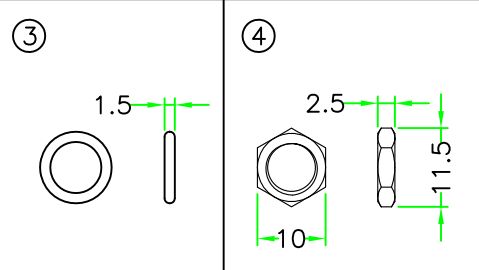





RoHS IP66~68

REV.	DESCRIPTION	DATE
A	ISSUE	Jun/09/2014
B	Change material and add UL label.	Jan/27/2015

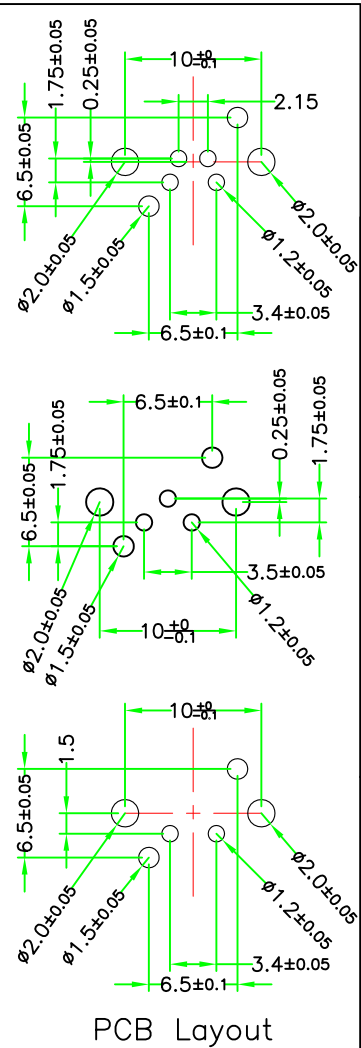

△ LABEL of contents :

E473197
A08D-P1xxHPRR
Rating : 60 V AC/DC , 3 A
CAUTION:
NOT FOR INTERRUPTING CURRENT
ATTENTION:
NE PAS UTILISER POUR COUPER LE COURANT

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
6	GLUE	EPOXY.	BLACK	1	
5	PIN STAND	NYLON+GF.	BLACK	1	
4	HEX NUT	BRASS. Nickel Plated.		1	
3	O-RING	SILICON. △	B.BLUE	1	
2	CONTACT	BRASS, Male Pin. 6u" Gold Plated.		N	
1	CONNECTOR	M8 A-Coding Male R/A Connector Insert. Nylon+GF.	BLACK	1	

HOLIN ® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司	
 UNIT: mm SCALE 1:1	TITLE : M8 A-Coding 2~4 Pin Male R/A PCB Mount Connector
UNLESS OTHERWISE SPECIFIED TOLERANCES: x ±0.25 xx ±0.1 xxx ±0.05 ANGLE ± 1°X REV. B SHEET 1/1	P/N: A08D-P1xxHPRR DWG.NO: A08D-P1xxHPRR DR. JACK CH. ERIC AP.