

VR xx 51x 3 xxxx G

- 02 2 Poles
 - 03 3 Poles
 -
 - 24 24 Poles
- Color**
- 0 Black (RAL9005)
 - 2 Red (RAL3001/D)
 - 3 Orange(RAL2011/P)
 - 4 Yellow(RAL1018/A)
 - 5 Green(RAL6018/T)
 - 6 Blue (RAL5015/A)
 - 8 Grey(RAL7035/D)
 - 9 White(RAL1102)
 - C Green(RAL6018/U)
- G** RoHS compliant (lead<4%) In copper Alloy
- 0000 Standard @ Logo
 - 000A Standard ANY Logo
 - Any special item by customer request, please contact sales department.

SIGN	DATE	DESCRIPTION	APPROVER
△	2009.12.28	Add UL standard	Jacke
△	2010.05.24	The design is changed	Jacke
△	03/09-15	The design is changed & update the drawing	Evan



THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material


- Item① Terminal body:Thermoplastic (UL94V-0)
- Item② Terminal cover:Thermoplastic (UL94V-0)
- Item③ Clamp:Brass, Ni plated
- Item④ Female contact: PhBz ,Bright Tin plated over Nickel plated
- Item⑤ Terminal screw :Steel Cr3+ Zinc plating "-" slot type
- Item⑥ With flange screw : steel M2.5 Zinc plating "+/-" slot type

Electrical

- Voltage rating: 300VAC
- Current rating: 10A
- Wire range:
- Solid wire(AWG): 14-30
- Stranded wire(AWG): 14-30
- Torque(Lb-In): 2
- Screw: M2
- Wire strip length: 7-8mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- △ ● Safety Approval:

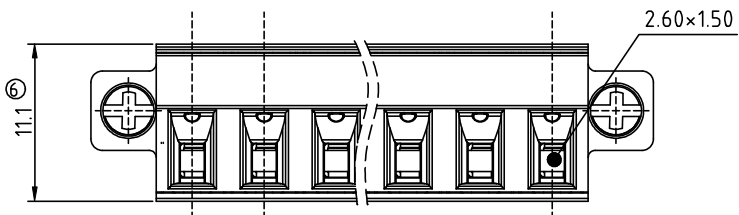

SECTION A-A

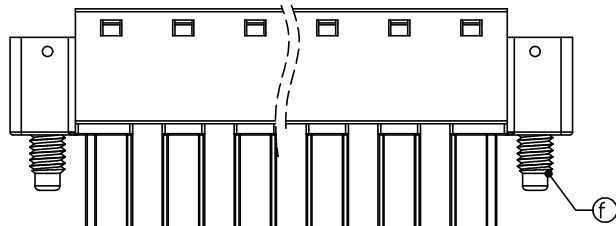

Dimension

DIM A	N×5.08
DIM B	(N-1)×5.08
DIM C	(N+1)×5.08+4.12

N=Number of poles



POLES	TOL
2p-5p	±0.15
6p-9p	±0.20
10p-13p	±0.30
14p-17p	±0.35
18p-24p	±0.40

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		VR 5.08 Series With flange (Contact on up side)				
PART NO.		VRxx51x3xxxxG		DWG NO.		8VR0004
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance
		Evan	Evan			X. ±0.50
		04/22-15	04/22-15			UNIT: mm
				SHEET: 01/01		X.XX ±0.10
				REV.: E		X° ±1°