

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8





REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 12/01/17'		

NOTES:

- 1. SPECIFICATIONS**
- . Contact Rating: 100mA at 30Vdc
 - . Insulation Resistance: 100MΩ min.
 - . Contact Resistance: 100mΩ max.
 - . Dielectric Withstanding Voltage: 250V AC(rms) for 1 minute.
 - . Operating Life: 10,000 cycles
 - . Travel: 1.5±0.3mm
 - . Operation Temperature Range: -25°C to +70°C

- . Wave Soldering: Recommended Solder Temperature At 500°f(260°C)max. 5 Seconds
- . Hand Soldering: Use Soldering Iron Of 30 Watts, Controlled At 608°f(320°C) Approximately 2 Seconds.

2. PRODUCT NUMBER CODE:

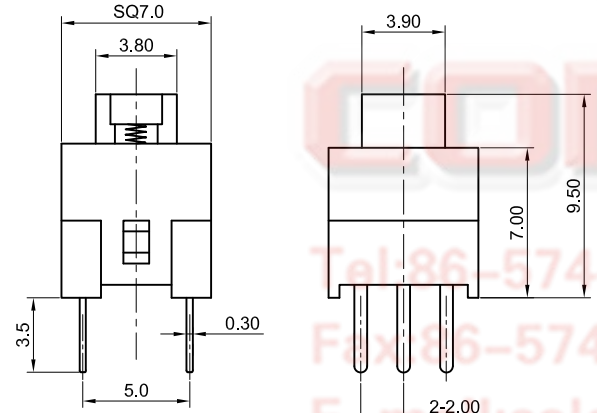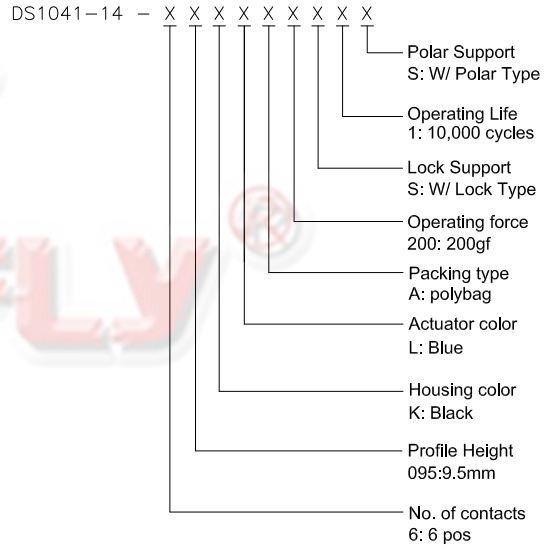

Tel: 86-574-63508787
 Fax: 86-574-63510817
 E-mail: sale@connfly.com
 http://www.connfly.com
 No. 1 East Industry Zone KuangYan
 Town Cixi Ningbo China
 P: 0574-5333

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	7.0*7.0*9.5mm Tact Switch V/T 6 Positions W/ Lock & W/ Polar Type		
X.	±0.60	X.	±5°	UNITS	mm	SHEET SIZE	A4	SERIES	DS1041-14 SERIES
.X	±0.38	.X	±3°	晨翔电子有限公司 CONNFLY CONNELY ELECTRONIC CO. LTD					
.XX	±0.25	.XX	±2°						
DRAWING TYPE		CUSTOMER		SCALE					
SCALE		1:1	SHEET		1 OF 1				
DRAWING NO.		C-DS1041-14-XXXXXXXXXX-A							

1 2 3 4 5 6 7 8