
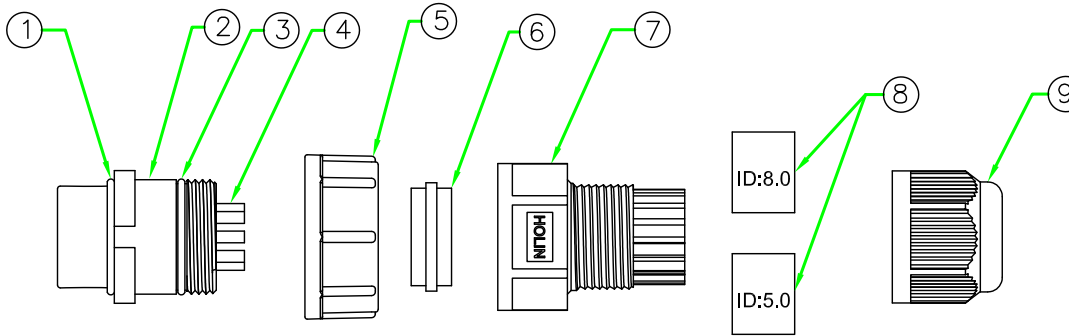

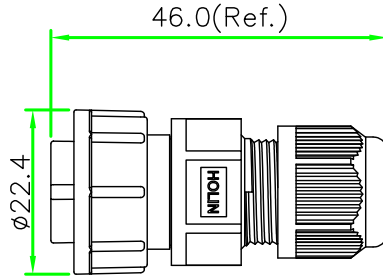



RoHS

IP66~68



REV.	DESCRIPTION	DATE
A	ISSUE	Apr/24/2015

NOTES:



- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 5A / 10A / 20A
CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE

2. HOW TO ORDER: CCx-L4xxSA


- 03 - 3 PIN
- 05 - 5 PIN
- 09 - 9 PIN

- D - CURRENT RATING 5A
- P - CURRENT RATING 10A
- G - CURRENT RATING 20A


#2 Zipper PE Bag.

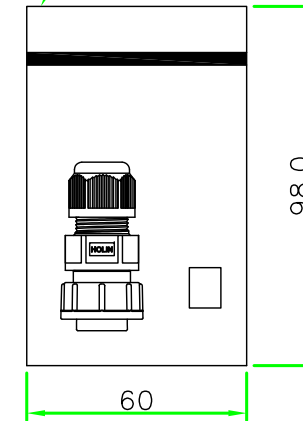

CCG-L403SA



CCP-L405SA



CCD-L409SA

PIN ASSIGNMENT FRONT VIEW
(前視圖)

9	CLAMP NUT	NYLON+GF.	BLACK	1	
8	TUBE	Rubber (ID= 5.0 & 8.0mm)	BLACK	2	
7	HOOD	NYLON.	BLACK	1	
6	GASKET	Rubber	BLACK	1	
5	LOCK NUT	NYLON+GF.	BLACK	1	
4	CONTACT	Brass ,Male Pin. 6u"Gold Plated.		N	
3	O-RING	NBR.	BLACK	1	
2	CONNECTOR	C Size Female Connector Insert, NYLON+GF.	BLACK	1	
1	O-RING	NBR.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE :	Circular C Size Lock Type Female connector Male Pin Field Installable Plug
SCALE	1:1	P/N:	CCx-L4xxSA
UNLESS OTHERWISE SPECIFIED TOLERANCES: .x ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1'	ANGLE ± 1'	DWG.NO:	CCx-L4xxSA
REV. A	SHEET 1/1		
		DR. Patty	
		CH. ERIC	
		AP.	