

TFT DISPLAY SPECIFICATION



RAYSTAR

RAYSTAR Optronics, Inc.
曜凌光電股份有限公司



曜凌光電股份有限公司 Raystar Optronics, Inc.

T: +886-4-2565-0761 | F: +886-4-2565-0760

salescontact@raystar-optronics.com | www.raystar-optronics.com

RFM08400A-AWW-LNN

General Specifications

- Screen Diagonal: 8.4 inch
- Number of Pixels: 1024 x 3(BGR) x 768 dots
- Module dimension: 199.5 x 149.0 x 11.5 mm
- Active area: 170.8032 (H) x 128.1024(V) mm
- Pixel pitch: 0.1668 × 0.1668 mm
- Display Mode: Normally Black , Transmissive
- Viewing Angle: 80/80/80/80 (IPS)
- Drive IC: ST5821AH+ST5084AA
- Interface: LVDS
- Backlight Type: LED, Normally White
- Aspect Ratio: 4:3
- Side screw torque : Typ:0.9 Max:1.3 (Unit,Kgf-cm)
- Touch Panel: Without Touch Panel
- Surface: Anti-Glare

Interface


LCM PIN Definition


Pin No.	Symbol	Function
1	VDD	Power supply
2	VDD	Power supply
3	GND	Ground
4	GND	Ground
5	Link0-	0- LVDS differential data input (D0N)
6	Link0+	0+ LVDS differential data input (D0P)
7	GND	Ground
8	Link1-	1- LVDS differential data input (D1N)
9	Link1+	1+ LVDS differential data input (D1P)
10	GND	Ground
11	Link2-	2- LVDS differential data input (D2N)
12	Link2+	2+ LVDS differential data input (D2P)
13	GND	Ground
14	CLKIN-	- LVDS differential clock input (CLKN)
15	CLKIN+	+ LVDS differential clock input (CLKP)
16	GND	Ground
17	Link3-	3- LVDS differential data input (D3N)
18	Link3+	3+ LVDS differential data input (D3P)
19	MODE	Bit 6/8:Low(6 Bit);High(8 Bit)
20	SC	Scan direction selector (Low: Normal ;High: Reverse)

CN2

Pin No.	Symbol	Function
1	NC	No connection
2	NC	No connection
3	LED C1	LED_ Cathode 1
4	LED A1	LED_ Anode 1
5	LED A2	LED_ Anode 2
6	LED C2	LED_ Cathode 2

Contour Drawing

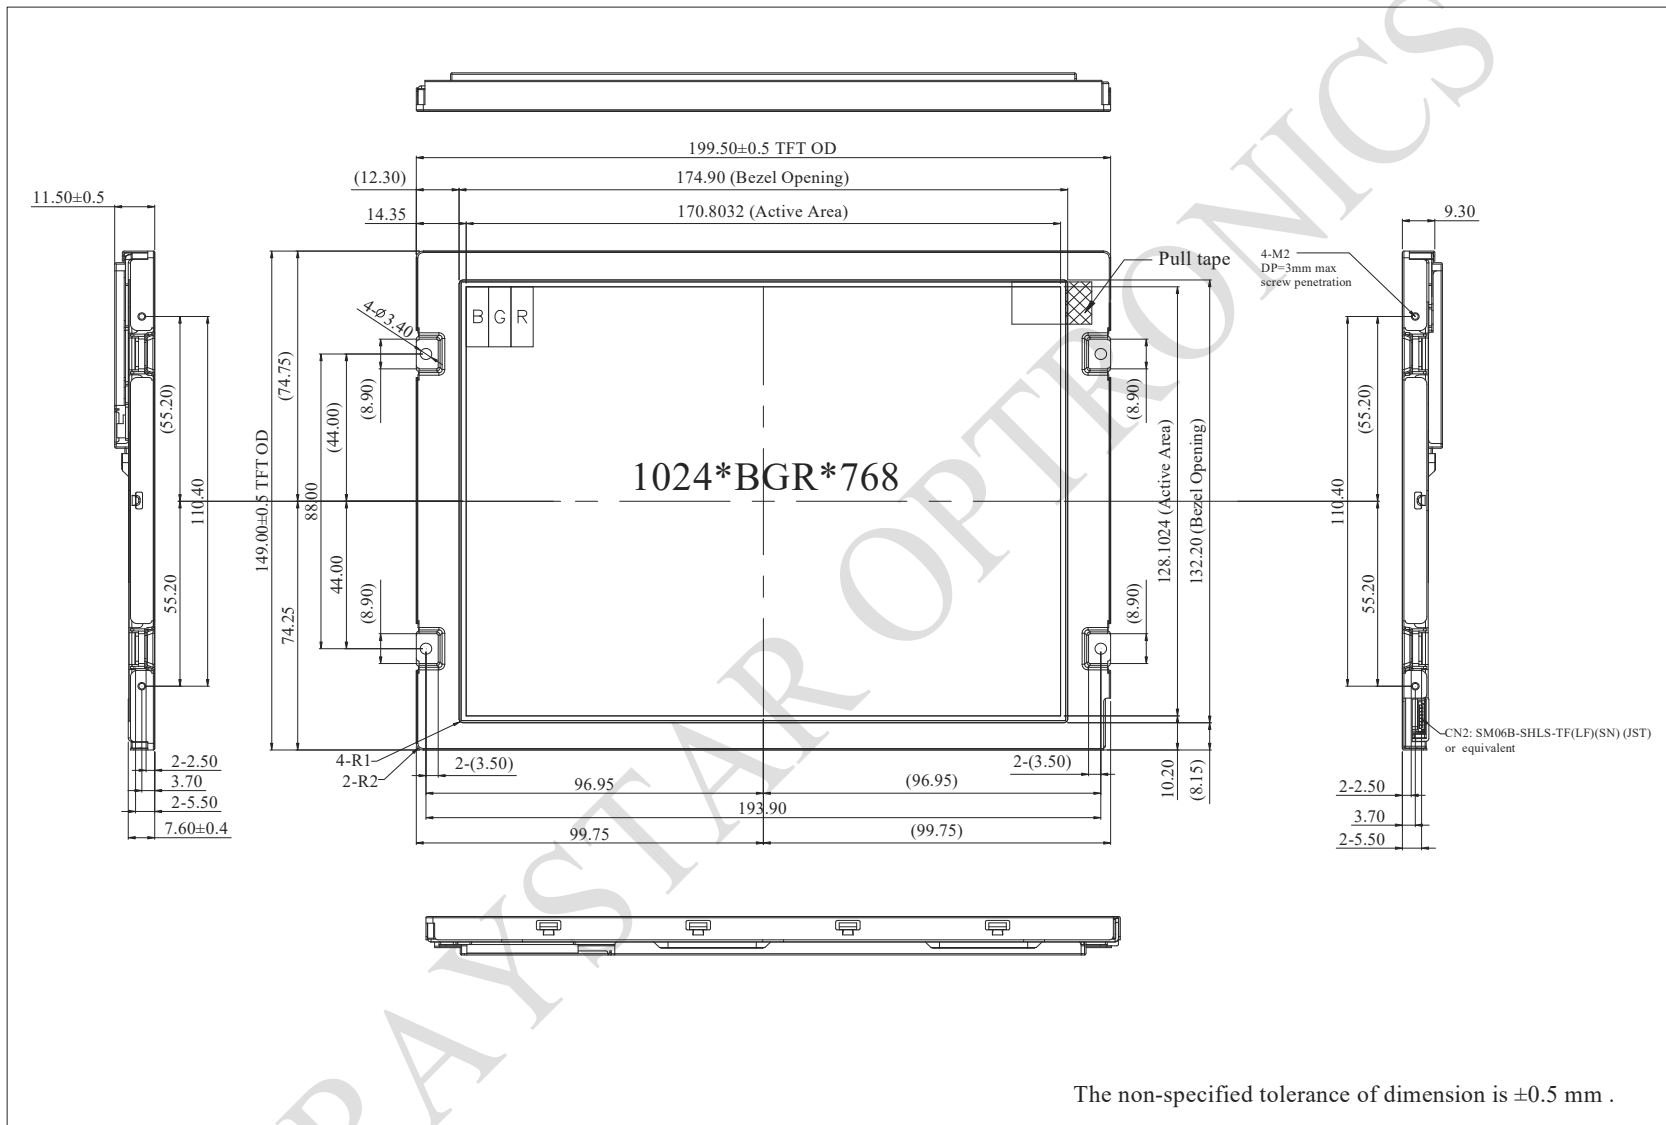

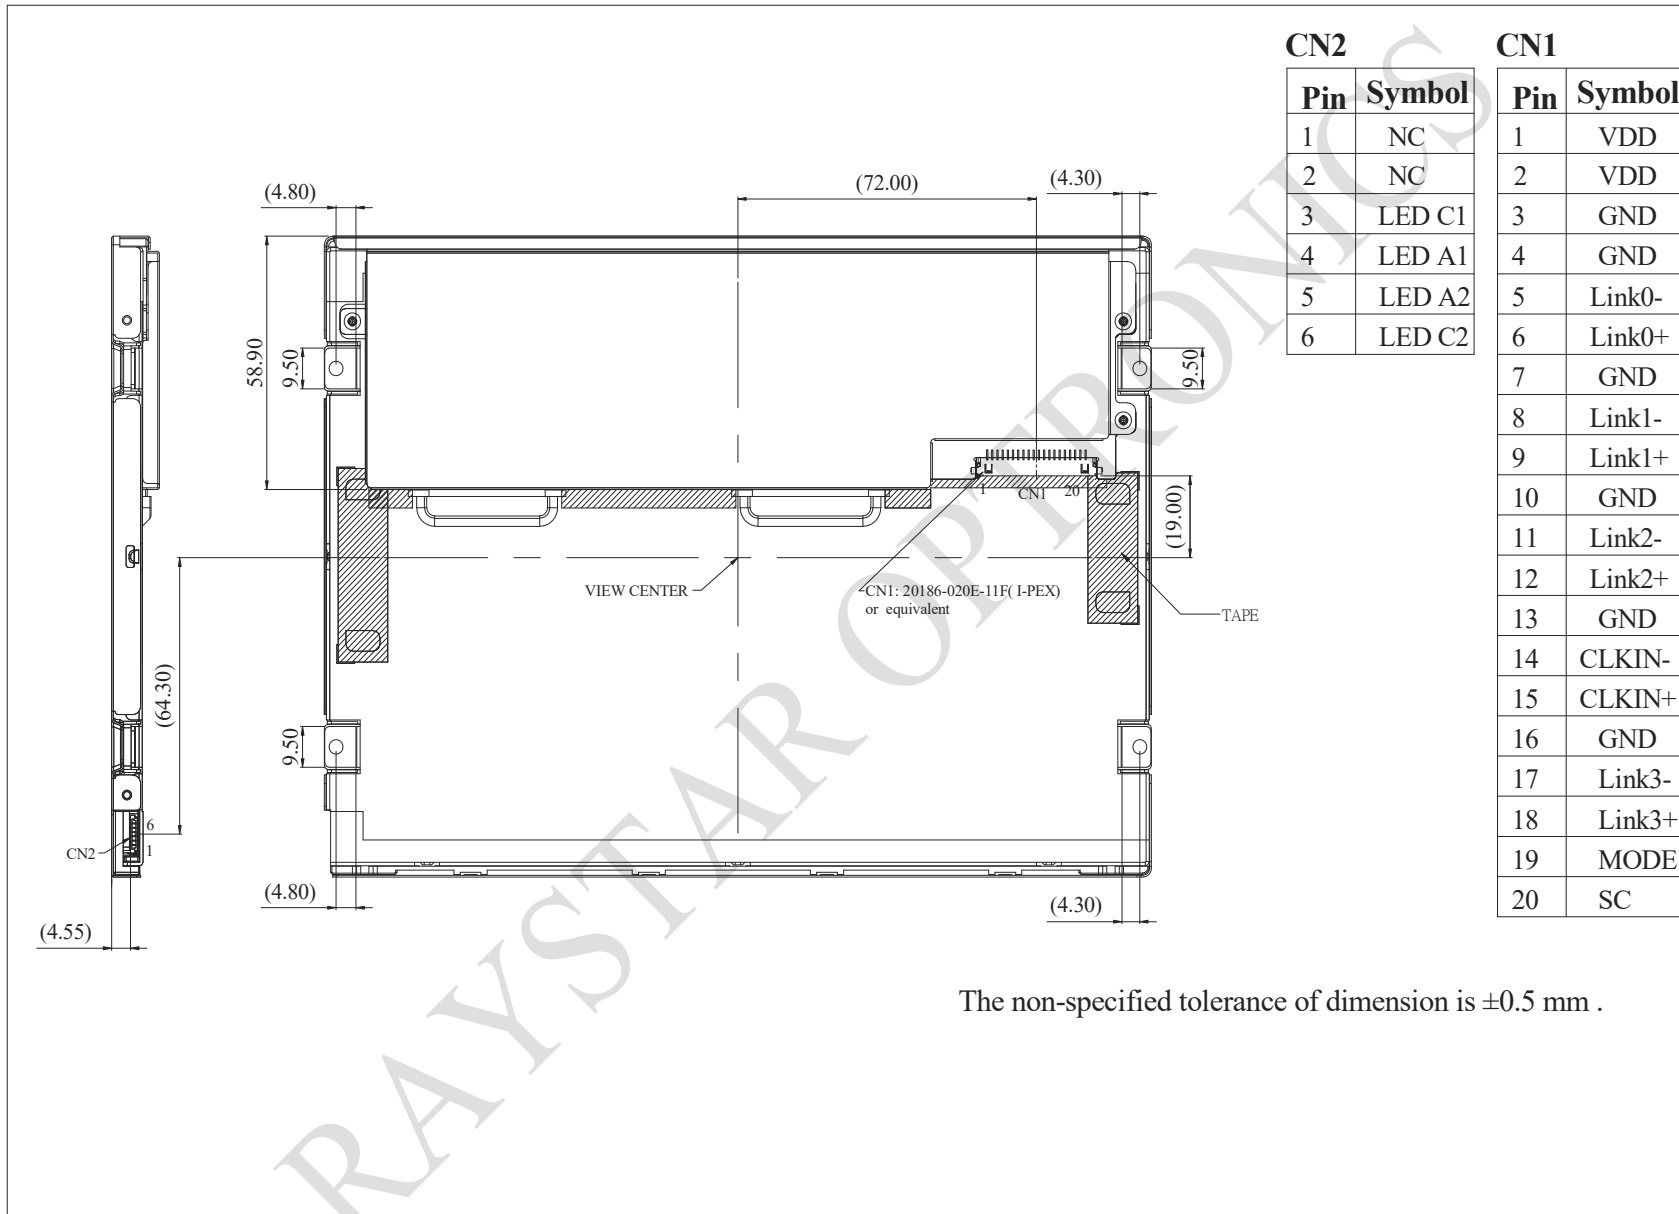

Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	-30	—	+80	°C
Storage Temperature	TST	-30	—	+80	°C

Electrical Characteristics

Operating conditions:

Item		Symbol	Min	Typ	Max	Unit
Supply Voltage For Logic		V_{DD}	3.0	3.3	3.6	V
Power Supply For Current		$V_{DD}=3.3V$	—	330	495	mA
Input Voltage	H level	V_{IH}	$0.7V_{DD}$	—	V_{DD}	V
	L Level	V_{IL}	GND	—	$0.3V_{DD}$	V