


SIGN	DATE	DESCRIPTION	APPROVER
△	01/07'09	APPROVAL:cULus	Kind
△	01/07'09	Wire range changed from 22-10.AWG to 22-12AWG.	Kind
△	01/07'09	Temperature changed from -40~105°C to -40~115°C	Kind
△	09.04.08	Torque is changed	Jody
△	09/28`11	PART NO is changed	Chen Bo
△	09/28`11	The Dimension 6.5 are added	Chen Bo
△	10/27'12	Change the screw plating specification	Jacky
△	10/27'12	Change the electrical specification	Jacky
△	03/18'13	Update the drawing	Jacky

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

MATERIALS ELECTRICAL
 RATED VOLTAGE & CURRENT: 300 V, 30 A
 WITHSTAND VOLTAGE: AC 2000 V/Min
 INSULATION RESISTANCE: 1000 MΩ OR MORE AT DC 500 V
 △ OPERATING TEMPERATURE RANG: -40 °C ~ +115 °C
 △△△ SCREW TORQUE VALUE: 9.5Lb-In.
 △△△ WIRE RANGE: 22-10AWG str/sol
 1) MOLDED PARTS: Thermoplastic, UL 94 V-0 BLACK
 2) TERMINAL: BRASS, 0.8t, Tin PLATED
 △ 3) TERMINAL SCREWS: STEEL, M4
 △ APPROVAL: Critical dimension: ▽

YK 552 xx 0 x x 00 G △
 G:RoHS compliant(lead<4% in copper alloy)
 MARK
 0: "@ " MARK
 1: "ANY " MARK
 TERMINAL & SCREW PLATED
 0: TERMINAL & SCREW: G/F
 △ 1: TERMINAL: G/F, SCREW: Zinc
 2: TERMINAL: Sn, SCREW: G/F
 △ 3: TERMINAL: Sn, SCREW: Zinc

NO. OF POLES
 02: 2 POLES
 03: 3 POLES
 04: 4 POLES
 :
 30: 30 POLES

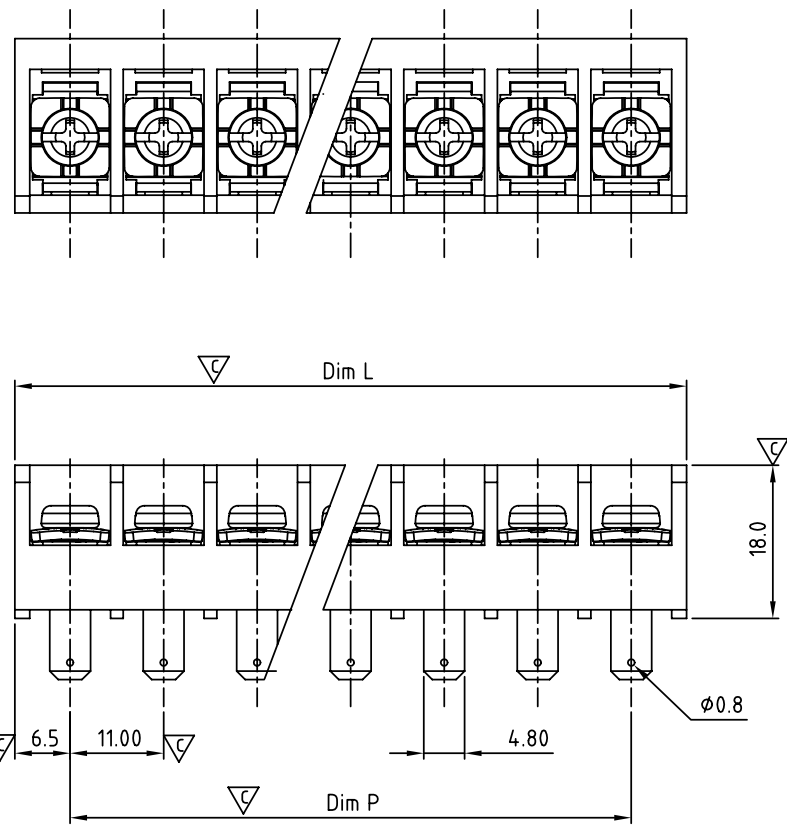

DIM		TOL				
		2P-4P	5P-8P	9P-16P	17P-23P	24P-30P
Dim L	(N-1)×11.0+13.0	±0.30	±0.40	±0.50	±0.60	±0.80
Dim P	(N-1)×11.0	±0.30	±0.40	±0.50	±0.60	±0.80

ANYTEK				CUSTOMER COPY			
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD							
TITLE	YK-552 Series			DWG NO.	8YK0001-552		
PART NO.	YK552xx0xx00G △			CUST NO.			
APPROVED	CHECKED	DESIGNED	DRAWN				
		Jacky 2013.03.18	Jacky 2013.03.18				
				UNIT: mm	Tolerance		
				SCALE: NONE	X. ±0.50		
				SHEET: 01/01	X.X ±0.30		
				REV.: G	X.XX ±0.10		
					X° ±1°		