


SECTION P-P

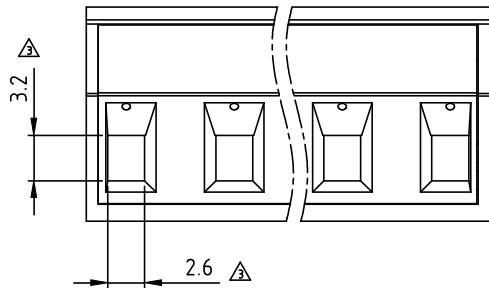

N = Number of poles
 Dim A=(N-1)X7.62+5.62
 Dim B=(N-1)x7.62

Poles	Tolerance
2p-6p	±0.15
7p-12p	±0.20
13p-16p	±0.30

SIGN	DATE	DESCRIPTION	APPROVER
△	2006.01.20	The design of screw hole is changed	Marvin
△	2010.03.11	Add the 2P mark	Jacke
△	2011.08.09	The dimensions 2.6 & 3.2 & 0.9 & 5.8 are added	Aaron
△	2014.02.25	update the drawing	Chen Bo
△	07/28-15	update the drawing	Evan

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

- Item ① Clamp: Brass(CuZn) Ni plated
- Item ② Terminal screw: Steel Zinc plating "-" slot type
- Item ③ Female contact: PhBz ,Bright Tin plated over Nickel plated
- Item ④ Terminal Cover: Thermoplastic (UL94V-0)
- Item ⑤ Terminal housing: Thermoplastic (UL94V-0)

Electrical cULus

- Voltage rating: 300VAC
- Current rating: 20A
- Wire range:
- Solid wire(AWG): 12-24
- Stranded wire(AWG): 12-24
- Torque: 5Lb-In
- Screw: M3
- Wire strip length: 7-8mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Safety Approval:
- Critical dimension: ▽

△ TJ xx 01 x 0 xxxx G

		Color	G RoHS compliant (lead<4%) In copper Alloy
02	2 Poles	0 Black (RAL9005)	0000 Standard @ Logo
03	3 Poles	2 Red (RAL3001/D)	000A Standard ANY Logo
...	...	3 Orange(RAL2011/P)	0091 Standard ANY Logo
16	16 Poles	4 Yellow(RAL1018/A)	Any special item by customer request, please contact sales department.
		5 Green(RAL6018/T)	
		6 Blue (RAL5015/A)	
		8 Grey(RAL7035/D)	
		9 White(RAL1102)	
		C Green(RAL6018/U)	

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		TJ-7.62mm Series 2P-16P (Without flange)			
PART NO.		DWG NO.	8TJ0401		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance
		Evan 07/28-15	Chen Bo 02/25-14		X. ±0.50
				UNIT: mm	X.X ±0.30
				SCALE: NONE	X.XX ±0.10
				SHEET: 01/01	X° ±1°
				REV.: F	