

**RoHS**

**Features:**

Available in 2 thru 12 circuits

Material: UL 94V-0 nylon

Standard color: Black

**Specifications:**

Current rating:

Wire size	# 20	# 22	# 24	# 26	# 28	# 30
Ampere	5 A	5 A	4 A	3 A	2 A	1 A





Voltage rating: 250V AC(RMS) or DC

Insulation resistance: 1000mΩ min.

Dielectric strength: 1500V AC/minute

Temperature rise: 30°C max.

(carry rated current load)

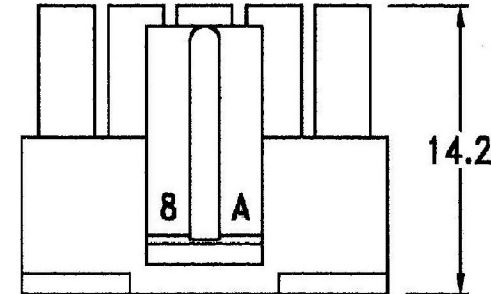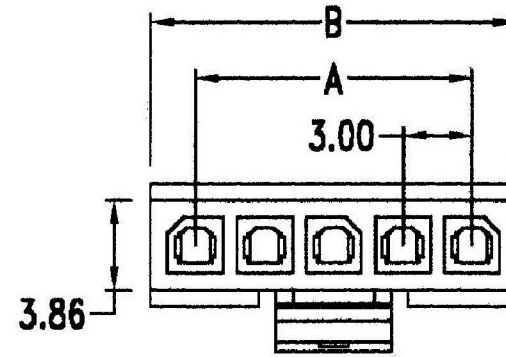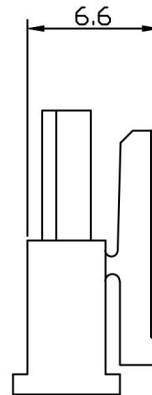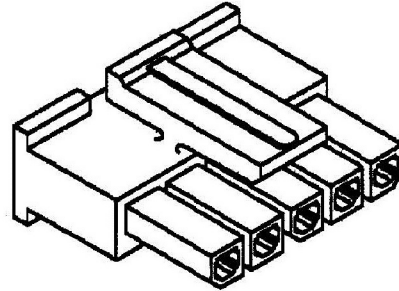

REV	DATE	DETAILS

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	3.0	7.0	4	9.0	13.0	6	15.0	19.0
3	6.0	10.0	5	12.0	16.0	7	18.0	22.0

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
8	21.0	25.0	10	27.0	31.0	12	33.0	37.0
9	24.0	28.0	11	30.0	34.0			

**HOW TO ORDER**

**SH3002 - H - S - XX**

1      2      3      4

- 1. Series No.: SH3002
- 2. Product: H:Housing
- 3. Row Type: S:Single Row  
D: Dual Row
- 4. Contact No.: 02~12(Single Row)  
02~24(Dual Row)

**JIA YI ELECTRONIC CO., LTD**

APPROVED	CHECKED	DRAWN BY	UNIT	TOLARANCE	ITEM NUMBER	PART NAME	REV
NICK	ERIC	JACK	mm	X.± 0.5	SH3002-H-S-XX	3.0mm Pitch Housing Single Row	PAGE NO 1 / 1
			SCALE	.X ± 0.3			
				.XX ± 0.2			
			NOT	.XX ± 0.1			