

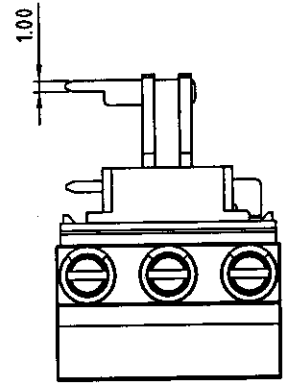
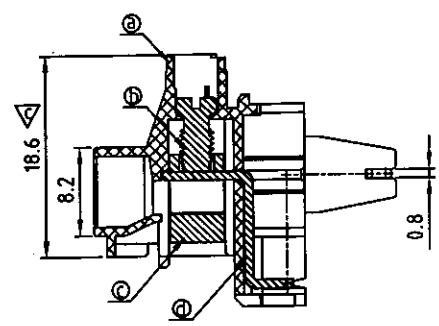


1	2	3	4	5	6	7
SIGN	DATE	DESCRIPTION			APPROVER	
△		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

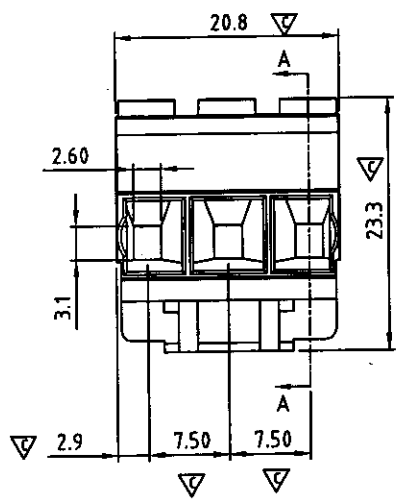

- Materials**
- Item a Terminal body: Thermoplastic (UL 94V-0)
 - Item b Terminal screw: Steel Zinc plating "-" slot type
 - Item c Clamp: Zinc alloy . Ni plated
 - Item d Long wire guard solder pin: Brass .Tin plated
 - Item e Center wire guard solder pin: Brass .Tin plated
 - Item f Short Wire guard solder pin: Brass .Tin plated


- Electrical cULus**
- Voltage rating: 600VAC
 - Current rating: 20A
 - Wire range:
 - Solid wire(AWG): 12-30
 - Stranded wire(AWG): 12-30
 - Torque(Lb-In): 4.3
 - Screw: M3
 - Wire strip length: 7-8mm
 - Withstanding Voltage: 2.2KV
 - Operating temperature: -40°C to +115°C
 - Soldering temperature: 250°C±5°C/5 Sec
 - Safety Approval:
 - Critical dimension: ▽

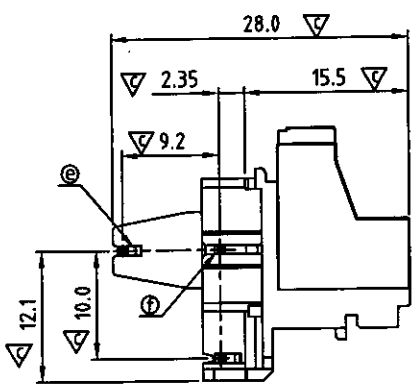

K7 03 03 x 1 xxxx G

- G: Pb<40000ppm
- COLOR
- 0000: "@" Logo (Standard)
 - 000A: "ANYTEK" Mark
- Any special item by customer request, please contact sales department.

- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7035/D)

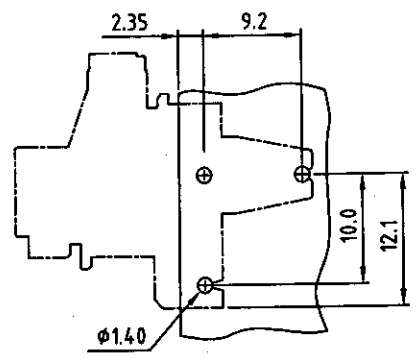

PCB Layout

ANYTEK				CUSTOMER COPY				
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD								
TITLE	K7 7.5 SERIES 3P (Left)			DWG NO.	8K70002			
PART NO.	K70303x1xxxxG			CUST NO.				
APPROVED	CHECKED	DESIGNED	DRAWN	Tolerance				
[Signature]		Runner	Runner	UNIT: mm	X.	±0.5		
		2010.11.09	2010.11.09		SCALE: NONE	X.X	±0.3	
					SHEET: 01/01	X.XX	±0.1	
				REV: B	X*	±1°		