

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 09/04/08'	~	LJC 09/04/08'
B	HOUSING CHANGE	JLZ 07/06/15'	~	

NOTES:



- MATERIAL
  - INSULATOR:THERMOPLASTIC(UL 94V-0).
  - CONTACT MATERIAL:COPPER ALLOY.
- SPECIFICATION
  - CURRENT RATING:1.0 Amp.
  - INSULATION RESISTANCE:1000MΩ Min.
  - DIELECTRIC WITHSTANDING:300VAC.
  - CONTACT RESISTANCE:20mΩ Max.
  - OPERATING TEMPERATURE:-40°C TO+105°C.

3. PART NUMBER: DS1064-15


4. PRODUCT NUMBER CODE:

DS1064-15 - X X X X X - X

- PLATING LEVEL  
3A: 3A LEVEL
- PACKING TYPE  
A: POLYBAG  
B: TUBE
- HOUSING COLOR  
B:BLACK
- CONTACT PLATING  
8: FULL GOLD FLASH  
6: FULL TIN
- MOUNTING TYPE  
V: STRAIGHT TYPE
- No.OF CONTACTS  
06 ~ 40

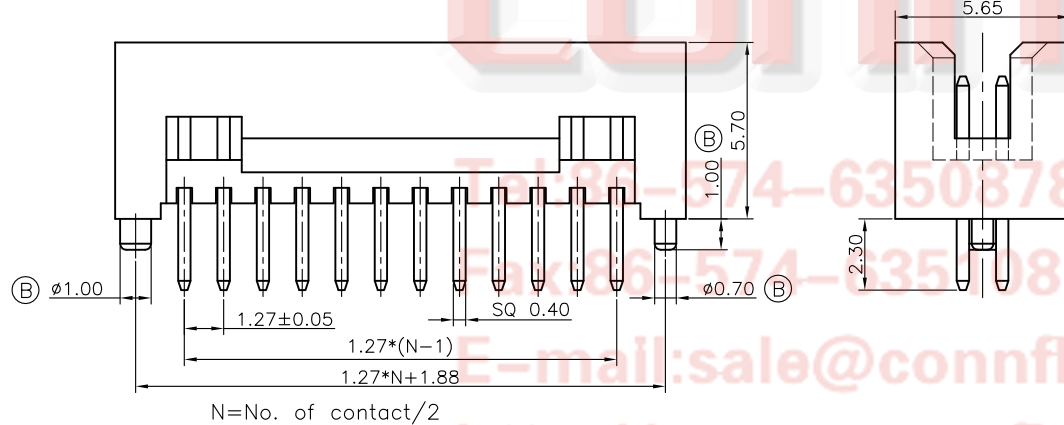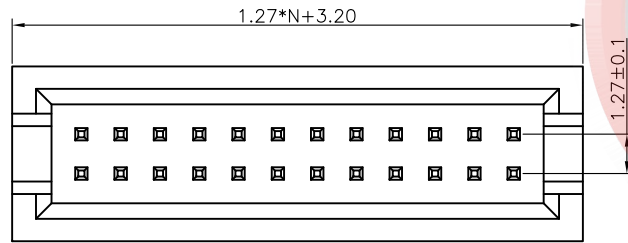

N=No. of contact/2

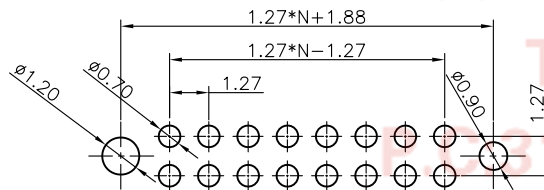

RECOMMEND PCB LAYOUT  
(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	BOX HEADER PITCH 1.27mm		
X.	±0.60	X.	±5°	UNITS	mm		V/T TYPE		
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1064-15 SERIES		
.XX	±0.25	.XX	±2°						
DRAWING TYPE		CUSTOMER				晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
SCALE		1:1	SHEET						1 OF 1
DRAWING NO.		C-DS1064-15-XXXXX-X-B							