

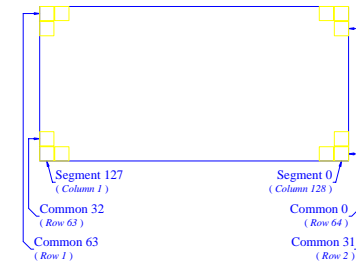



Item	Date	Remark
A	20111206	Original Drawing

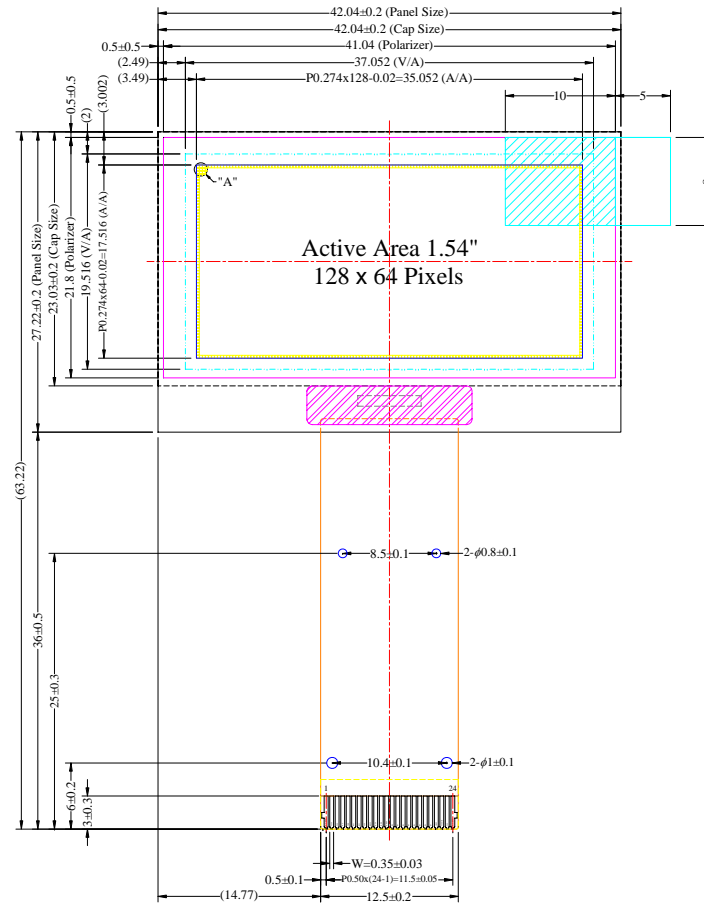

Pin	Symbol
1	N.C. (GND)
2	VLSS
3	VSS
4	N.C.
5	VDD
6	BS1
7	BS2
8	CS#
9	RES#
10	D-C#
11	R/W#
12	E/RD#
13	D0
14	D1
15	D2
16	D3
17	D4
18	D5
19	D6
20	D7
21	IRIEP
22	VCOMH
23	VCC
24	N.C. (GND)

Notes:

- Color: Yellow
- Driver IC: SSD1309
- FPC Number: UT-0205-P05
- Interface:
8-bit 68XX/80XX Parallel, 4-wire SPI, I2C
- General Tolerance: ± 0.30
- The total thickness (1.55 Max) is without polarizer protective film & remove tape.
The actual assembled total thickness with above materials should be 1.80 Max.

Customer Approval Signature	WiseChip Semiconductor Inc.						Drawing Number		Rev.	
							DMX2864CNGFAI		A	
Unless Otherwise Specified		Title	UG-2864KSYMG01 Folding Type OEL Display Module Pixel Number: 128 x 64, Monochrome, COG Package				Material			
Unit	mm						Soda Lime / Polyimide			
General Roughness		Tolerance	Drawn	E.E.	Panel / E.	P.M.				
Dimension	± 0.3		By	Dora Yang	Ting-Kuo Hu	Ivy Lo	Tiffany Hsu	Scale	Sheet	Size
Angle	± 1	Date	20111206	20111206	20111206	20111206	1:1	1 of 1	A3	