


SIGN	DATE	DESCRIPTION	APPROVER
▲	2010.01.12	Add cULus standard	Jacke
▲	2013.08.10	change the dimension from 0.93 to 1.07	Chen Bo
▲	2013.08.10	update the drawing	Chen Bo
▲	2014.02.12	update the drawing	Chen Bo

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Materials

- Item a Terminal body:Thermoplastic (UL94V-0)
- Item b Female contact:PhBz(CuSn),Tin plated

Electrical

- Voltage rating: 300V AC
- Current rating: 8A
- Withstanding Voltage: 1.6kv
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- ▲ Safety Approval: 
- Critical dimension: ▽




V7 xx 3 1 x 0 xxxx G

- No. OF POLES
- 02 2 CONTACTS
- 03 3 CONTACTS
- ...
- 24 24 CONTACTS

G RoHS compliant (lead<4%)  
In copper Alloy

0000: "@" Logo (Standard)  
000A: "ANYTEK" Mark  
Any special item by customer request. please contact sales department.

- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7035/D)
- 9 White(RAL1102)
- C Green(RAL6018/U)

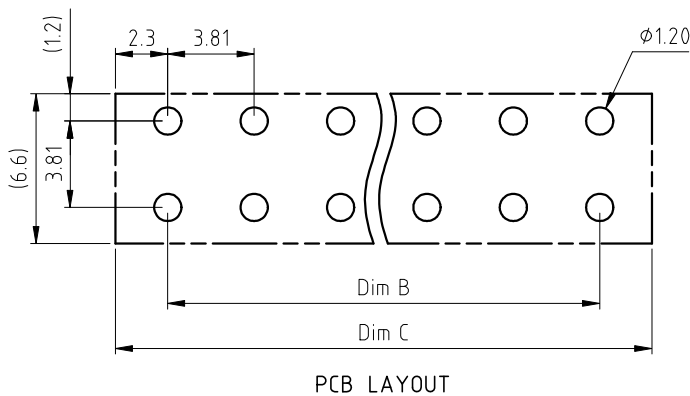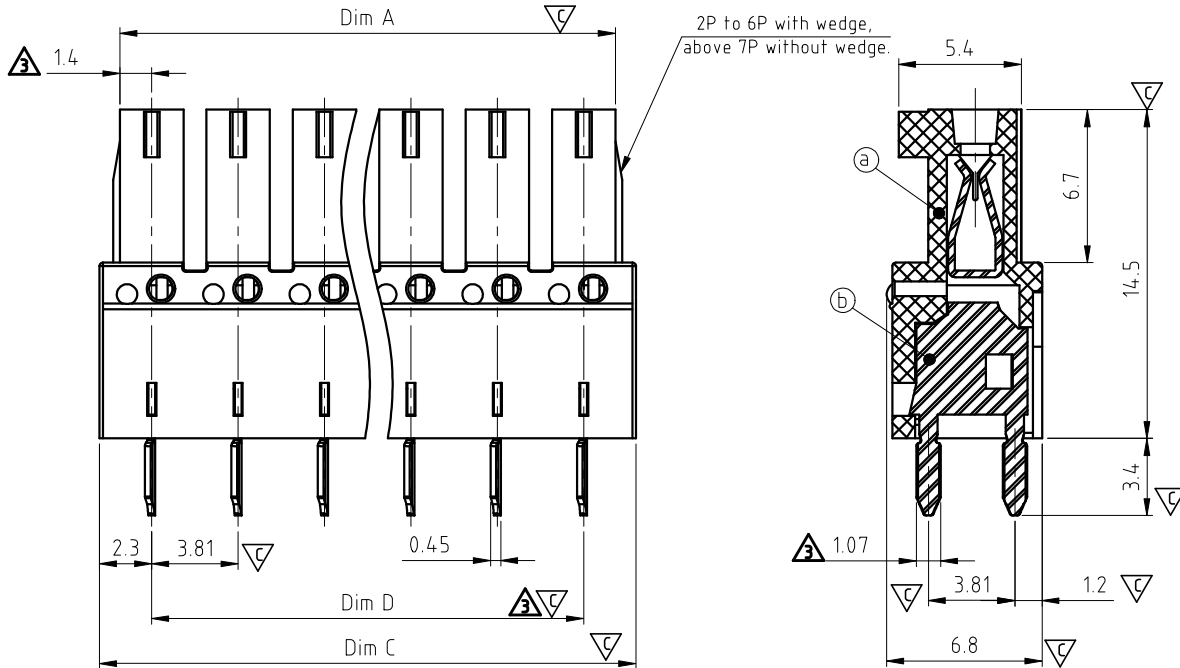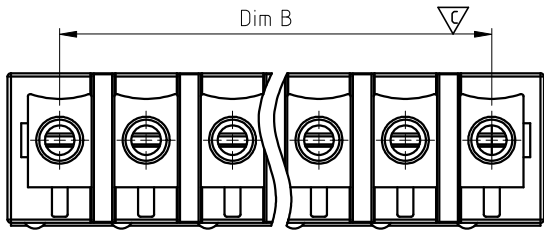

N = Number of poles

Dim A=(N-1)x3.81+2.8

Dim B=(N-1)x3.81

Dim C=(N-1)x3.81+4.6 ▲

Dim D=(N-1)x3.81

	Dim A	Dim B	Dim C	Dim D
2-5p	±0.10	±0.10	±0.10	±0.10
6-10p	±0.15	±0.15	±0.15	±0.15
11-15p	±0.20	±0.20	±0.20	±0.20
16-20p	±0.25	±0.25	±0.25	±0.25
21-24p	±0.30	±0.30	±0.30	±0.30

**ANYTEK**

**CUSTOMER COPY**

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		V7 3.81 Series Vertical		DWG NO.		8V70102	
PART NO.		V7xx31x0xxxxG		DWG NO.		8V70102	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance		
					X.	±0.5	
					UNIT:	mm	
					SCALE:	NONE	
					SHEET:	01/01	
					REV.:	E	