

NT90T (T91)



32.4×27.5×28.0

32.4×27.5×20

03001003503

us E160644

R50126373

Features

- Small size, light weight.
- Low coil power consumption, heavy contact load.
- Strong anti-shock and anti-vibration, high reliability, long life.
- Suitable for automobile, machine, electronic equipment, air conditioner and household appliances applications.
- PC board mounting and direct insert mounting available.

Ordering Information

NT90T H L A S DC12V C B 0.9

1 2 3 4 5 6 7 8 9

| | |
|---|--|
| 1 Part number: NT90T、NT90T ₂ | 6 Coil rated voltage(V): AC:12,24,110,120,220 DC:3,5,6,9,12,15,18,24,48,110 |
| 2 Load: H:30A; N:40A | 7 Contact material: C: AgCdO; S: AgSnO ₂ |
| 3 High: NIL: Standard; L: Low profile type | 8 Resist heat class: B:130℃ F:155℃ |
| 4 Contact arrangement: A:1A; B:1B; C:1C | 9 Coil power consumption: 0.6:0.6W; 0.9:0.9W NIL:2VA |
| 5 Enclosure: S: Sealed type; D: Dust cover; E: Covered; O: Open type | |

Contact Data

| | |
|------------------------------------|--|
| Contact Arrangement | 1A (SPSTBNO) 1B (SPSTNC) 1C (SPDT(B-M)) |
| Contact Material | AgCdO AgSnO ₂ |
| Contact Rating (resistive) | NO:30A/240VAC,14VDC; NC:20A/240VAC;30A/14VDC NO:40A/240VAC,30VDC; NC:30A/240VAC,30VDC (0.9W) NO:30A/277VAC;NC:20A/277VAC Motor load: NO:2HP 250VAC; NC:1.5HP 250VAC Lamp load: TV-5 5A/280VAC(Ballast) |
| Max. Switching Power | 1200W 7200VA (10000VA) |
| Max. Switching Voltage | 110VDC 300VAC Max. Switching Current:40A |
| Contact Resistance or Voltage drop | <30mΩ Item 4.12 of IEC 61810-7 |
| Operation Life | Electrical 10 ⁵ Item 4.30 of IEC 61810-7 |
| | Mechanical 10 ⁷ Item 4.31 of IEC 61810-7 |

Coil Parameter

| AC Coil Parameter | | | | | | | | | |
|-------------------|-------------------|------|------------------|------------------------|--|--|------------|-----------------|-----------------|
| Dash numbers | Rated voltage VAC | | Rated current mA | Coil resistance Ω ±10% | Pick up voltage VAC(max) (75%of rated voltage) | Release voltage VAC(min) (30%of rated voltage) | Coil power | Operate Time ms | Release Time ms |
| | Rated | Max | | | | | | | |
| 012AC | 12 | 15.6 | 187 | 27 | 9.0 | 3.6 | 2VA | — | — |
| 024AC | 24 | 31.2 | 95 | 120 | 18.0 | 7.2 | | | |
| 110AC | 110 | 143 | 20 | 2360 | 82.5 | 33.0 | | | |
| 120AC | 120 | 156 | 16.5 | 3040 | 90.0 | 36.0 | | | |
| 220AC | 220 | 286 | 6.4 | 13490 | 165.0 | 66.0 | | | |

CAUTION: 1.The use of any coil voltage less than the rated coil voltage will compromise the operation of the relay.
2.Pickup and release voltage are for test purposes only and are not to be used as design criteria.

Coil Parameter

| DC Coil Parameter | | | | | | | | |
|-------------------|----------------|------|-----------------------------------|---|---|--------------|-----------------|-----------------|
| Dash numbers | Coil voltage V | | Coil resistance $\Omega \pm 10\%$ | Pick up voltage VDC(max) (75% of rated voltage) | Release voltage VDC(min) (10% of rated voltage) | Coil power W | Operate Time ms | Release Time ms |
| | Rated | Max. | | | | | | |
| 003-900 | 3 | 3.9 | 10 | 2.25 | 0.3 | 0.9 | <15 | <10 |
| 005-900 | 5 | 6.5 | 28 | 3.75 | 0.5 | | | |
| 006-900 | 6 | 7.8 | 40 | 4.50 | 0.6 | | | |
| 009-900 | 9 | 11.7 | 90 | 6.75 | 0.9 | | | |
| 012-900 | 12 | 15.6 | 160 | 9.00 | 1.2 | | | |
| 015-900 | 15 | 19.5 | 250 | 10.25 | 1.5 | | | |
| 018-900 | 18 | 23.4 | 360 | 13.50 | 1.8 | | | |
| 024-900 | 24 | 31.2 | 640 | 18.00 | 2.4 | | | |
| 048-900 | 48 | 62.4 | 2560 | 36.00 | 4.8 | | | |
| 110-900 | 110 | 143 | 13445 | 82.50 | 11.0 | | | |
| | | | | | | | | |
| 003-600 | 3 | 3.9 | 15 | 2.25 | 0.3 | 0.6 | <15 | <10 |
| 005-600 | 5 | 6.5 | 42 | 3.75 | 0.5 | | | |
| 006-600 | 6 | 7.8 | 60 | 4.50 | 0.6 | | | |
| 009-600 | 9 | 11.7 | 135 | 6.75 | 0.9 | | | |
| 012-600 | 12 | 15.6 | 240 | 9.00 | 1.2 | | | |
| 015-600 | 15 | 19.5 | 375 | 10.25 | 1.5 | | | |
| 018-600 | 18 | 23.4 | 540 | 13.50 | 1.8 | | | |
| 024-600 | 24 | 31.2 | 960 | 18.00 | 2.4 | | | |
| 048-600 | 48 | 62.4 | 3840 | 36.00 | 4.8 | | | |
| 110-600 | 110 | 143 | 20167 | 82.50 | 11.0 | | | |







CAUTION: 1.The use of any coil voltage less than the rated coil voltage will compromise the operation of the relay.
2.Pickup and release voltage are for test purposes only and are not to be used as design criteria.

Operation condition


| | | |
|--------------------------|---|------------------------------|
| Insulation Resistance | 1000M Ω min (at 500VDC) | Item 7 of IEC 60255-5 |
| Dielectric Strength | | |
| Between contacts | 50Hz 1500V | Item 6 of IEC 60255-5 |
| Between contact and coil | 50Hz 2500V | Item 6 of IEC 60255-5 |
| Shock resistance | 200m/s ² 11ms | IEC 68-2-27 Test Ea |
| Vibration resistance | 10Hz~55Hz double amplitude 1.5mm | IEC 68-2-6 Test Fc |
| Terminals strength | 10N | IEC 68-2-21 Test Ua1&Ua2 |
| Solderability | 235 $^{\circ}$ C \pm 2 $^{\circ}$ C 3s \pm 0.5s | IEC 68-2-20 Test Ta method 1 |
| Ambient Temperature | -55 $^{\circ}$ C ~100 $^{\circ}$ C -55 $^{\circ}$ C ~125 $^{\circ}$ C | |
| Relative Humidity | 85% (at 40 $^{\circ}$ C) | IEC 68-2-3 Test Ca |
| Mass | 31g (Low profile type) 35g | |

Dimensions


mm /inch

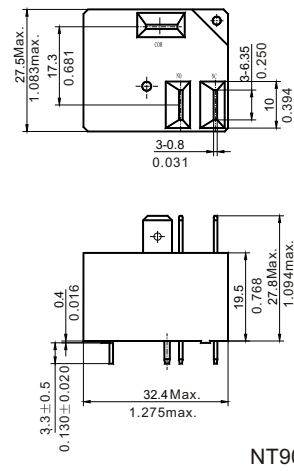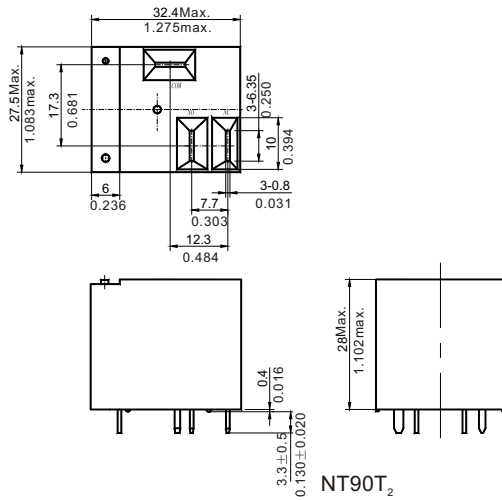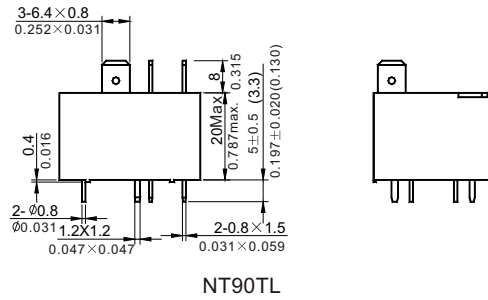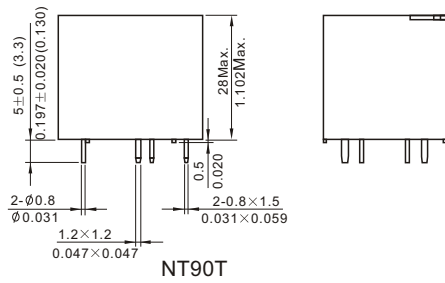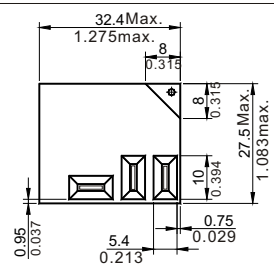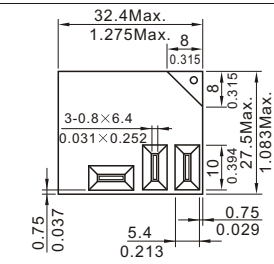

Dimensions

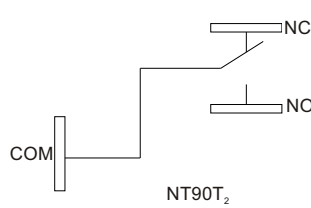


NT90T₂




NT90T

Wiring diagram(Top view)

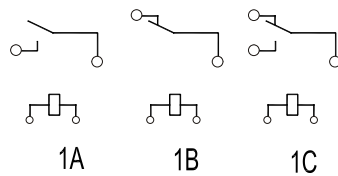

Wiring diagram(Bottom view)

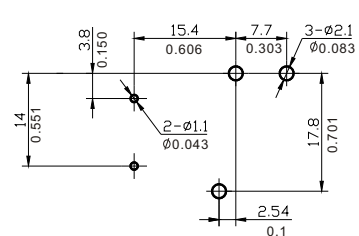

Mounting (Bottom view)

NOTES 1).Dimensions are in millimeters.
2).Inch equivalents are given for general information only.

FORWARD RELAYS

Safety approvals

| Safety approval | UL&CUR | TüV | CQC |
|-----------------|---|--|--------------------------------|
| Load | NO:40A/240VAC 30A/277VAC NC: 30A/240VAC,30VDC 20A/277VAC Ballast:5A/280VAC TV-5 HP:A 2 HP 250VAC 1HP/16AFLA/120VAC 2HP/12AFLA/240VAC B 1½HP 250VAC 30LRA/10AFLA/120VAC 30LRA/10AFLA/240VAC | NO:40A/240VAC 14VDC 30A/277VAC NC:30A/240VAC 14VDC 20A/277VAC | NO:30A/240VAC NC:20A/240VAC |

Reference Data

