

N=Number of Poles
 Dim.P=(N-1)×5.08
 Dim.L=N×5.08

Dim. Poles	2P-6P	7P-12P	13P-18P	19P-24P
Dim.L	±0.15	±0.20	±0.30	±0.40
Dim.P	±0.15	±0.20	±0.30	±0.40

SIGN	DATE	DESCRIPTION	APPROVER
△			
△			
△			


THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

- Item① Terminal body:Thermoplastic (UL94V-0)
- Item② Terminal body:Thermoplastic (UL94V-0)
- Item③ Terminal lever:Thermoplastic (UL94V-0) Orange(RAL2011/P)
- Item④ Wire guard:Stainless Steel
- Item⑤ Female contact :PhBz (CuSn) Tin plated

Electrical cULus

- Voltage rating: 300V
- Current rating: 10A
- Solid wire(AWG):12-26
- Stranded wire(AWG):12-26
- Wire strip length:8-9mm
- Withstanding Voltage:1.6KV
- Operating temperature:-40°C to +115°C
- Safety Approval: cULus
- Critical dimension:
- ▲ withdrawal force: 100~500gf/pole (mating pin strip: OQxx54x000000G/AG)

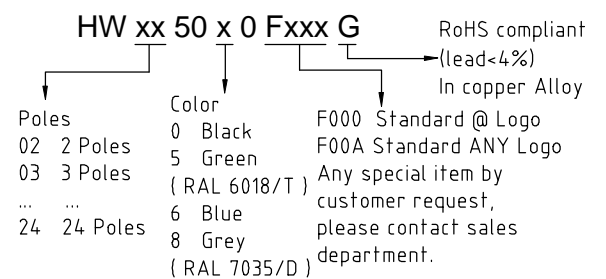

ANYTEK				CUSTOMER COPY			
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD							
TITLE		HW-5.08 Series Contact with the opposite direction (down side)					
PART NO.	HWxx50x0FxxxG			DWG NO.	8HW0F01		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance		
		Da cheng 2013.08.05	Da cheng 2013.08.05		X. ±0.50		
					X.X ±0.30		
					X.XX ±0.10		
				SHEET: 01/01	X° ±1°		
				UNIT: mm	SCALE: NONE		
				REV.: B			