



**RAYSTAR**

**曜凌光電股份有限公司**

Web: [www.raystar-optronics.com](http://www.raystar-optronics.com) E-mail: [sales@raystar-optronics.com](mailto:sales@raystar-optronics.com)

**RFC350L-AZW-DNN**

---

## **SPECIFICATION**

---

## General Specifications

- Size: 3.5 inch
- Dot Matrix: 320 x RGB x 240(TFT) dots
- Module dimension: 76.84(W) x 63.84(H) x 3.27(D)mm
- Active area: 70.08 x 52.56 mm
- Dot pitch: 0.073 x 0.219 mm
- Aspect Ratio: 4:3
- View Direction: 12 o'clock
- Gray Scale Inversion Direction: 6 o'clock
- LCD type: TFT, Normally White, Transmissive
- Backlight Type: LED, Normally White
- Touch Panel: Without Touch Panel
- Surface: Anti-Glare

\*Color tone slight changed by temperature and driving voltage.


## Interface

### LCM PIN Definition

| Pin | Symbol | Function                            |
|-----|--------|-------------------------------------|
| 1   | LED-   | Power for LED backlight cathode     |
| 2   | LED-   | Power for LED backlight cathode     |
| 3   | LED+   | Power for LED backlight anode       |
| 4   | LED+   | Power for LED backlight anode       |
| 5   | NC     | No connect                          |
| 6   | NC     | No connect                          |
| 7   | NC     | No connect                          |
| 8   | /RESET | Hardware reset                      |
| 9   | SPENA  | Chip select pin of serial interface |
| 10  | SPCLK  | Clock pin of serial interface       |
| 11  | SPDAT  | Data input pin in serial mode       |
| 12  | B0     | Data bus                            |
| 13  | B1     | Data bus                            |
| 14  | B2     | Data bus                            |
| 15  | B3     | Data bus                            |
| 16  | B4     | Data bus                            |
| 17  | B5     | Data bus                            |
| 18  | B6     | Data bus                            |
| 19  | B7     | Data bus                            |
| 20  | G0     | Data bus                            |
| 21  | G1     | Data bus                            |
| 22  | G2     | Data bus                            |
| 23  | G3     | Data bus                            |
| 24  | G4     | Data bus                            |
| 25  | G5     | Data bus                            |
| 26  | G6     | Data bus                            |
| 27  | G7     | Data bus                            |
| 28  | R0     | Data bus                            |
| 29  | R1     | Data bus                            |

|    |       |  |
|----|-------|--|
| 30 | R2    | Data bus   |
| 31 | R3    | Data bus   |
| 32 | R4    | Data bus   |
| 33 | R5    | Data bus   |
| 34 | R6    | Data bus   |
| 35 | R7    | Data bus   |
| 36 | HSYNC | Line synchronization signal  |
| 37 | VSYNC | Frame synchronization signal   |
| 38 | DCLK  | Dot-clock signal and oscillator source   |
| 39 | NC    | No connect   |
| 40 | NC    | No connect   |
| 41 | VCC   | Power Supply   |
| 42 | VCC   | Power Supply   |
| 43 | NC    | No connect   |
| 44 | NC    | No connect   |
| 45 | NC    | No connect   |
| 46 | NC    | No connect   |
| 47 | NC    | No connect   |
| 48 | SEL2  | Input pin to select input interface mode   |
| 49 | SEL1  | Input pin to select input interface mode   |
| 50 | SEL0  | Input pin to select input interface mode   |
| 51 | NC    | No connect   |
| 52 | DE    | Display enable pin from controller. Internal pull high<br>Connect to VCCIO or floating if not used |
| 53 | DGND  | System ground pin of the IC. Connect to system ground.   |
| 54 | AVSS  | Grounding for analog circuit -Connect to system ground   |

# Contour Drawing

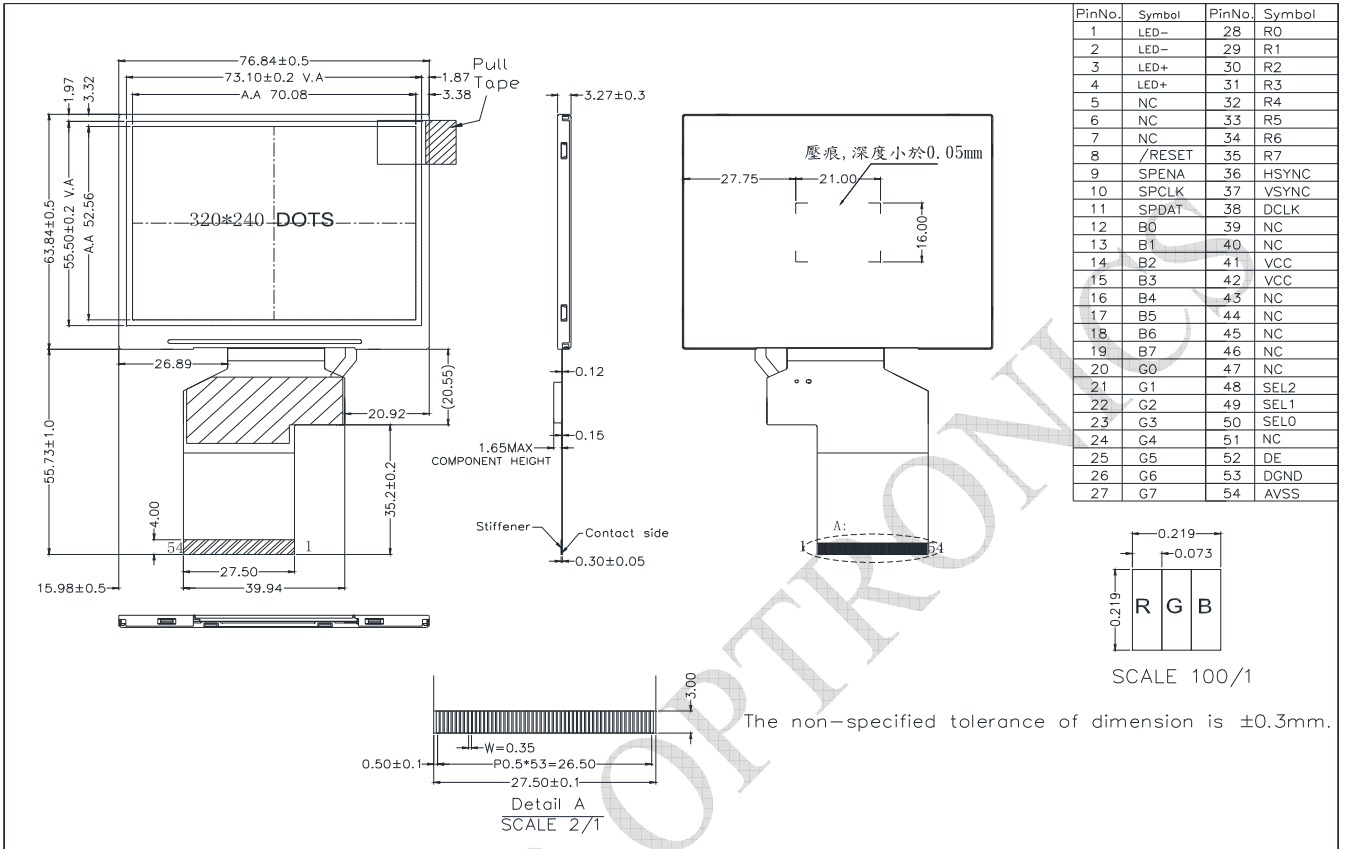

RAYSTAR

## Absolute Maximum Ratings

| Item                  | Symbol | Min | Typ | Max | Unit |
|-----------------------|--------|-----|-----|-----|------|
| Operating Temperature | TOP    | -20 | —   | +70 | °C   |
| Storage Temperature   | TST    | -30 | —   | +80 | °C   |

## Electrical Characteristics

### Operating conditions

| Item                   | Symbol | Min | Typ | Max | Unit |
|------------------------|--------|-----|-----|-----|------|
| Supply Voltage For LCM | VCC    | 3.0 | 3.3 | 3.6 | V    |
| Supply Current For LCM | ICC    | —   | 8.6 | 15  | mA   |