



RAYSTAR

RAYSTAR Optronics, Inc.
曜凌光電股份有限公司



曜凌光電股份有限公司
Raystar Optronics, Inc.

T: +886-4-2565-0761 | F: +886-4-2565-0760
sales@raystar-optronics.com | www.raystar-optronics.com

RFE43DP-EIW-DBS

SPECIFICATION

General Specifications

- Size: 4.3 inch
- Dot Matrix: 480 x RGB x 272(TFT) dots
- Module dimension: 106.7 x 83.98 x 10.55 mm
- Active area: 95.04 x 53.856 mm
- Dot pitch: 0.066 x 0.198 mm
- LCD type: TFT, Normally White, Transmissive
- View Direction: 12 o'clock
- Gray Scale Inversion Direction: 6 o'clock
- Aspect Ratio: 16:9
- Backlight Type: LED, Normally White
- Controller IC: RA8875
- Interface: Digital 8080 family MPU
- Touch Screen: Resistive Touch screen
- Surface: Anti-Glare


*Color tone slight changed by temperature and driving voltage.

Interface

LCM PIN Definition (CON3)

Pin	Symbol	Function
1	GND	System ground
2	VDD	Power Supply : +3.3V
3	NC	No connect
4	RS	Data/Command select
5	WR	Write strobe signal
6	RD	Read strobe signal
7~22	DB0~DB15	Data bus
23	WAIT	Wait Signal Output(H:active)
24	RTP_INT	RTP Interrupt
25	CS	Chip select
26	RST	Hardware reset
27	DIP ON	Display control H: On \ L:Off
28~32	NC	No connect
33~34	VLED-	Power for LED backlight cathode
35~36	VLED+	Power for LED backlight anode

Contour Drawing

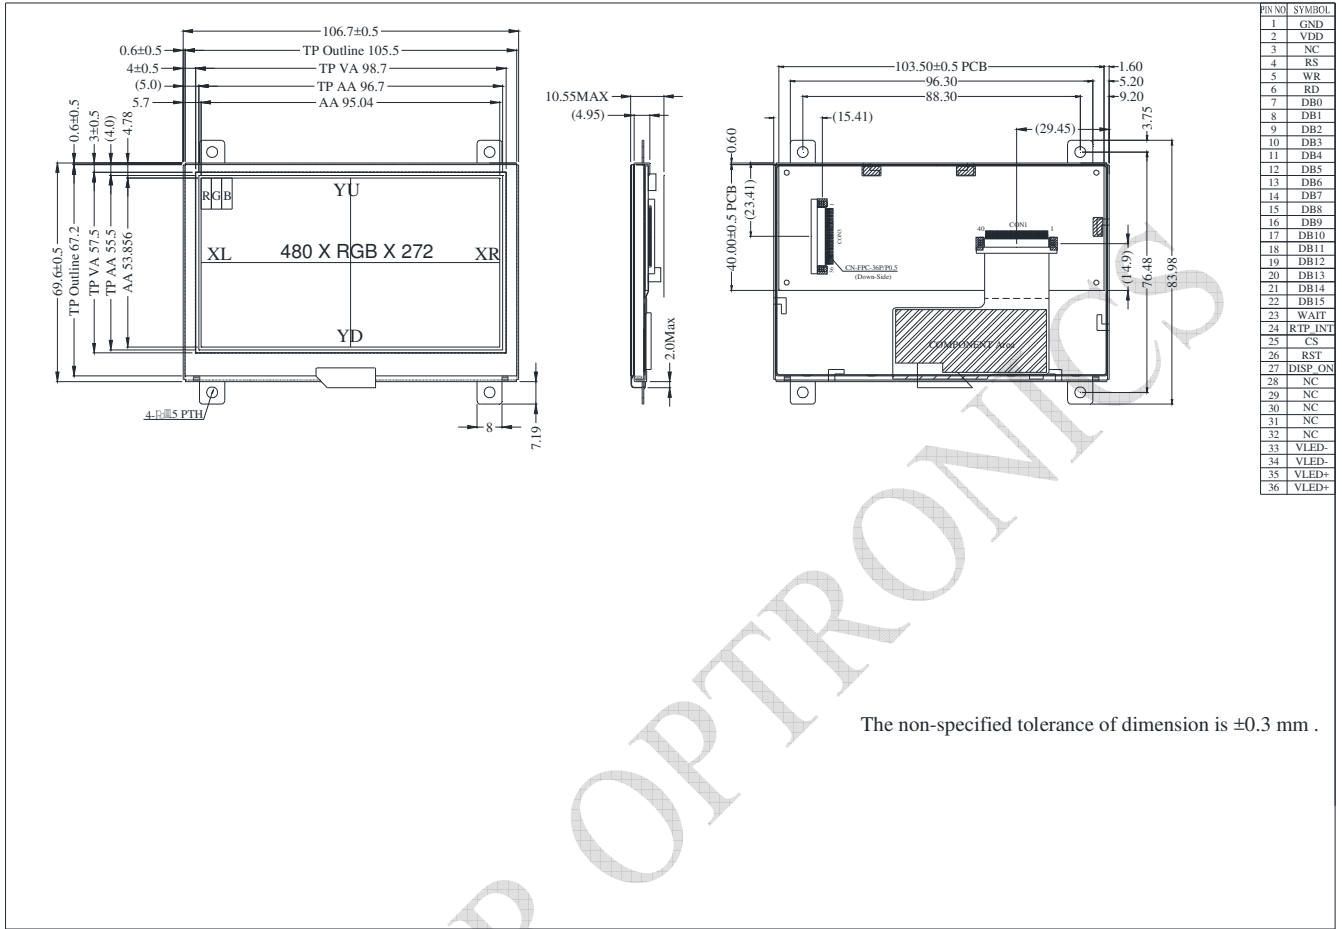

The non-specified tolerance of dimension is ±0.3 mm .

RAYSTAR OPTRONICS

Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	-20	—	+70	°C
Storage Temperature	TST	-30	—	+80	°C

Electrical Characteristics

1. Operating conditions: (CON3.Pin1=GND, Pin2=VDD)

Item	Symbol	Condition	Min	Typ	Max	Unit
Supply Voltage For LCM	VDD	—	3.0	3.3	3.6	V
Supply Current For LCM	IDD	—	—	65	100	mA

2. Backlight driving conditions (CON3.Pin33,34=VLED-, Pin35,36=VLED+)

Parameter	Symbol	Min	Typ	Max	Unit
Operation Current For LED Driver	VLED+=3.3V	270	-	405	mA
Power Consumption	VLED+=3.3V	891	-	1337	mW
Supply Voltage For LED Driver	VLED+	3.3	-	5	V
LED Life Time		-	50,000	-	Hr