


RoHS

IP66-68

REV.	DESCRIPTION	DATE
A	ISSUE	May/04/2015
A1	Add 7~8Pin & Correct Pin Assignment.	Oct/29/2018

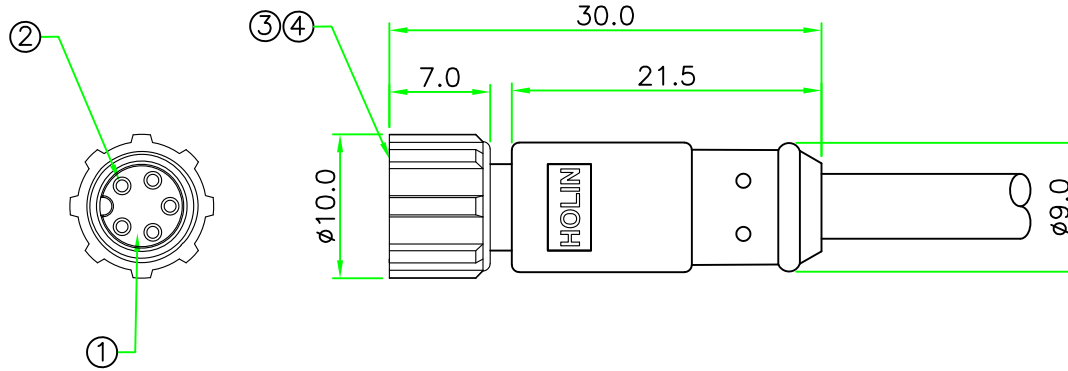

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 1.5A / 3A

TEMPERATURE RANGE: -20°C TO +80°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: A08x-P2xxSN



02 - 2 PINS 06 - 6 PINS

03 - 3 PINS 07 - 7 PINS


04 - 4 PINS 08 - 8 PINS

05 - 5 PINS

I - CURRENT RATING 1.5A

D - CURRENT RATING 3A

*Cable specification and length can be customized.

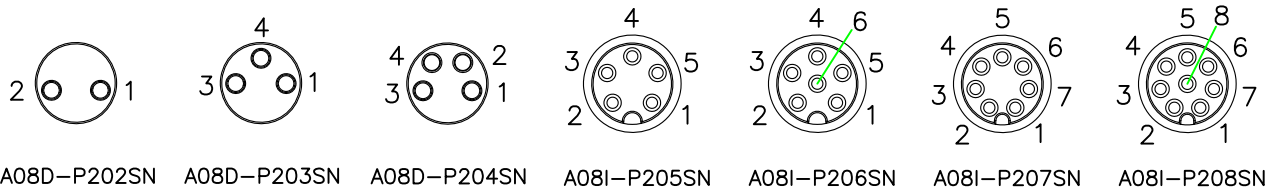

PIN ASSIGNMENT FRONT VIEW (前視圖)

4	RING NUT	Nylon + GF.	BLACK	1	
3	O-RING	Viton.	BLACK	1	
2	CONTACT	Brass , 6 u" Gold plated. Female Contact.		N	
1	CONNECTOR	M8 A-Coding Female Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS


HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE : M8 A-Coding Female
SCALE	2:1	All Pastic Molded Cable Ass'y
UNLESS OTHERWISE SPECIFIED TOLERANCES:		P/N: A08x-P2xxSN
.x ± 0.5	.xx ± 0.25	DR. SIBYL
.xxx± 0.1	ANGLE ± 1°	CH. ERIC
REV. A1	SHEET 1/1	DWG.NO: A08x-P2xxSN
		AP.

RoHS


IP66-68

REV.	DESCRIPTION	DATE
A	ISSUE	Oct/26/2018

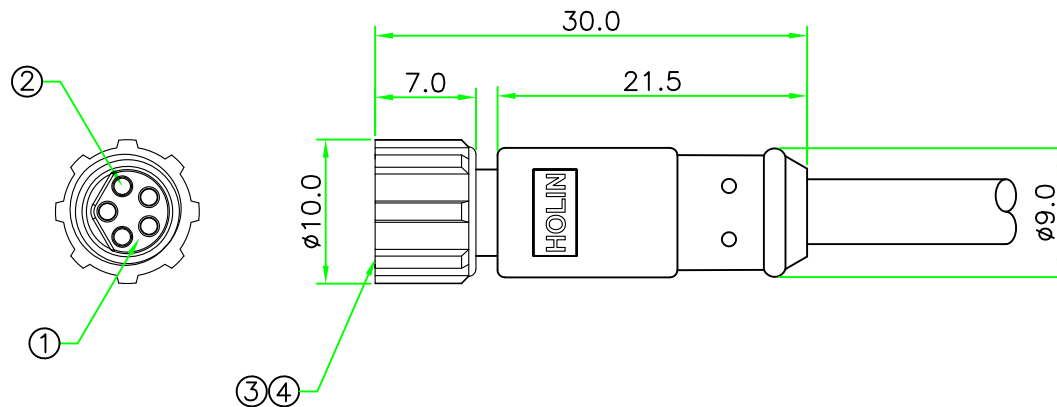

NOTES:

1. ELECTRICAL CHARACTERISTICS:
 CURRENT RATING: 3A
 TEMPERATURE RANGE: -20°C TO +80°C
 DIELECTRIC WITHSTANDING VOLTAGE:
 500V AC FOR ONE MINUTE



PIN ASSIGNMENT
 FRONT VIEW
 (前視圖)

*Cable specification and length can be customized.

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
4	RING NUT	Nylon+GF.	BLACK	1	
3	O-RING	Viton.	BLACK	1	
2	CONTACT	Brass, 6 u" Gold plated. Female Contact.		5	
1	CONNECTOR	M8 B-Coding Female Connector Insert. Nylon+GF.	BLACK	1	

HOLIN[®] HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司		TITLE : M8 B-Coding Female All Plastic Molded Cable Ass'y	
UNIT: mm	SCALE 2:1	P/N: B08D-P205SN	DR. SIBYL
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°			CH. ERIC
REV. A	SHEET 1/1	DWG.NO: B08D-P205SN	AP.