

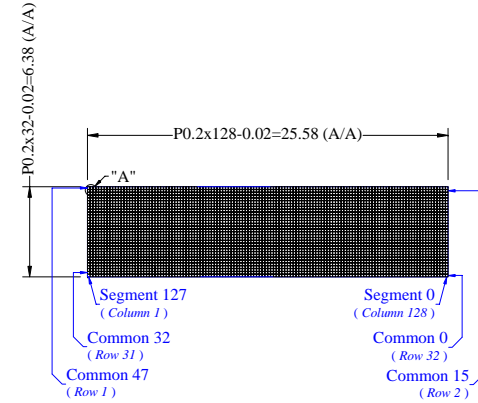
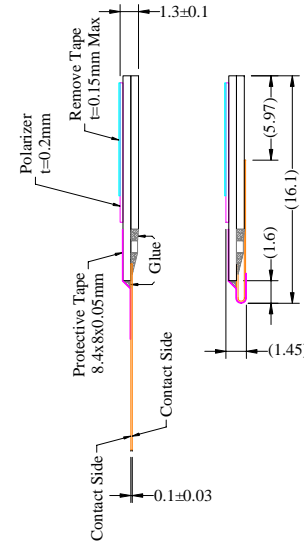


Item	Date	Remark
A	20101013	Original Drawing
B	20101229	Modify Pin Define

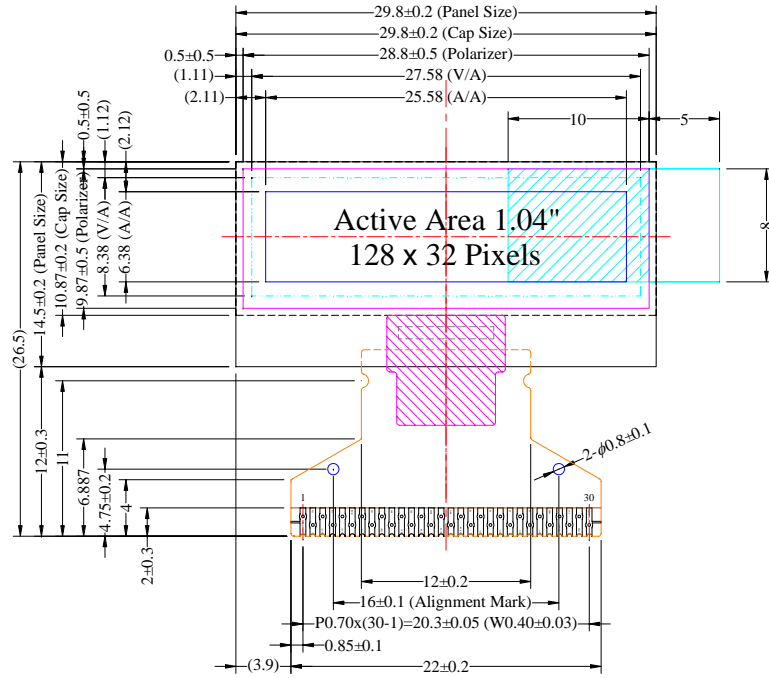

Pin	Symbol
1	N.C. (GND)
2	C2P
3	C2N
4	C1P
5	C1N
6	VDDB
7	N.C.
8	VSS
9	VDD
10	BS0
11	BS1
12	BS2
13	CS#
14	RES#
15	D/C#
16	R/W#
17	E/RD#
18	D0
19	D1
20	D2
21	D3
22	D4
23	D5
24	D6
25	D7
26	IREF
27	VCOMH
28	VCC
29	VLSS
30	N.C. (GND)

**Notes:**

- Color: White
- Driver IC: SSD1306
- FPC Number: UT-0206-P05
- Interface:  
8-bit 68XX/80XX Parallel, 3-/4-wire SPI, I2C
- General Tolerance: ±0.30
- The total thickness (1.40 Max) is without polarizer protective film & remove tape.  
The actual assembled total thickness with above materials should be 1.65 Max.

Customer Approval Signature	WiseChip Semiconductor Inc.						Drawing Number	Rev.	
		UG-2832TSWGG01 Folding Type OEL Display Module Pixel Number: 128 x 32, Monochrome, COG Package						DMX2832SDGF44	B
	Material						Soda Lime / Polyimide		
	Title		Drawn	E.E.	Panel / E.	P.M.	Scale	Sheet	Size
	Pixel Number: 128 x 32, Monochrome, COG Package		Gary Lin	Ting Kuo Hu	Ivy Lo	Tiffany Hsu	1:1	1 of 1	A3
	Date		20101229	20101229	20101229	20101229			