
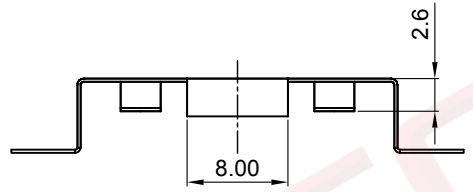


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY reserves the right to make changes to the product design and specifications without notice. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 07/17/20'		

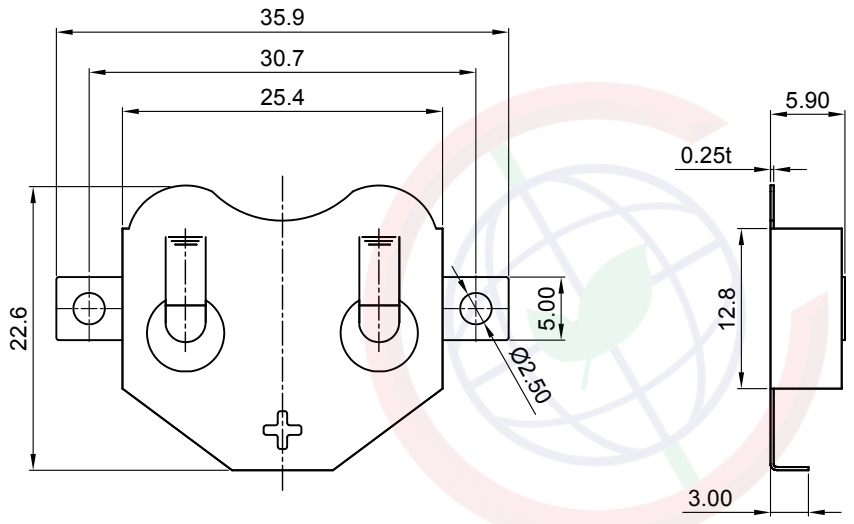

- Material:
 - Contact: Phosphor bronze.
 - Contact plating: Nickel.
- Specification:
 - Contact Resistance: 100mΩ Max.
 - Operating Temperature: -30°C~+85°C.
- Part Number Code:

DS1092-56 - X X X X

 - Packing type: R: Tape on reel, P: Polybag
 - Contact plating: N: Nickel
 - Thickness: 0250: 0.25mm
 - Material: PB: Phosphor bronze

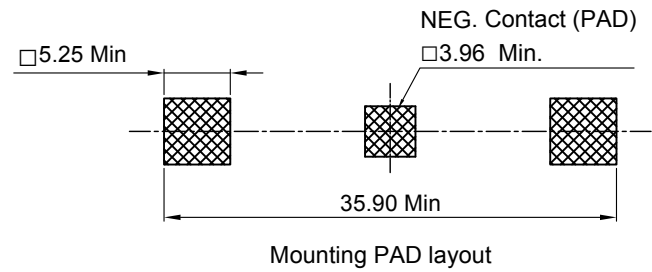

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	CR2450 Battery Holder Spring SMT Type
X.	±0.60	X.	±5°	UNITS	mm	SHEET SIZE	A4
.X	±0.38	.X	±3°	SERIES DS1092-56 SERIES			
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNELY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER		DRAWING NO. C-DS1092-56-XXXX-A			
SCALE		1:1	SHEET	1 OF 1			