

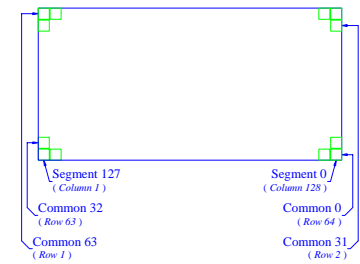



Item	Date	Remark
A	20120323	Original Drawing

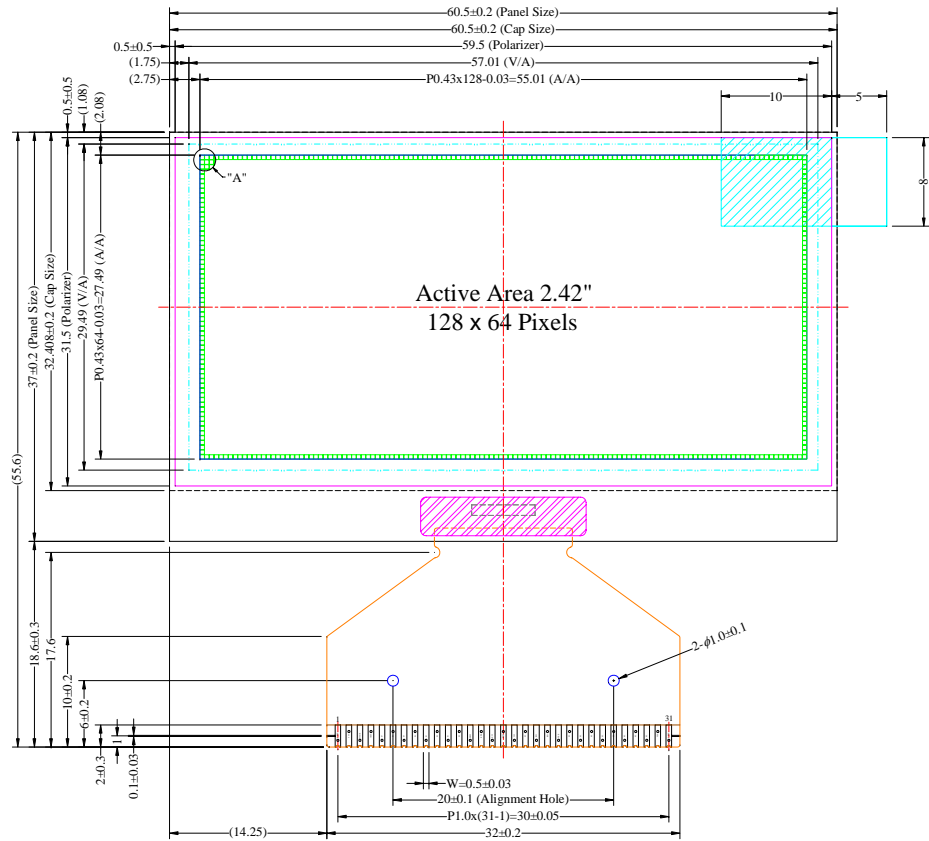

Pin	Symbol
1	N.C. (GND)
2	VCC
3	VCOMH
4	IREF
5	D7
6	D6
7	D5
8	D4
9	D3
10	D2
11	D1
12	D0
13	ERD#
14	R/W
15	DC#
16	RES#
17	CS#
18	NC
19	BS2
20	BS1
21	VDD
22	N.C.
23	N.C.
24	N.C.
25	N.C.
26	N.C.
27	N.C.
28	N.C.
29	N.C.
30	VSS
31	N.C. (GND)

- Notes:
- Color: Green
 - Driver IC: SSD1309
 - FPC Number: UT-0205-P18
 - Interface:
8-bit 68XX/80XX Parallel, 4-wire SPI, I2C
 - General Tolerance: ±0.30
 - The total thickness (2.10 Max) is without polarizer protective film & remove tape.
The actual assembled total thickness with above materials should be 2.35 Max.

Customer Approval Signature	WiseChip Semiconductor Inc.							Drawing Number	Rev.
								DMX2864SDGFAW	A
	Title UG-2864ASGPG14 Folding Type OEL Display Module Pixel Number: 128 x 64, Monochrome, COG Package							Material	
								Soda Lime / Polyimide	
	Unit mm		Tolerance	Drawn	E.E.	Panel / E.	P.M.	Scale	Sheet
General Roughness		By		Gary Lin	Ting-Kuo Hu	Ivy Lo	Tiffany Hsu	1:1	1 of 1
Dimension		±0.3	Date	20120323	20120323	20120323	20120323		
Angle		±1							