


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	Andy_H 01/20/16'		LJC 01/20/16'

N=No.OF CONTACTS/2

RECOMMENDED PCB LAYOUT(Tolerance=±0.05)
建议PCB板孔尺寸,公差=±0.05mm

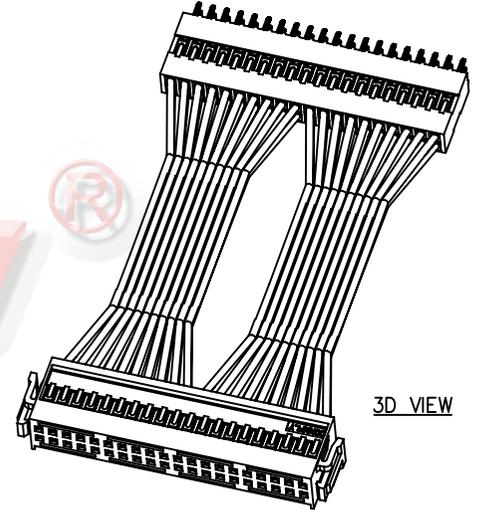

3D VIEW

NOTES:

- MAIN SPECIFICATIONS
 - Housing material: NYLON 66
 - Contact: Copper Alloy
 - Wire range: AWG#26 OR AWG#24(2468)
 - Rated voltage: 250V
 - Rated current: 1A
 - Contact resistance: ≤ 100mΩ
 - Insulation resistance: ≥ 1000MΩ
 - Withstanding voltage: 500V,AC 1 minute
 - Temperature range: -20 ~ +80°C

Product Number Code:
DS1069-09- X X X X X X X

NO.OF CONTACTS
2*2~2*20

MOUNTING TYPE
C: Crimp
W: Crimp+Soldering

WIRE GAUGE
24: AWG #24
26: AWG #26

WIRE LENGTH
080: 80mm 180: 180mm

WIRE STYLE
A: UL2468

CONTACT PLATING
6: FULL TIN 8: FULL GOLD

HOUSING COLOR
1: PLUG 1 WHITE, PLUG 2 BLACK
2: PLUG 1 BLACK, PLUG 2 WHITE
3: PLUG 1 WHITE, PLUG 2 WHITE
4: PLUG 1 BLACK, PLUG 2 BLACK

GENERAL TOLERANCE		ANGLE TOLERANCE	
X	±0.60	X	±3°
.X	±0.38	.X	±2°
.XX	±0.25	.XX	±1°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1069-09-XXXXXX-A		

PROJECTION		TITLE	2*20Pin TJC8 TYPE+2*20Pin XH
UNITS	mm	TYPE CABLE,TIN PLATING OVER ALL	
SHEET SIZE	A4	SERIES	DS1069-09

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD

Tel:86-574-6350878
Fax:86-574-6350891
E-mail:sale@connfly.com
<http://www.connfly.com>
Add:East Industry Zone Kuan...
Town Cixi Ningbo China