



RoHS

IP66-68

6~12 PINS

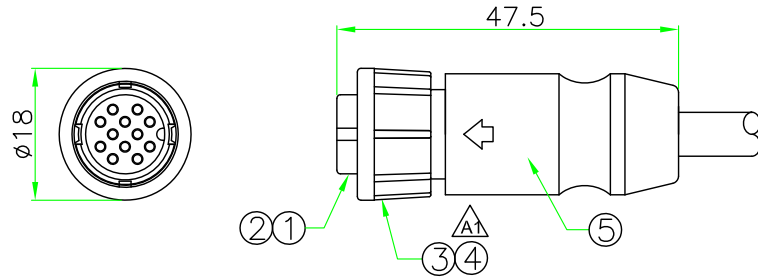

2~5 PINS

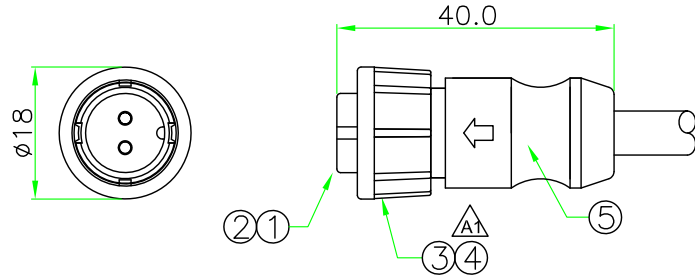

REV.	DESCRIPTION	DATE
A	ISSUE	Feb/12/2005
A1	Change@Shape	Jun/25/2014

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A / 10A

CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: CBx-L2xxSN

02 - 2 PIN 07 - 7 PIN

03 - 3 PIN 08 - 8 PIN

04 - 4 PIN 10 - 10 PIN


05 - 5 PIN 12 - 12 PIN

06 - 6 PIN

P - CURRENT RATING 10A

D - CURRENT RATING 5A

N - CURRENT RATING 2A

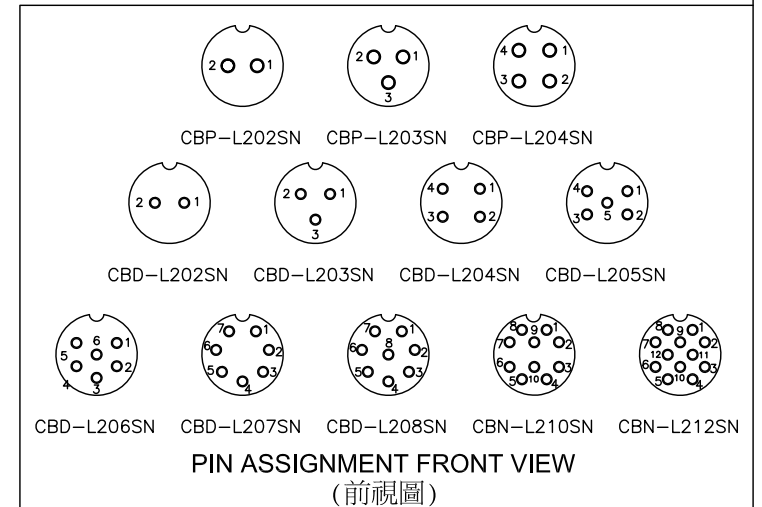

※Cable specification and length can be customized.

5	OVERMOLD	PVC or PU.	BLACK	1	
4	LOCK NUT	NYLON+GF	BLACK	1	
3	O-RING	NBR.	BLACK	1	
2	CONTACT	Brass ,Female Pin. 6u" Gold Plated.		N	
1	CONNECTOR	B Size Female Connector Insert, NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

		UNIT: mm	TITLE : Circular B Size Lock Type Female Connector Female Pin Molded Cable	
SCALE		1:1	P/N: CBx-L2xxSN	
<small>UNLESS OTHERWISE SPECIFIED TOLERANCES:</small> x ±0.25 xx ±0.1 xxx ±0.05 ANGLE ±.1gX		REV. A1	SHEET 1/1	DWG.NO: CBx-L2xxSN
				DR. Patty CH. ERIC AP.