

SIGN	DATE	DESCRIPTION	APPROVER
△	2009.09.09	The part No is changed	Jacke
△	2011.02.25	The wire is changed from 14-30(AWG) to 14-28(AWG)	Aaron
△	2011.02.25	Add is cULus	Aaron

Material:

- Item a Clamp: Brass Ni plated
- Item b Male contact pin: Brass, Tin plated.
- Item c Terminal screw: Steel Zinc plating
- Item d Terminal housing: Thermoplastic (UL94V-0)
- Item e Terminal cover: Thermoplastic (UL94V-0)

Electrical: cULus

- Voltage rating: 300V
- Current rating: 8A
- Wire range:
 - △ ● Solid wire(AWG): 14-28
 - △ ● Stranded wire(AWG): 14-28
- Torque(Lb-In): 2.17
- Screw: M2
- Wire strip length: 6 mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- △ ● Safety Approval:






V5 xx 31 x 0 xxxx G

- No. OF POLES
- 02 2 CONTACTS
 - 03 3 CONTACTS
 -
 - 24 24 CONTACTS

Color

- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7035/D)

G: Pb<40000ppm
 0000: "@ " Logo (Standard)
 000A: "ANYTEK" Mark
 Any special item by customer request. please contact sales department.

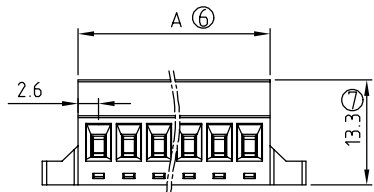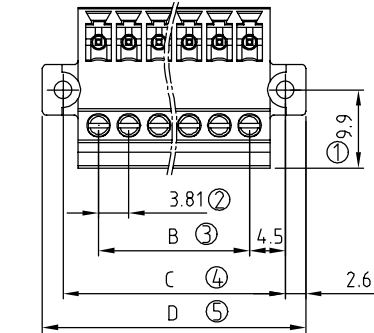

N = Number of poles
 Dim A=Nx3.81+1.39
 Dim B=(N-1)x3.81
 Dim C=Nx3.81+5.19
 Dim D=Nx3.81+10.39

	Dim A	Dim B	Dim C	Dim D
2-6p	±0.15	±0.15	±0.15	±0.15
7-12p	±0.20	±0.20	±0.20	±0.20
13-18p	±0.30	±0.30	±0.30	±0.30
19-24p	±0.35	±0.35	±0.35	±0.35

ANYTEK				CUSTOMER COPY			
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD							
TITLE	V5 3.81 mm W/O Flange Bottom cover fixed type Series						
PART NO.	V5xx31x0xxxxG △			DWG NO.	8V50101		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance		
		Aaron 2011.02.25	Jacke 2009.08.27		X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°		
						UNIT: mm	SCALE: NONE
				SHEET: 01/01		REV.: D	