
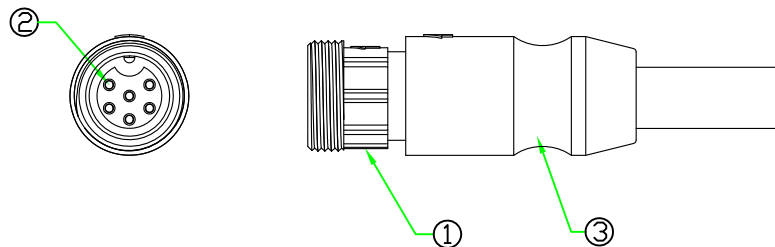



RoHS

IP66-68

REV.	DESCRIPTION	DATE
A	ISSUE	May/20/2015

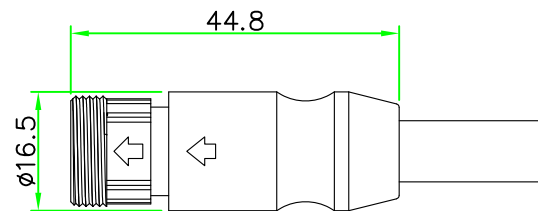

Ref.

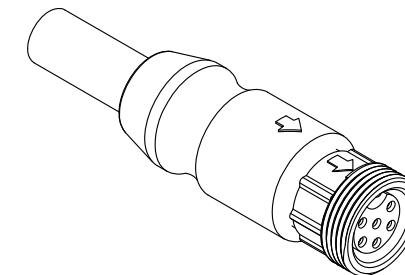


NOTES:

- ELECTRICAL CHARACTERISTICS:
 CURRENT RATING: 5A / 10A
 CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C
 DIELECTRIC WITHSTANDING VOLTAGE:
 500V AC FOR ONE MINUTE
- HOW TO ORDER: CBx-P3xxSN

- 02 - 2 PIN
- 03 - 3 PIN
- 04 - 4 PIN
- 05 - 5 PIN
- 06 - 6 PIN

- P - CURRENT RATING 10A
- D - CURRENT RATING 5A

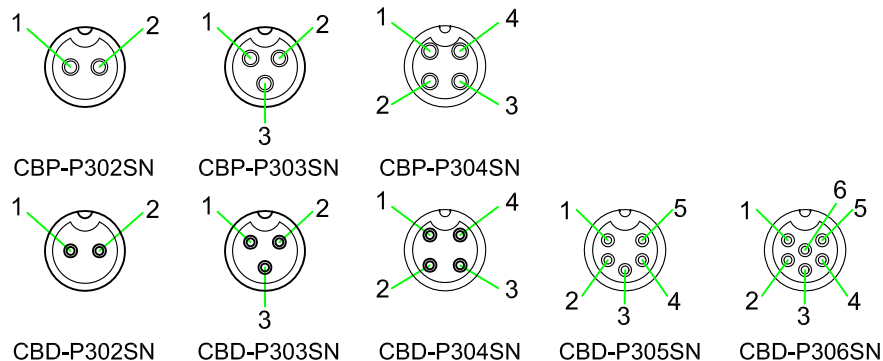

PIN ASSIGNMENT FRONT VIEW
(前視圖)

3	OVERMOLD	PVC or PU.	BLACK	1	
2	CONTACT	Brass ,Female Pin. 6u" Gold Plated.		N	
1	CONNECTOR	B Size Male Connector Insert, NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司			
	UNIT: mm	TITLE :	Circular B Size Screw Type Male Connector Female Pin Molded Cable
SCALE	1:1		
UNLESS OTHERWISE SPECIFIED TOLERANCES:		P/N:	CBx-P3xxSN
.x ± 0.25 .xx ± 0.1			
.xxx ± 0.05 ANGLE ± 1°			
REV.	SHEET	DWG.NO:	CBx-P3xxSN
A	1/1		
		DR.	Patty
		CH.	ERIC
		AP.	