

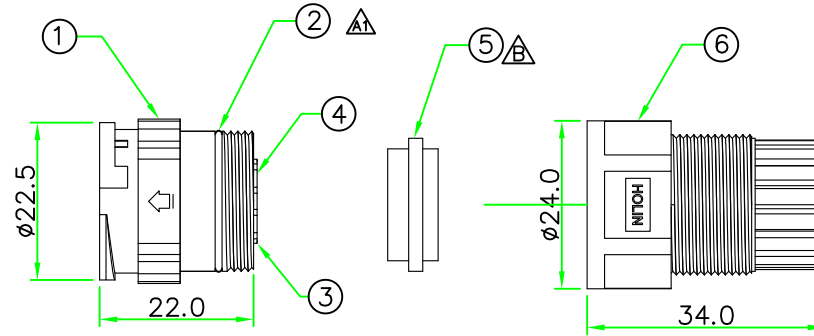

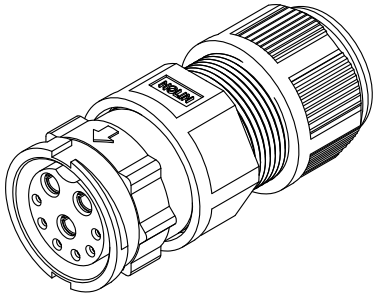


RoHS

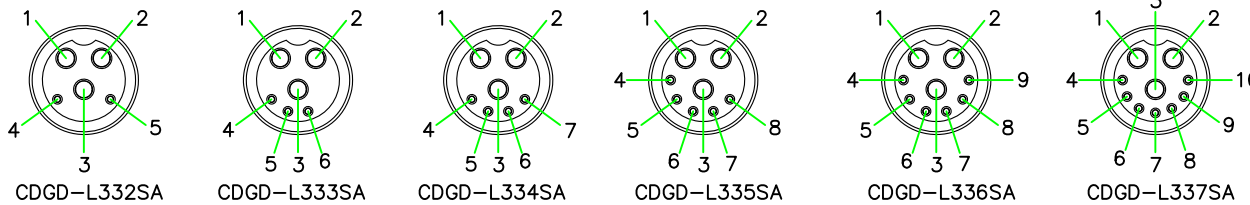


REV.	DESCRIPTION	DATE
A	ISSUE	Jun/22/2011
A1	Change O-Ring & tube size.	May/22/2014
B	Modified pin assignment, title, Draw No. & Gasket.	Oct/15/2020

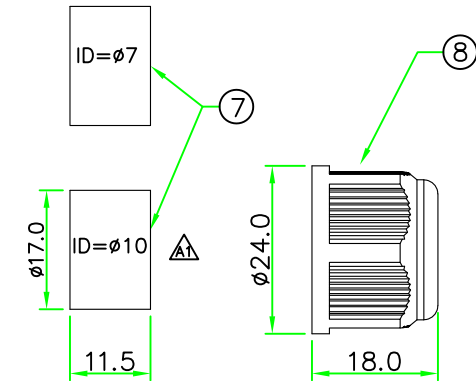

Pin Assignment Front View  
(前視圖)

#2 Zipper PE Bag.

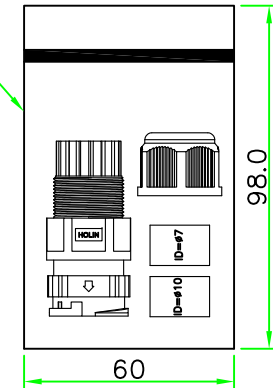

8	CLAMP NUT	NYLON+GF.	BLACK	1	
7	TUBE	Rubber ( ID= 7.0 & 10.0mm)	BLACK	2	
6	HOOD	NYLON.	BLACK	1	
5	GASKET	Rubber	BLACK	1	
4	CONTACT	BRASS ,Female Pin. 6u"Gold Plated.		N	
3	CONTACT	BRASS ,Female Pin. 6u"Gold Plated.		N	
2	O-RING	NBR.	BLACK	1	
1	CONNECTOR	CDGD Male Connector Insert, NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

<b>HOLIN®</b> HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司		TITLE : Circular D Size Lock Type Male Connector Female Pin Field Installable Plug	
	UNIT: mm	P/N: CDGD-L3xxSA	
SCALE	1:1		DR. SIBYL
UNLESS OTHERWISE SPECIFIED TOLERANCES: x ±0.25 xx ±0.1 xxx ±0.05 ANGLE ±1°		CH. JAMES	
REV.	SHEET	DWG.NO:	AP.
B	1/1	CDGD-L3xxSA	